

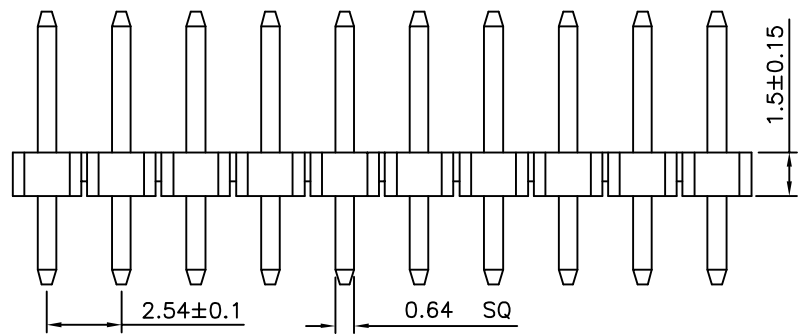


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION
 Current Rating:3 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

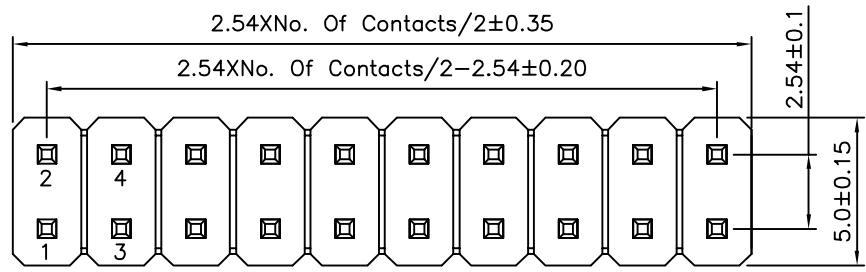

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
00014		MEI		X. ± 0.25 X.* $\pm 2^{\circ}$					
		CHECKED BY		.X ± 0.20 .X* $\pm 1.5^{\circ}$					
		DRAWING BY		.XX ± 0.15 .XX* $\pm 1^{\circ}$					
		CYP		.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$					
SCALE	NONE	REV.	A0	UNIT	mm	NO. REV.	A0	NEW RELEASE	09/17/2015
						REVISIONS		CHK	DATE