
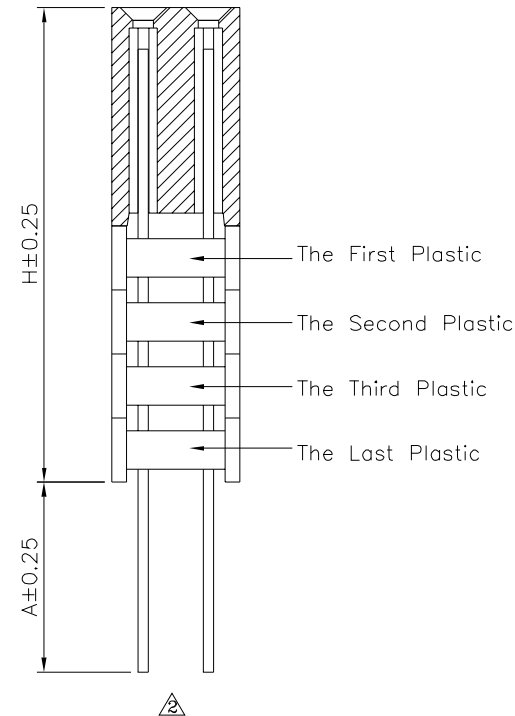


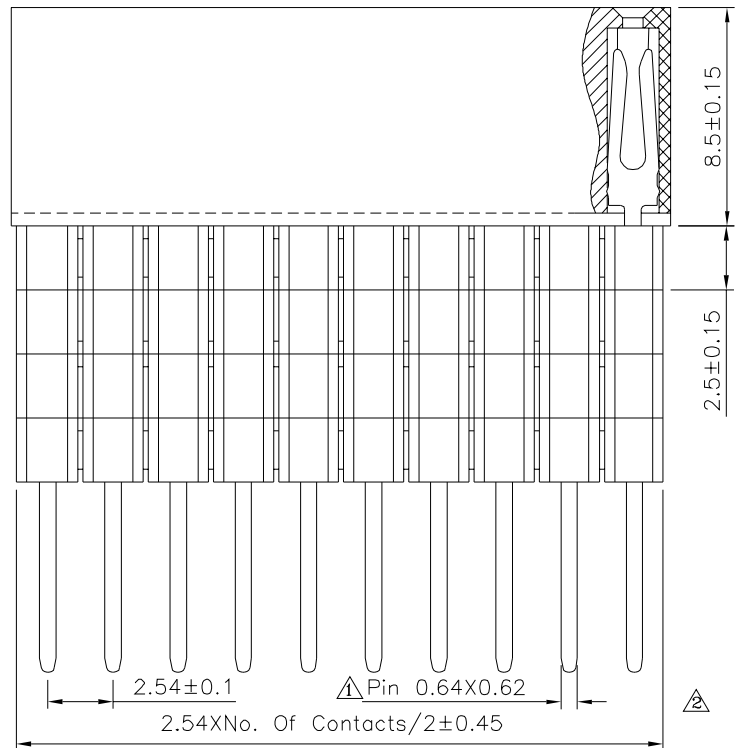

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00160

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

HAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

$\triangle x$	± 0.30	x^*	$\pm 2^*$
$.x$	± 0.25	$.x^*$	$\pm 1.5^*$
$.xx$	± 0.20	$.xx^*$	$\pm 1.0^*$
$.xxx$	± 0.15	$.xxx^*$	$\pm 0.5^*$

UNIT	mm
------	----



2	A2	
1	A1	
0	A0	
NO. REV		

	Modify Data
	Modify Data
	NEW RELEASE
1/	REV

a
a
SE
VISIONS

	HZF	01/26/2024
	HZF	12/20/2023
	HZF	05/03/2014
	CHK	DATE

SPECIFICATION

Current Rating:3A

- ⚠ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:−40°C~+105°C
 ⚠ Insulator:PA9T(UL94V−O),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant