File No.	697NF27806	SHEET	1/1

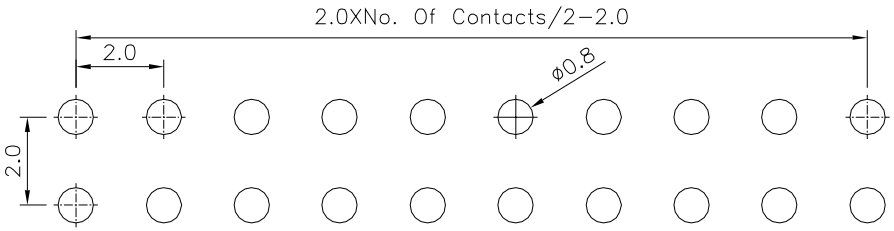

2 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

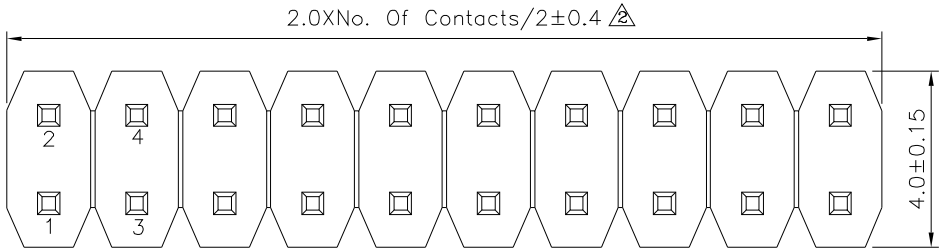

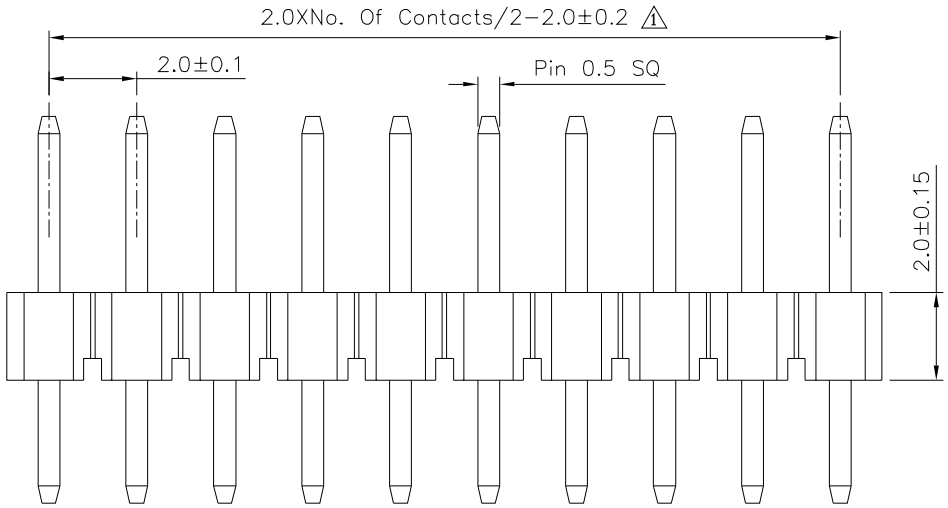

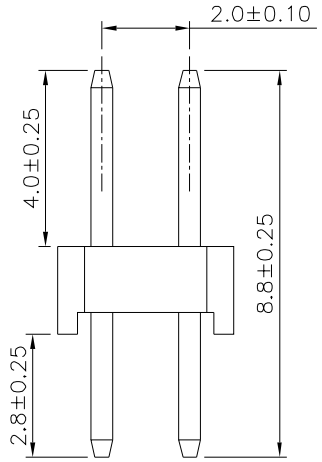

2 SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	MEI
00213	CHECKED BY	HZF
	DRAWING BY	CYP
SCALE NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	06/27/2023
1	A1	Modify Data	HZF	05/31/2016
0	A0	NEW RELEASE	HZF	07/06/2013