



File No.	697NF27806	SHEET	1/1

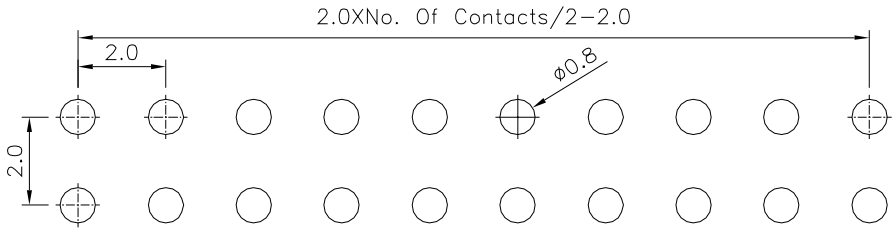

△2 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

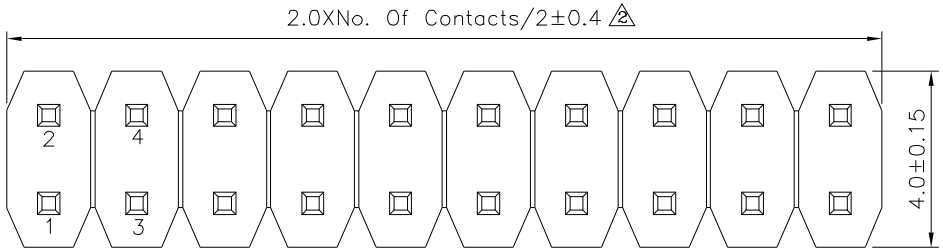

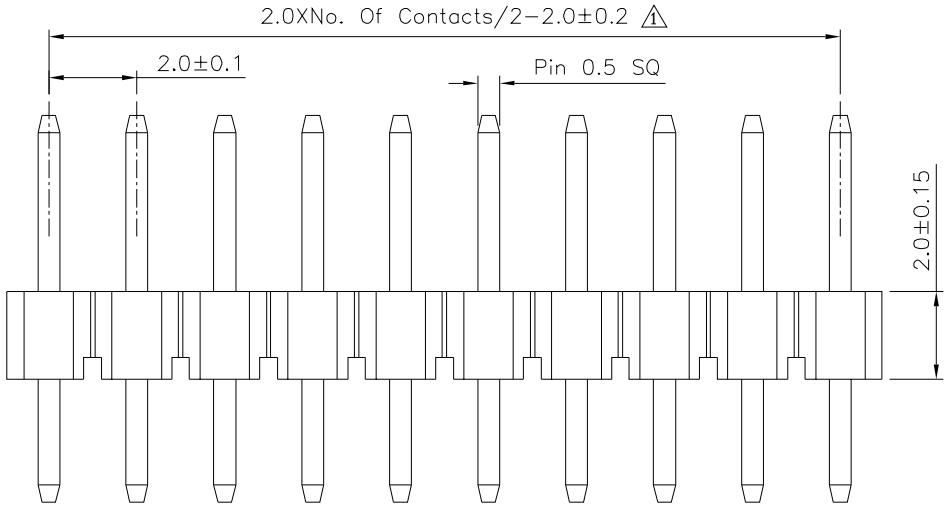

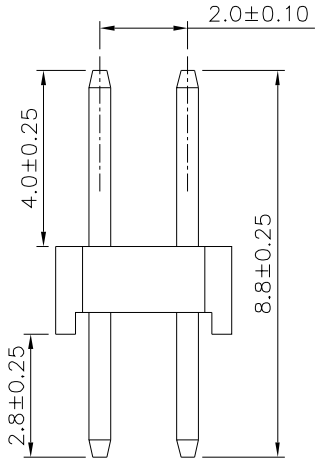

△2 SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	00215		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	06/27/2023
△1	A1	Modify Data	HZF	05/31/2016
△0	A0	NEW RELEASE	HZF	07/06/2013