
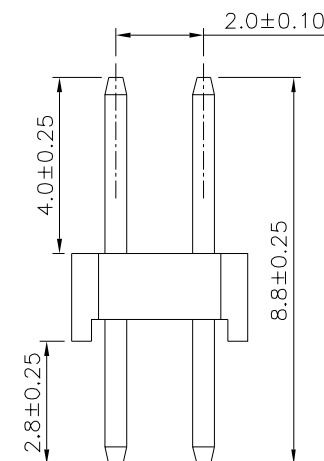
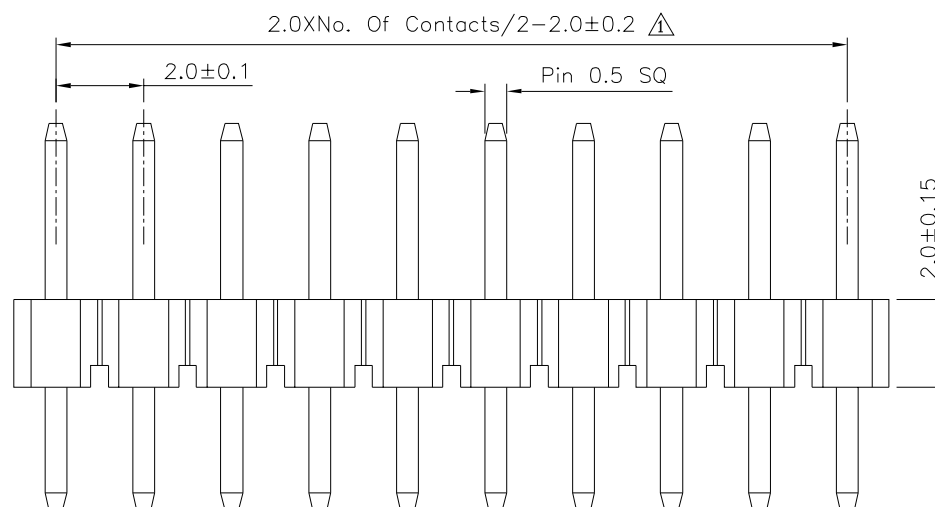


2 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

2 SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

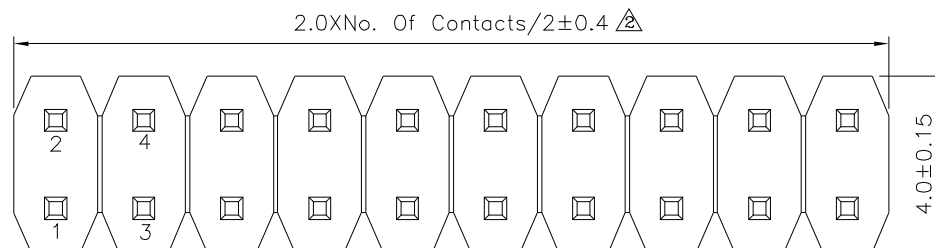

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

00220

SCALE

NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

UNIT
mm

NO	REV
----	-----

REVISIONS

CHK

DATE

$\triangle 2$	A2
---------------	----

2	Modify Data
---	-------------

HZF

06/27/2023

5°		
		A 1

Modify Data	
-------------	--

H7E

05 / 31 / 2016

5.		A1
		A2

1	Monthly Data
2	NEW RELEASE

1121
1135

05/31/2010	
07/06/2013	