
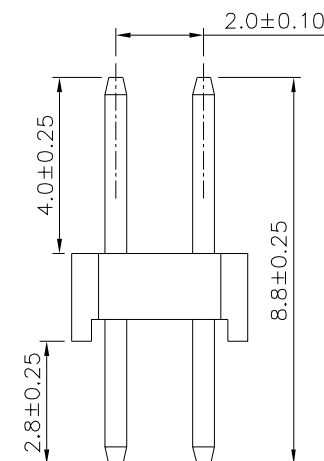
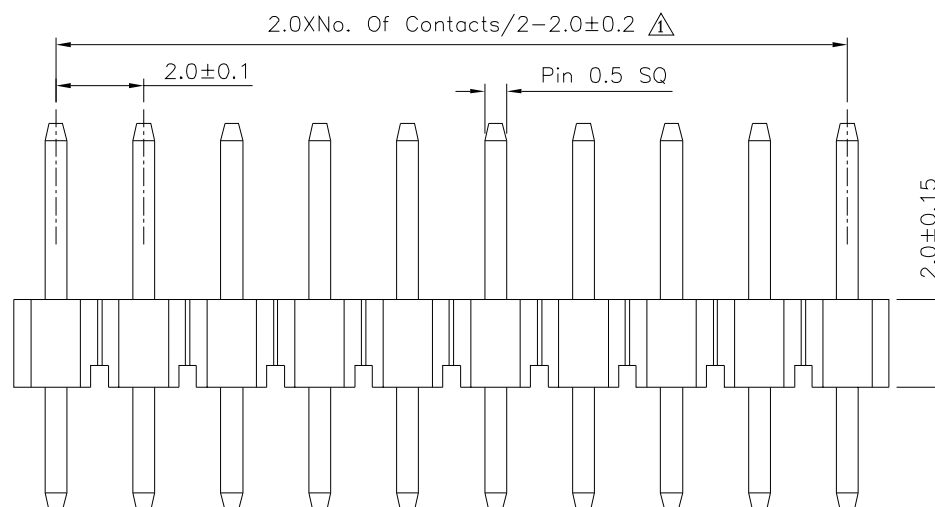


2 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

2 SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

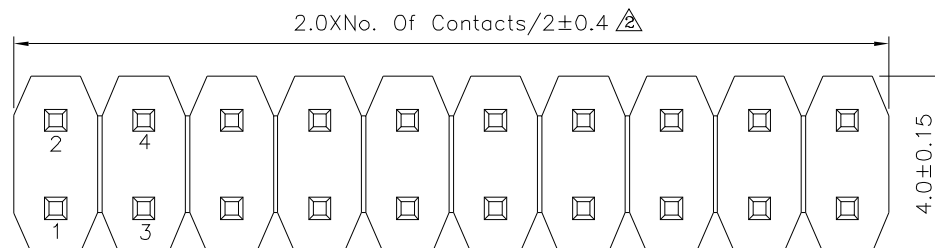

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00229

SCALE	NONE
-------	------

APPROVED BY

MEI

CHECKED BY


HZF

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

UNIT
12.12

NO	REV
----	-----

REVISIONS

CHK

DATE