
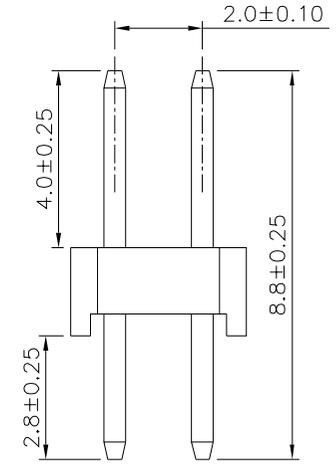
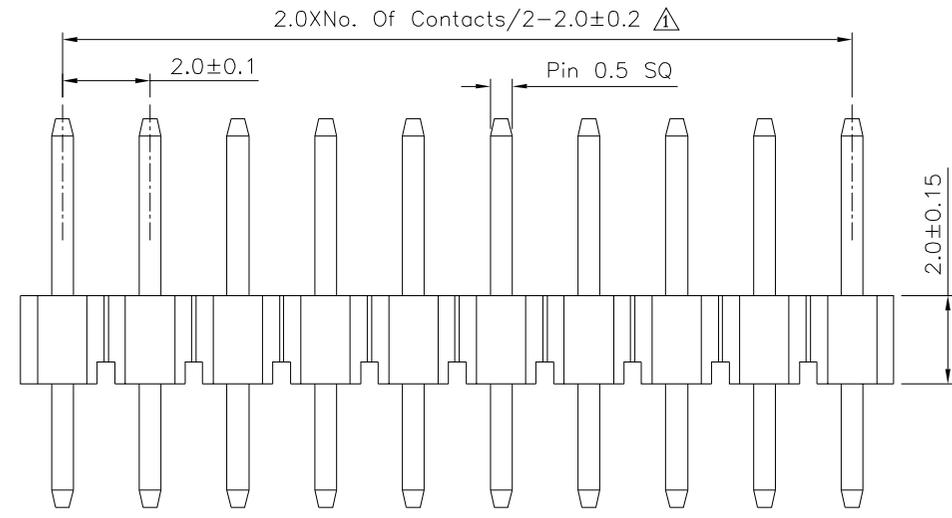


△ Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ± 0.05)

△ SPECIFICATION
 Current Rating: 1.5 Amps
 Withstanding Voltage: 500V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Insulator: PA9T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

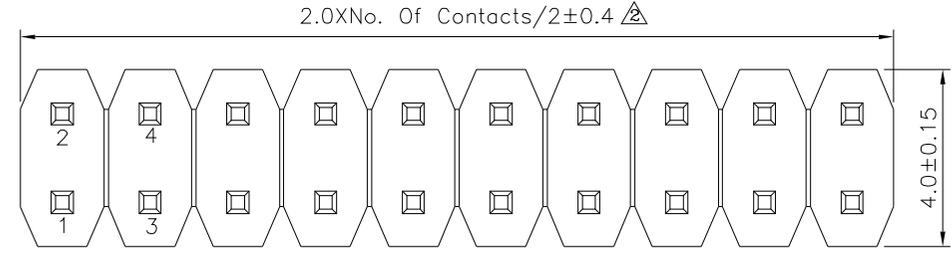

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* $\pm 2^{\circ}$.X ± 0.20 .X* $\pm 1.5^{\circ}$.XX ± 0.15 .XX* $\pm 1^{\circ}$.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$				
00230		MEI			△ A2	Modify Data	HZF	06/27/2023
		HZF			△ A1	Modify Data	HZF	05/31/2016
SCALE		REV.			△ A0	NEW RELEASE	HZF	07/06/2013
NONE		A2		NO. REV.	REVISIONS	CHK	DATE	

