
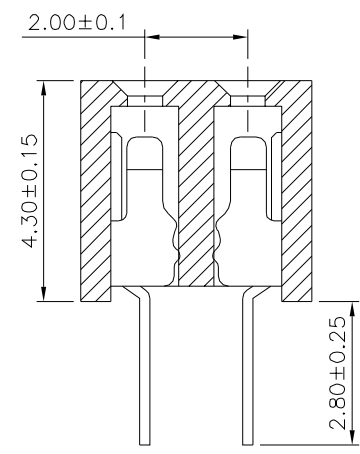
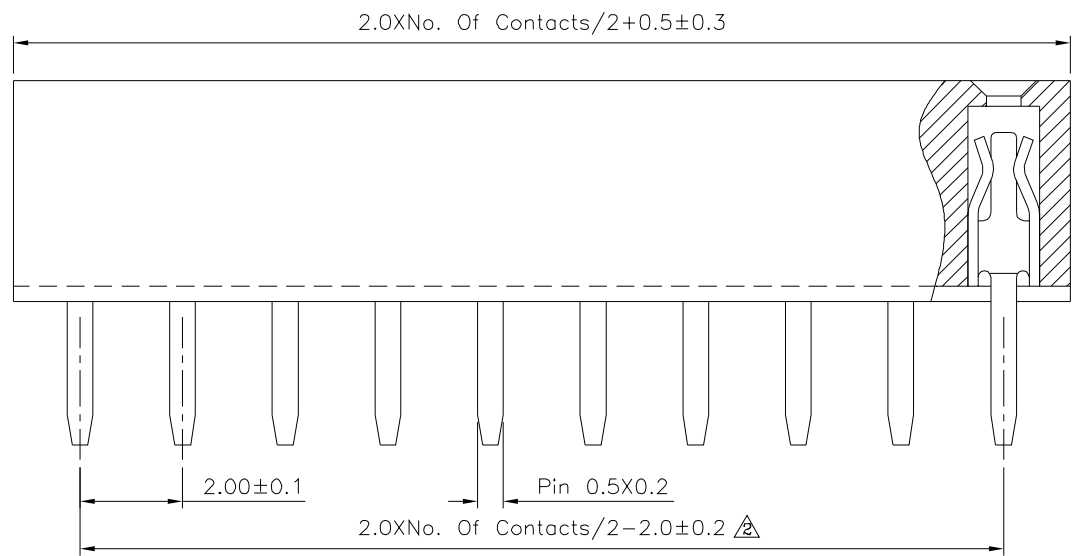


Recommended P.C.B. Layout

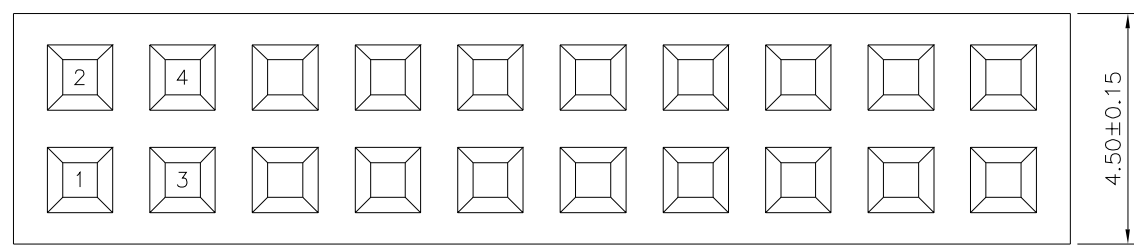

SPECIFICATION
 Current Rating:1.5 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | |
|-------------|------|-------------|----|
| DRAWING No. | | APPROVED BY | |
| 00311 | | MEI | |
| | | CHECKED BY | |
| | | HZF | |
| | | DRAWING BY | |
| | | CYP | |
| SCALE | NONE | REV. | A2 |

| | | | | |
|-------------------------------------------|-------|-------------|-------|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | | | |
| X. | ±0.25 | X.* | ±2° | |
| .X | ±0.20 | .X* | ±1.5° | |
| .XX | ±0.15 | .XX* | ±1° | |
| .XXX | ±0.10 | .XXX* | ±0.5° | |
| UNIT | mm | | | |
| NO. | REV. | REVISIONS | CHK | DATE |
| △2 | A2 | Modify Data | HZF | 11/23/2016 |
| △1 | A1 | Modify Data | HZF | 04/17/2014 |
| △0 | A0 | NEW RELEASE | HZF | 12/11/2013 |