
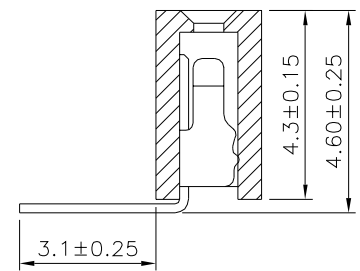
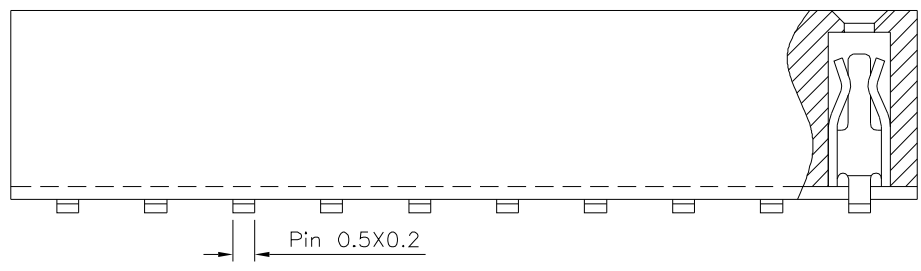


Recommended P.C.B. Layout(Top Side) Δ
(PCB Board Tolerance ± 0.05)

SPECIFICATION
 Current Rating:1.5 Amps
 Δ Withstand Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Δ Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

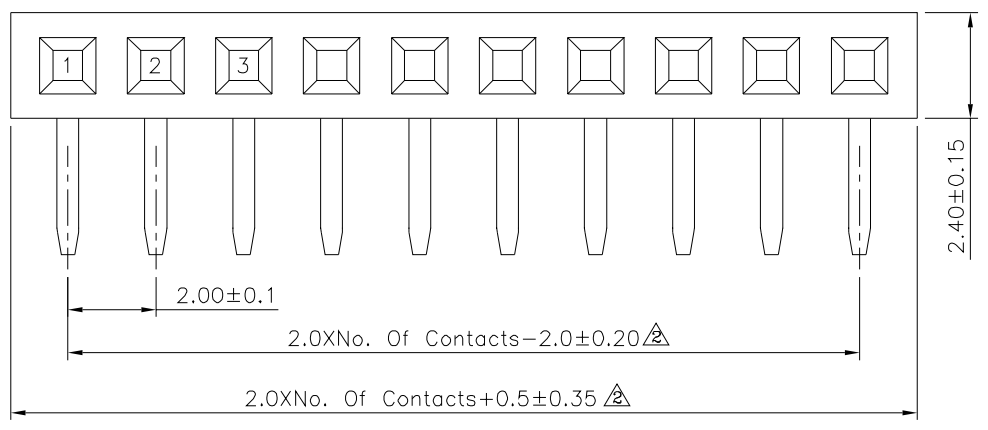

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE Δ X. ± 0.25 X.* $\pm 2^{\circ}$.X ± 0.20 .X* $\pm 1.5^{\circ}$.XX ± 0.15 .XX* $\pm 1^{\circ}$.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$		
00365		MEI				
		CHECKED BY				
		HZF				
		DRAWING BY		UNIT		
		SONG		mm		
SCALE	NONE	REV.	A2			

Δ	A2	Modify Data	HZF	07/29/2021	
Δ	A1	Modify Data	HZF	05/08/2014	
Δ	A0	NEW RELEASE	HZF	07/30/2011	
NO.	REV.	REVISIONS	CHK	DATE	