


File No.	6970121806	SHEET	1/1

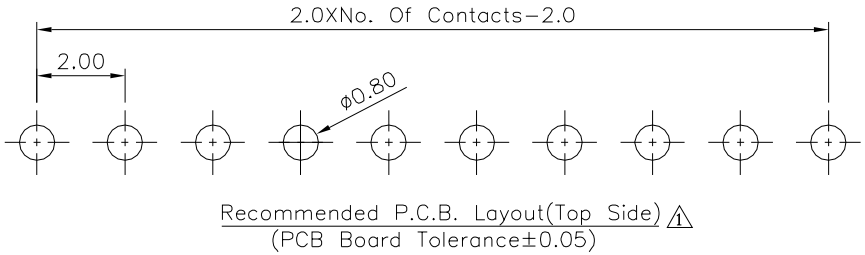


Recommended P.C.B. Layout(Top Side) ⚠1
(PCB Board Tolerance±0.05)

SPECIFICATION
Current Rating:1.5A
⚠2 Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature Range:−40°C~+105°C
⚠3 Insulator:PA9T(UL94V−0),Black
⚠1 Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

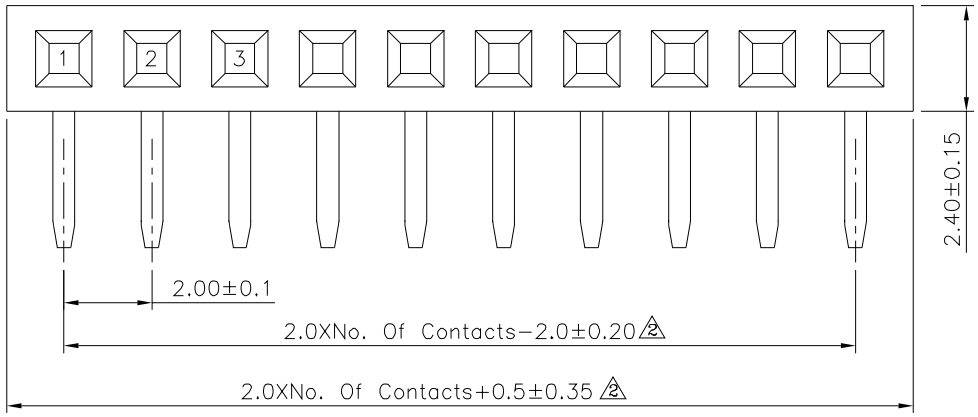

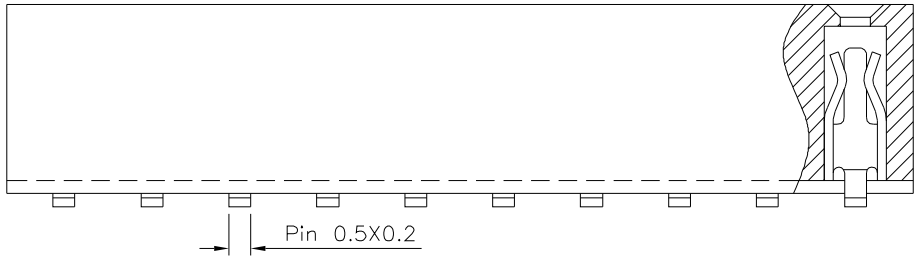



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	00365		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	SONG		
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
⚠1 X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠3	A3	Modify Data	HZF	09/21/2024
⚠2	A2	Modify Data	HZF	07/29/2021
⚠1	A1	Modify Data	HZF	05/08/2014
⚠0	A0	NEW RELEASE	HZF	07/30/2011