

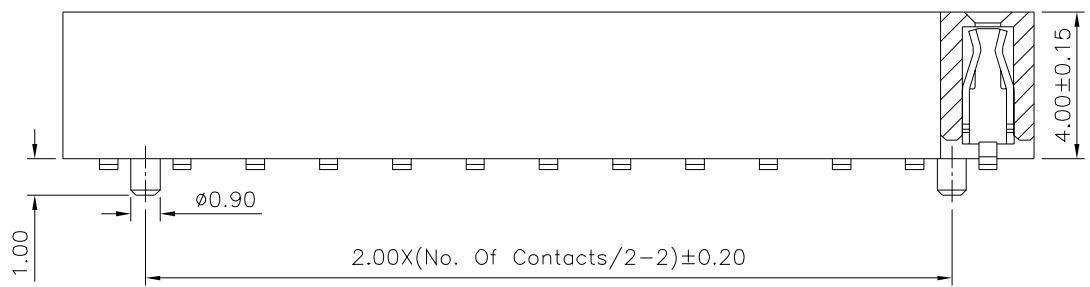


Recommended P.C.B. Layout

△ SPECIFICATION
 Current Rating: 1.5 Amps/Contact Max.
 Withstand Voltage: 450V AC/Minute
 Contact Resistance: 20 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operation Temperature: -55°C ~ +105°C
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 Insulator: PA6T+30%G.F.(UL94V-0), Black
 RoHS Compliant

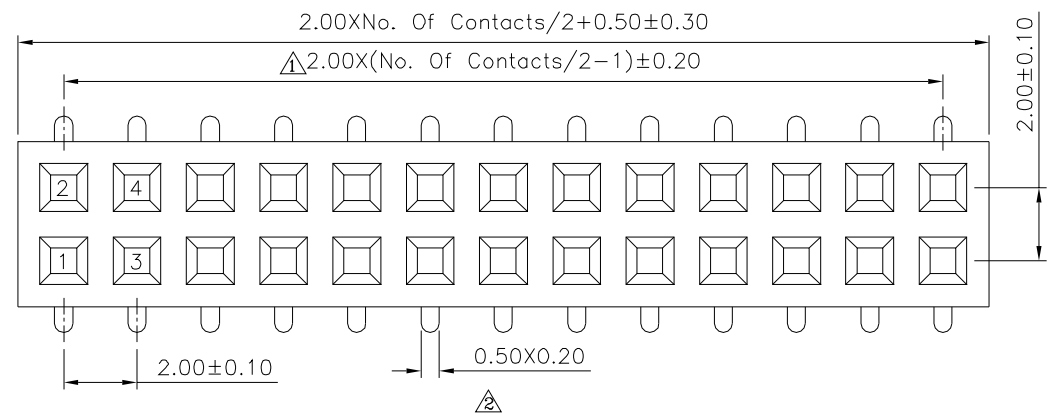

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
00427		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
△	X.	±0.25		
△	.X	±0.15		
△	.XX	±0.10		
△	.XXX	±0.05		
	ANG.	±5°		
UNIT	mm			
NO. REV.	REVISIONS		CHK	DATE
△ A2	Modify Data		HZF	12/06/2017
△ A1	Modify Data		HZF	10/29/2015
△ A0	NEW RELEASE		HZF	08/17/2013