
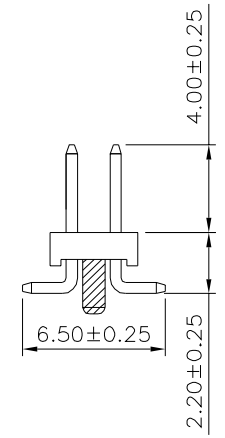
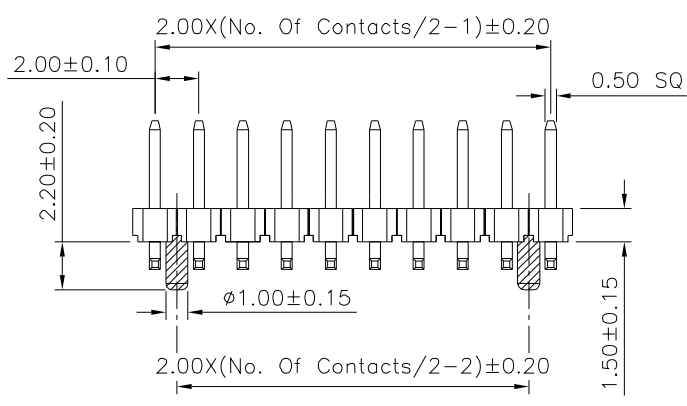


**SPECIFICATION**  
 Current Rating:2A  
 Dielectric Strength:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~80 Contacts  
 RoHS Compliant

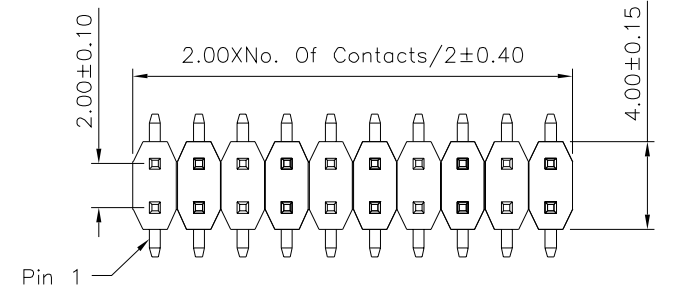

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05
00517		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		GAO		
REV.	B0	NO.	BO	△ B0
				NEW RELEASE
				REVISIONS
				CHK
				DATE


06/02/2022