


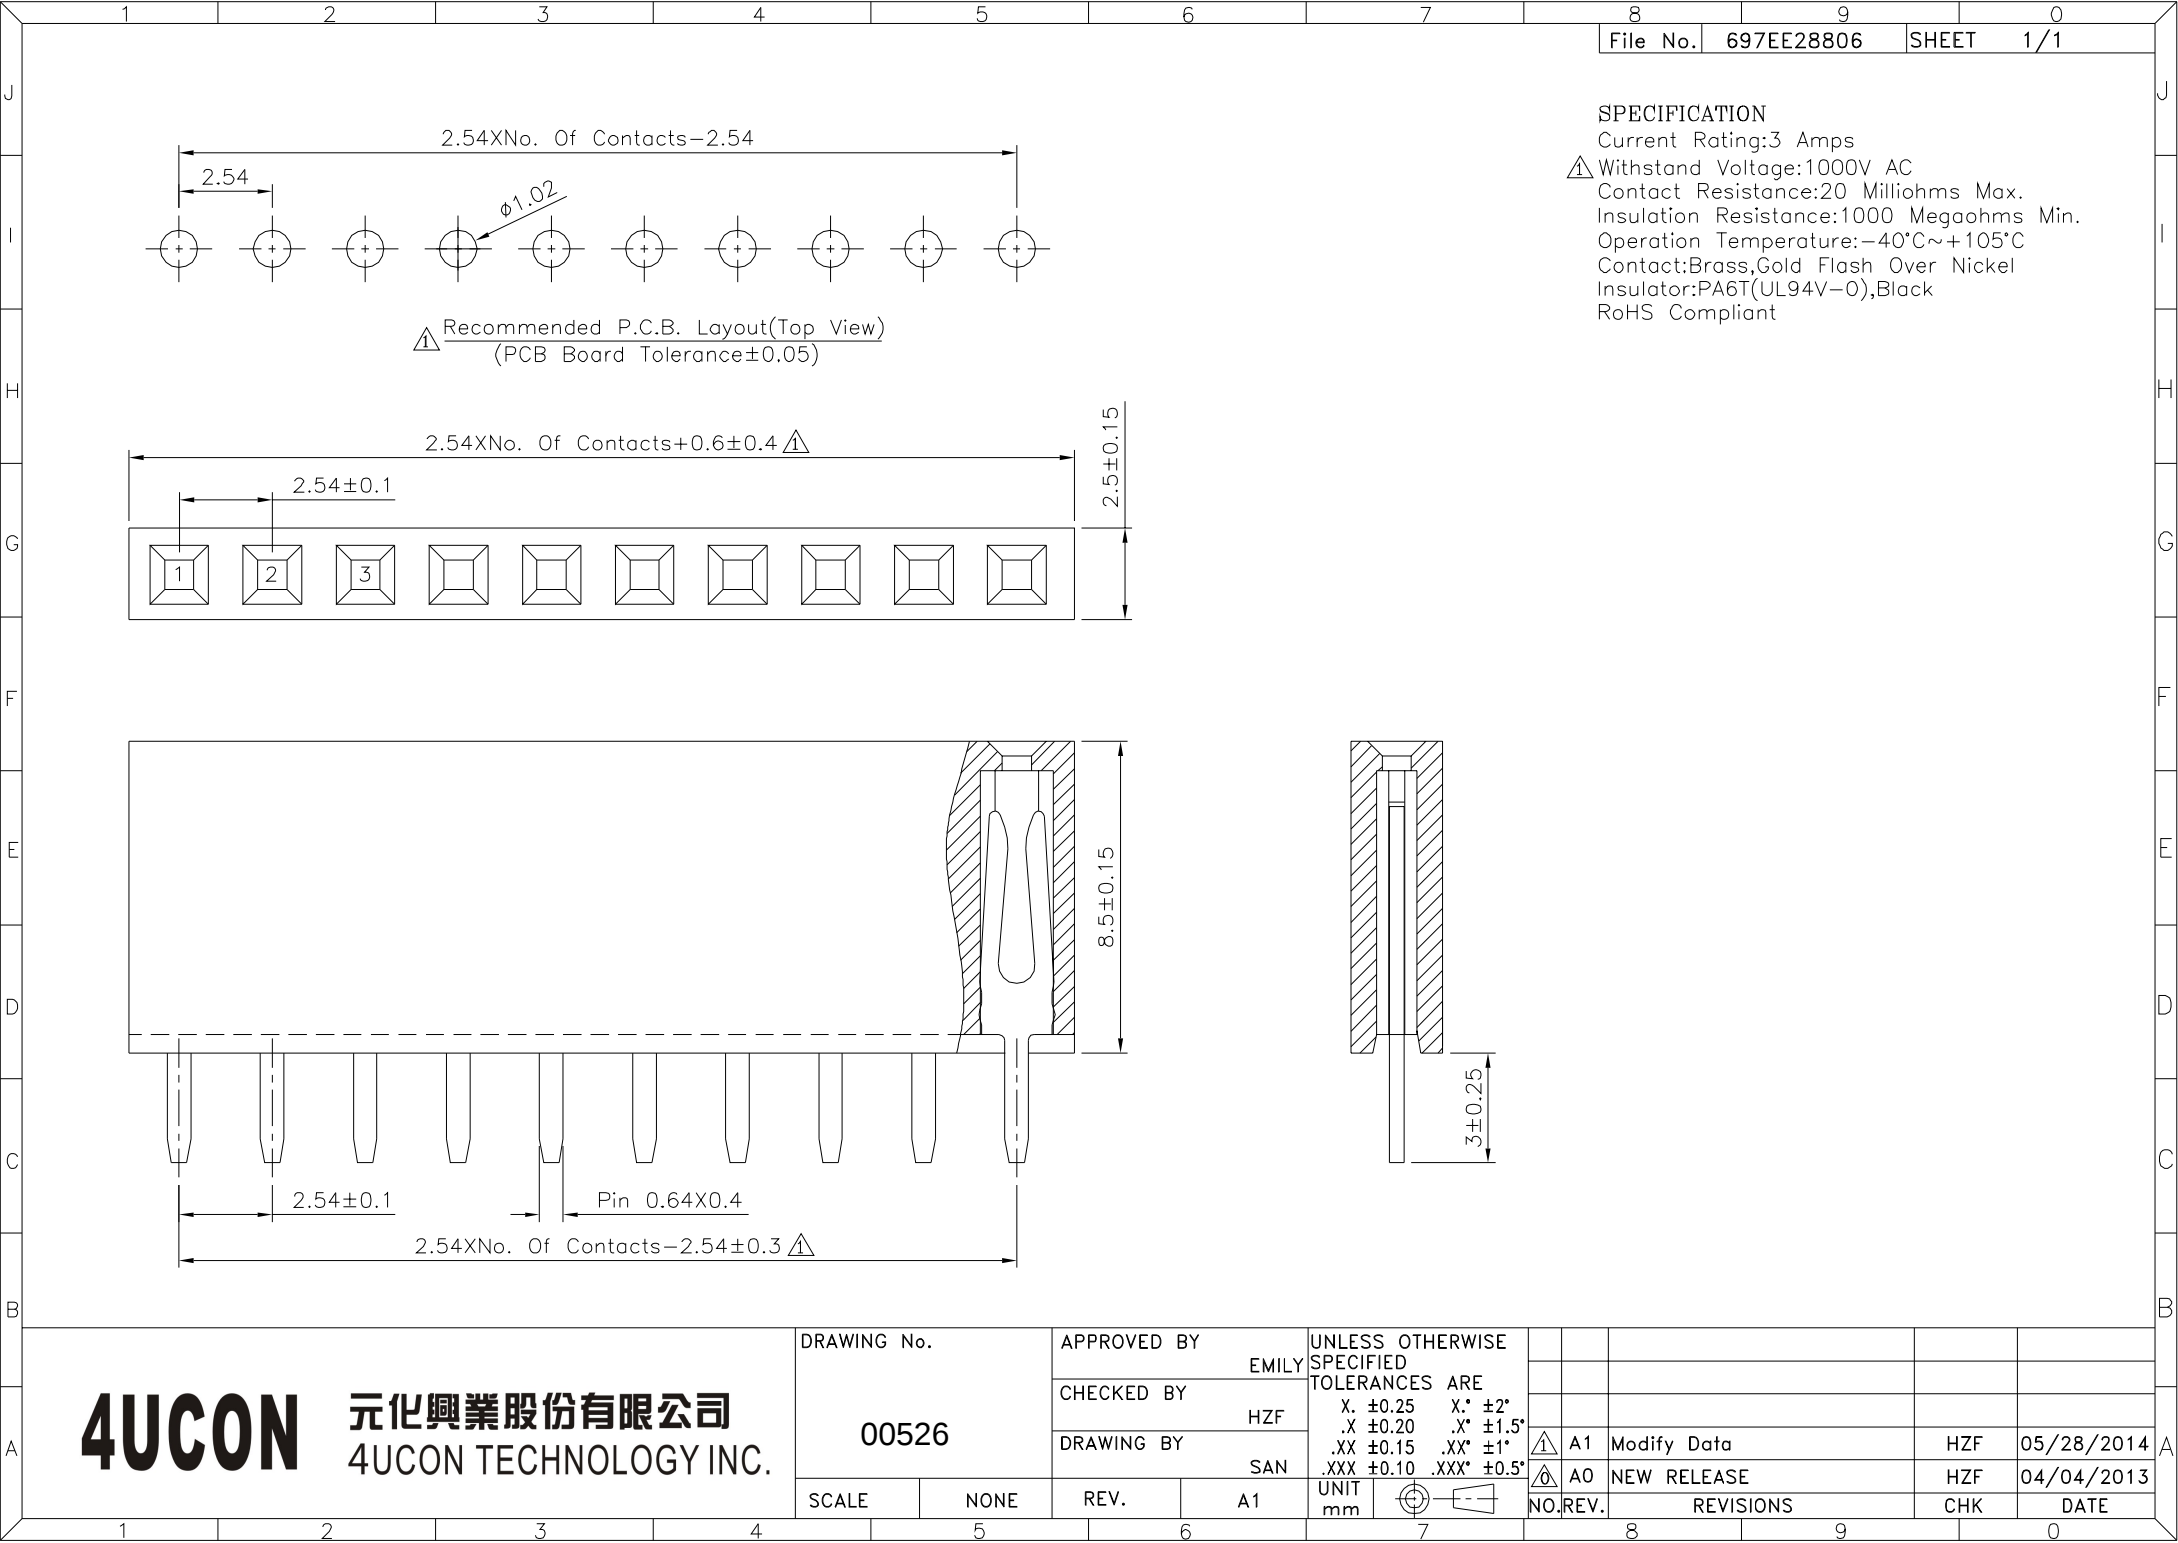

SPECIFICATION
Current Rating:3 Amps
⚠ Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
00526		EMILY	
		CHECKED BY	
		HZF	
		DRAWING BY	
		SAN	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ± 0.25		X.* $\pm 2^\circ$			
.X ± 0.20		.X* $\pm 1.5^\circ$			
.XX ± 0.15		.XX* $\pm 1^\circ$			
.XXX ± 0.10		.XXX* $\pm 0.5^\circ$			
NO.	REV.	REVISIONS		CHK	DATE
⚠ A1		Modify Data		HZF	05/28/2014
⚠ A0		NEW RELEASE		HZF	04/04/2013