


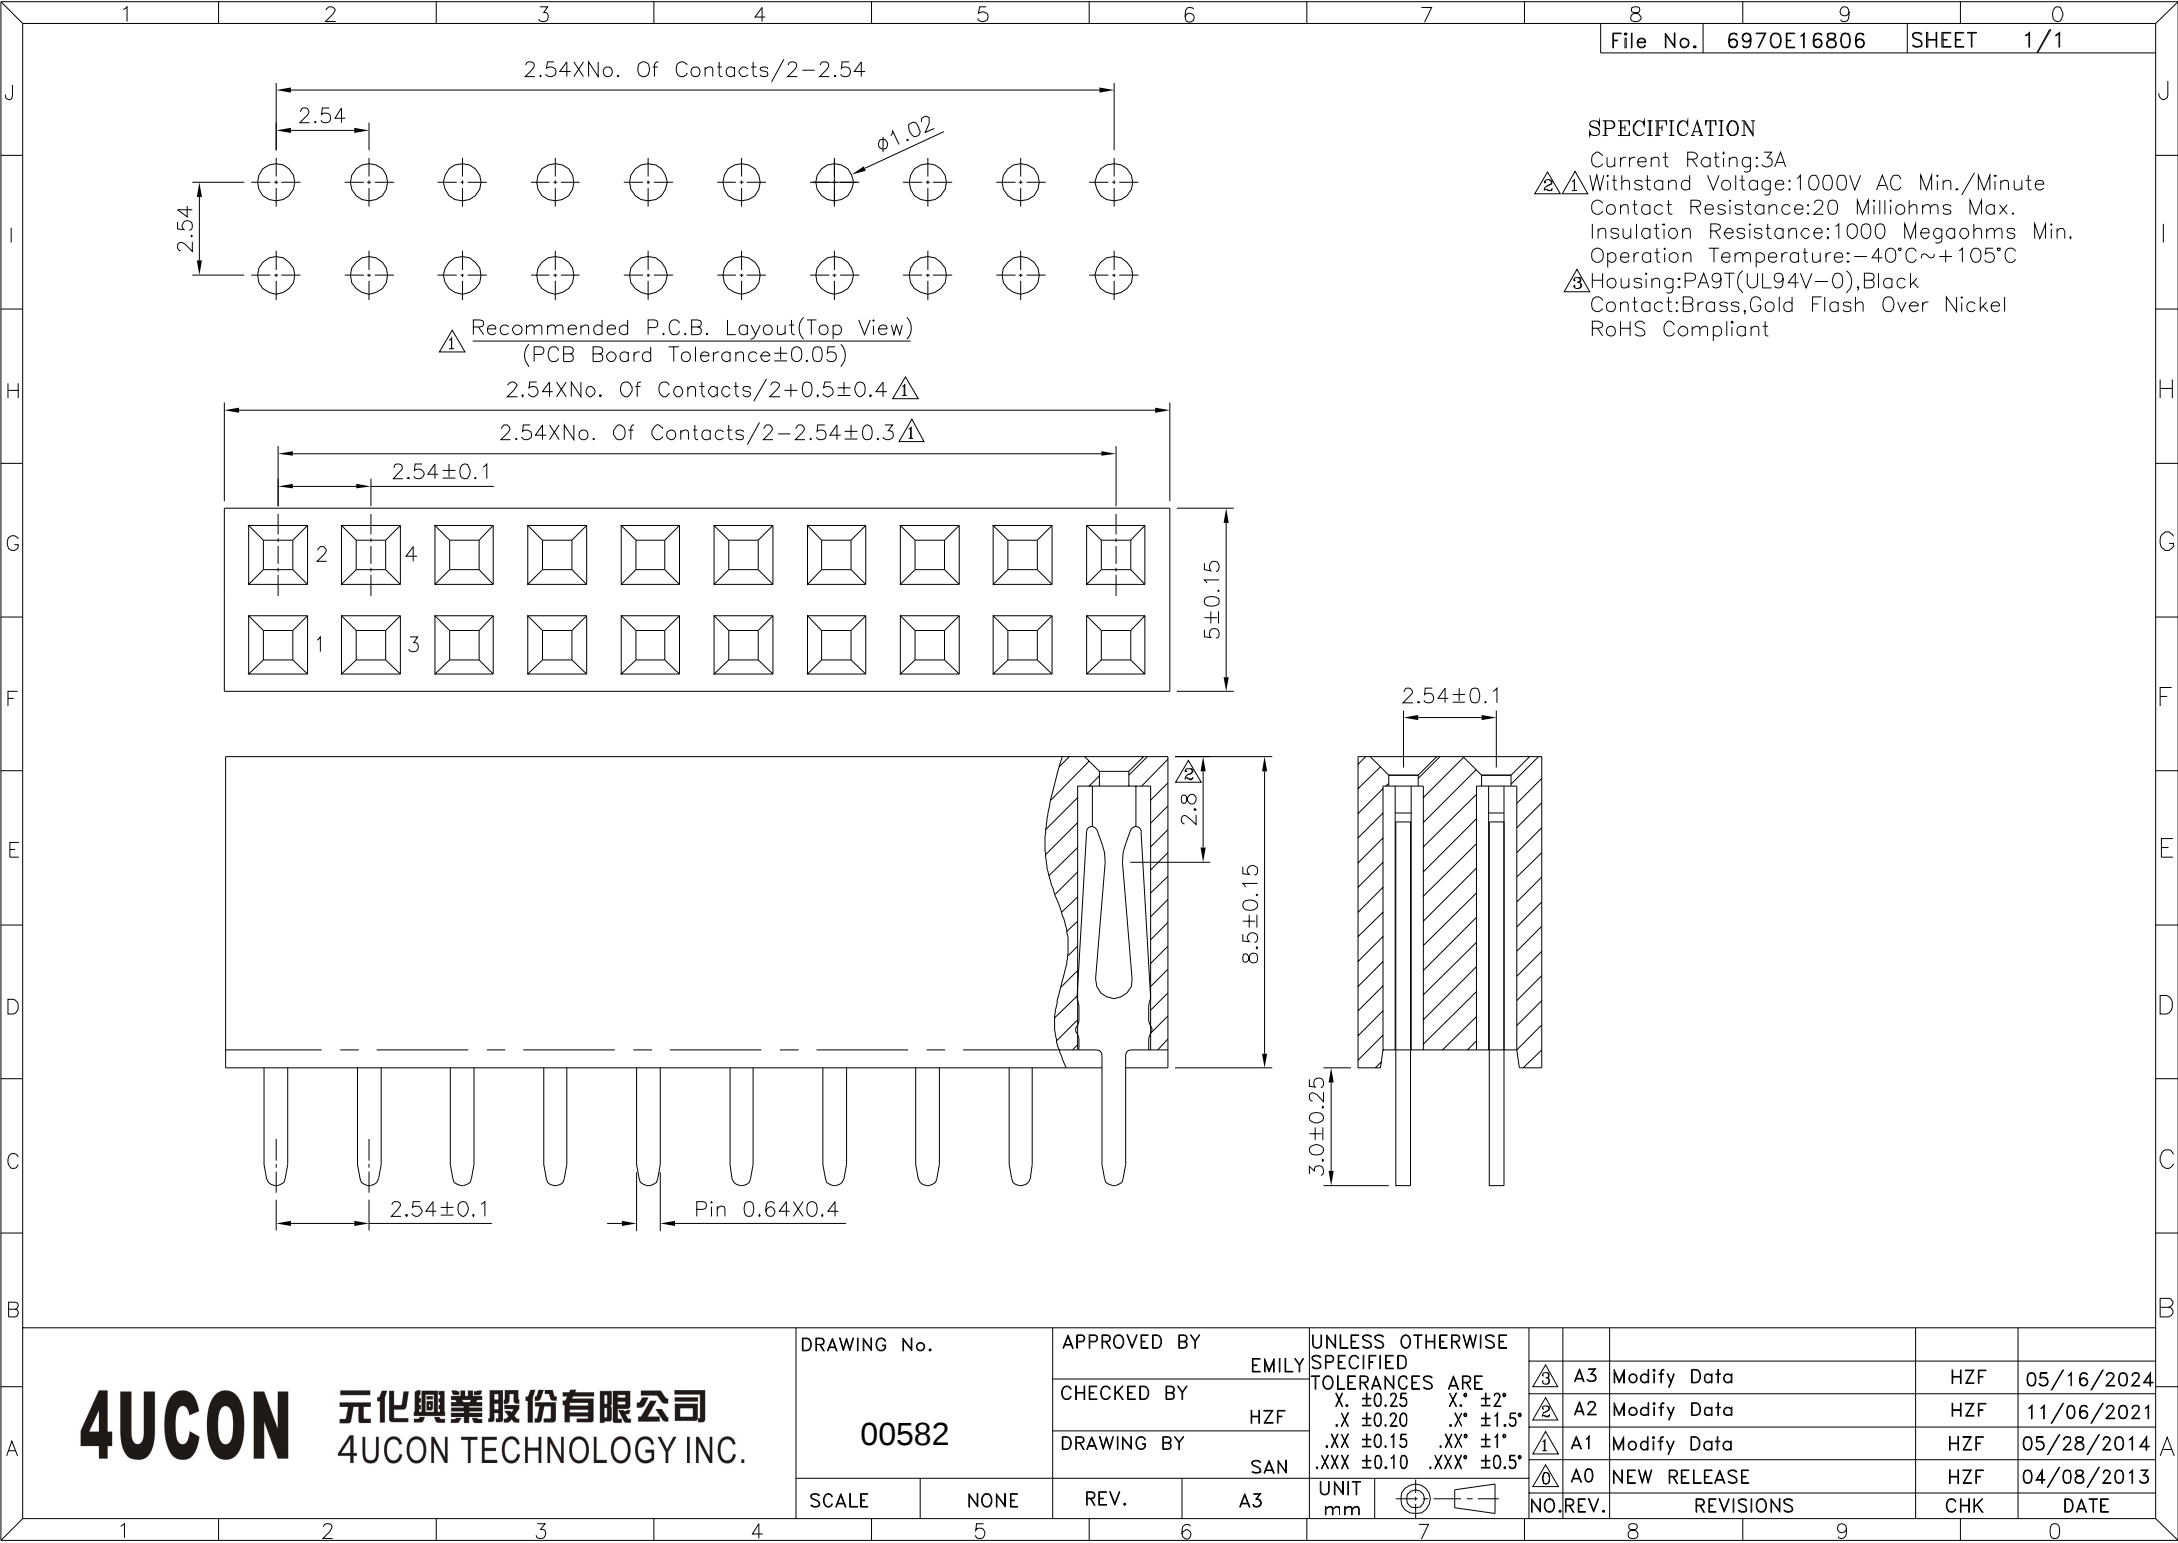

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* ± 2 .X ± 0.20 .X* ± 1.5 .XX ± 0.15 .XX* ± 1 .XXX ± 0.10 .XXX* ± 0.5					
		EMILY			③ A3	Modify Data	HZF	05/16/2024	
		CHECKED BY			② A2	Modify Data	HZF	11/06/2021	
		HZF			① A1	Modify Data	HZF	05/28/2014	
00582		DRAWING BY		SAN	④ A0	NEW RELEASE	HZF	04/08/2013	A
		SAN							
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE