


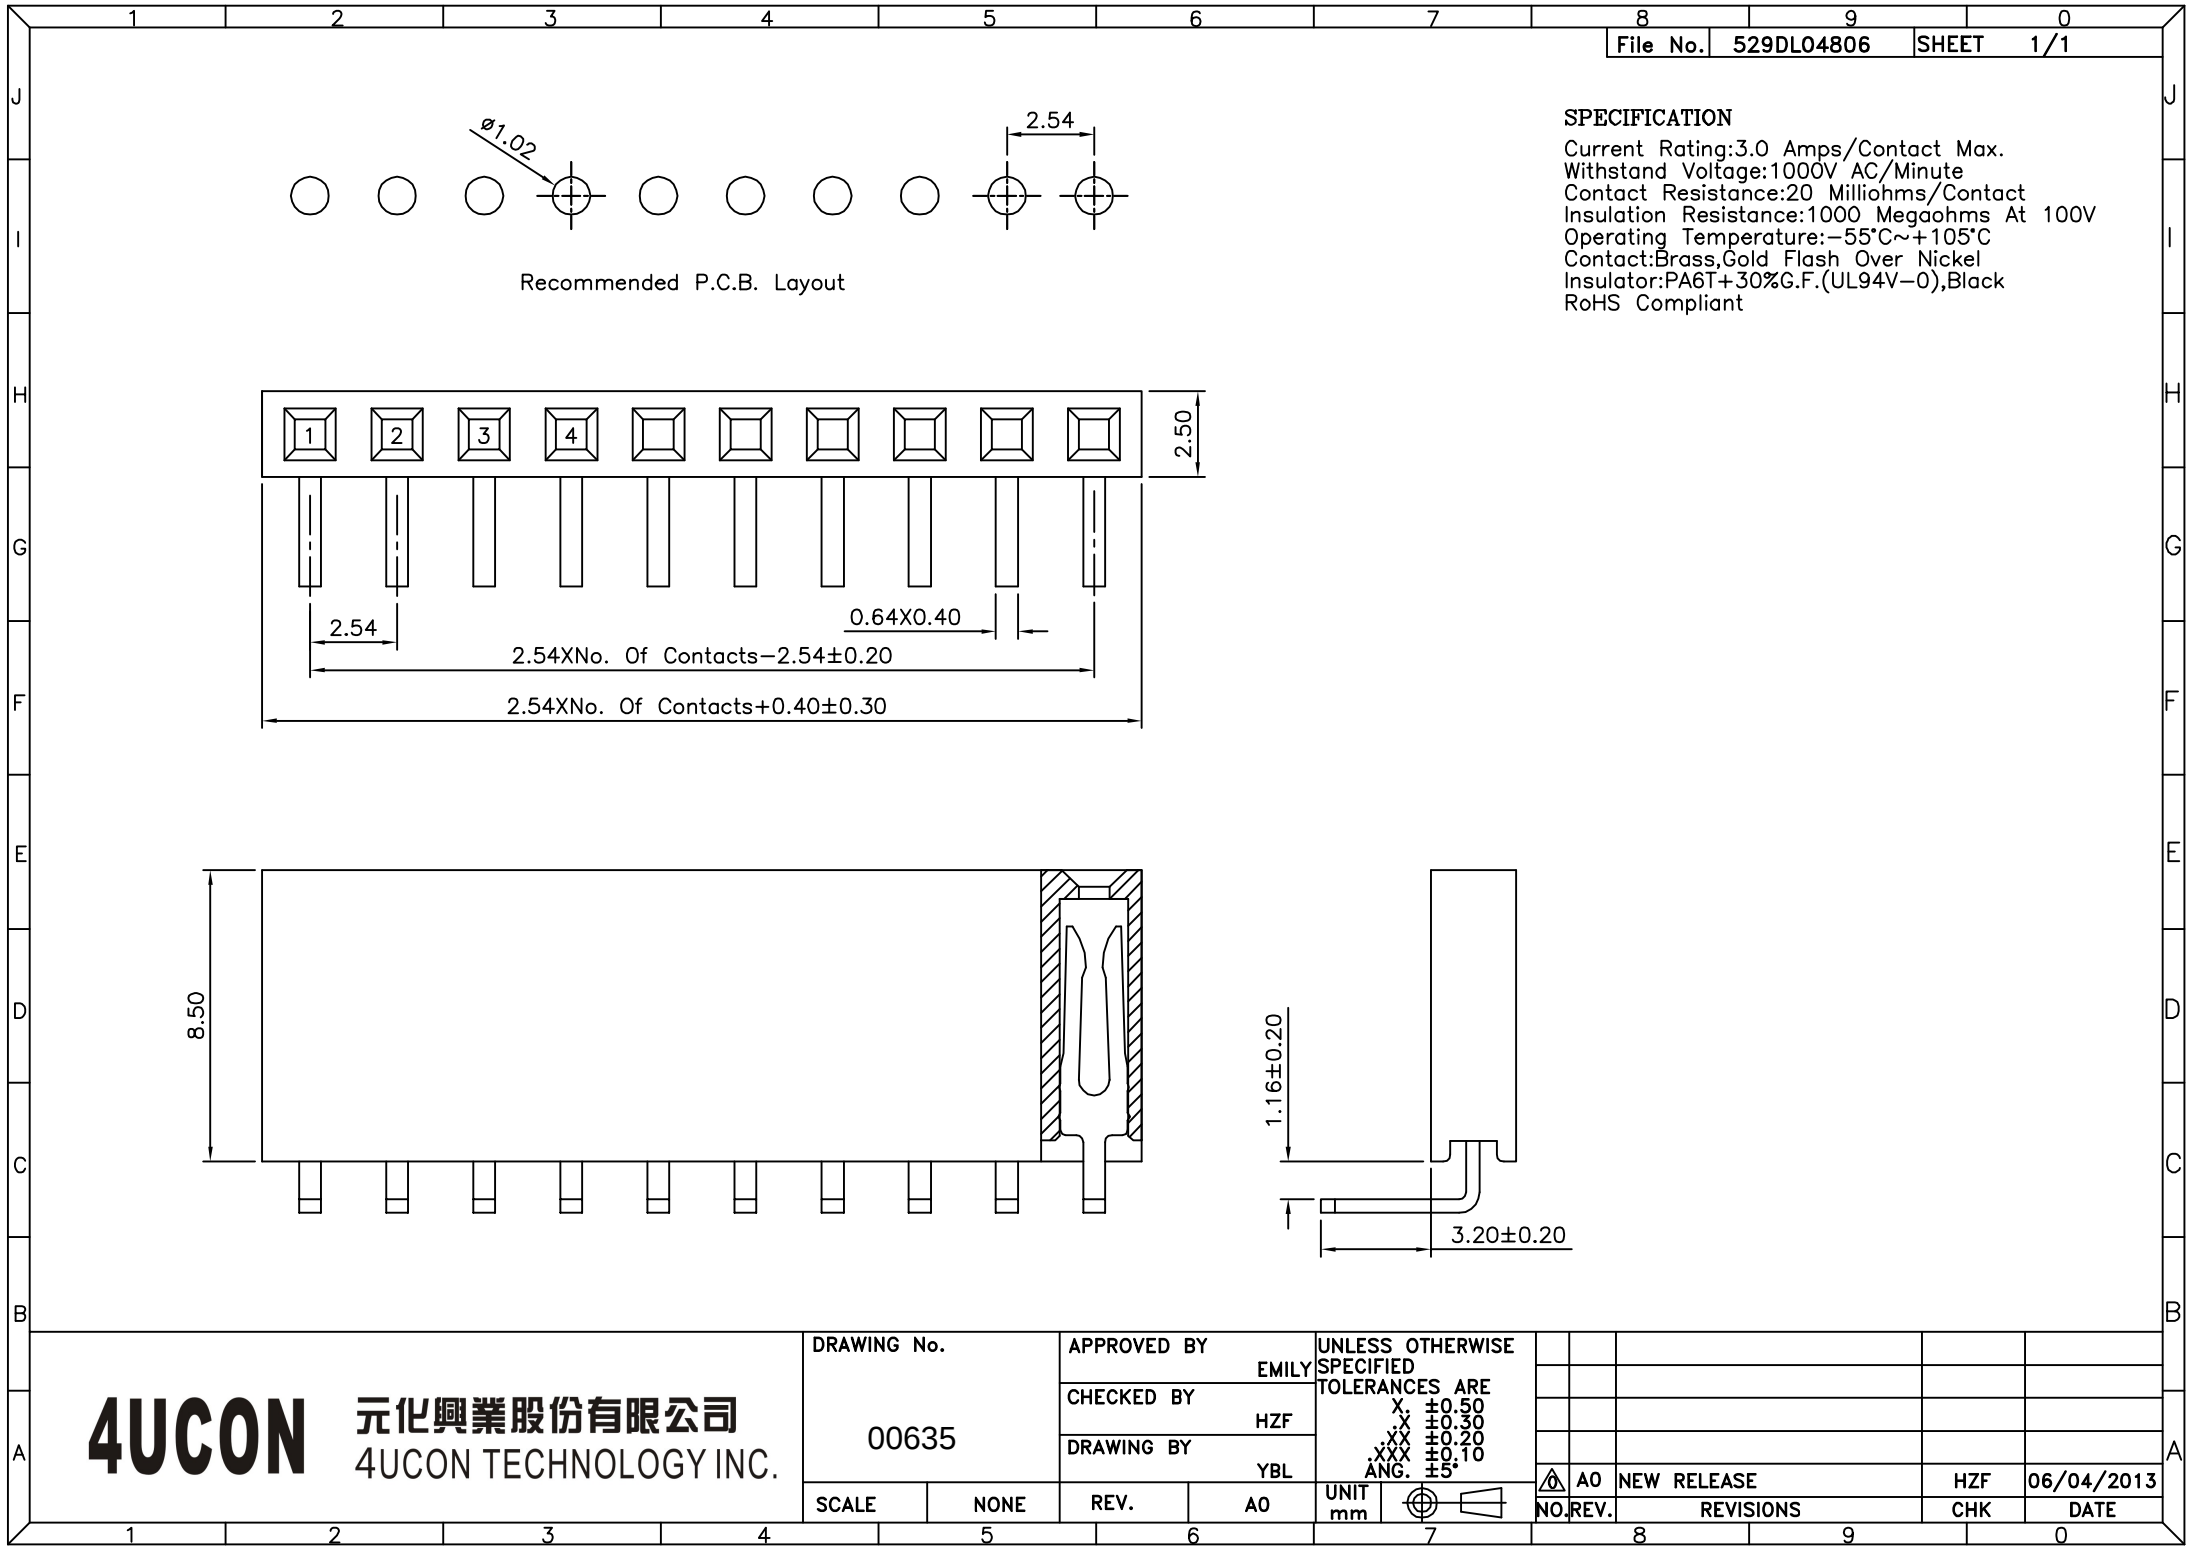

SPECIFICATION
Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms/Contact
Insulation Resistance:1000 Megaohms At 100V
Operating Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
00635		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 ANG. ±5°									
UNIT mm				NO. REV.		REVISIONS		CHK	DATE
				A0		NEW RELEASE		HZF	06/04/2013