


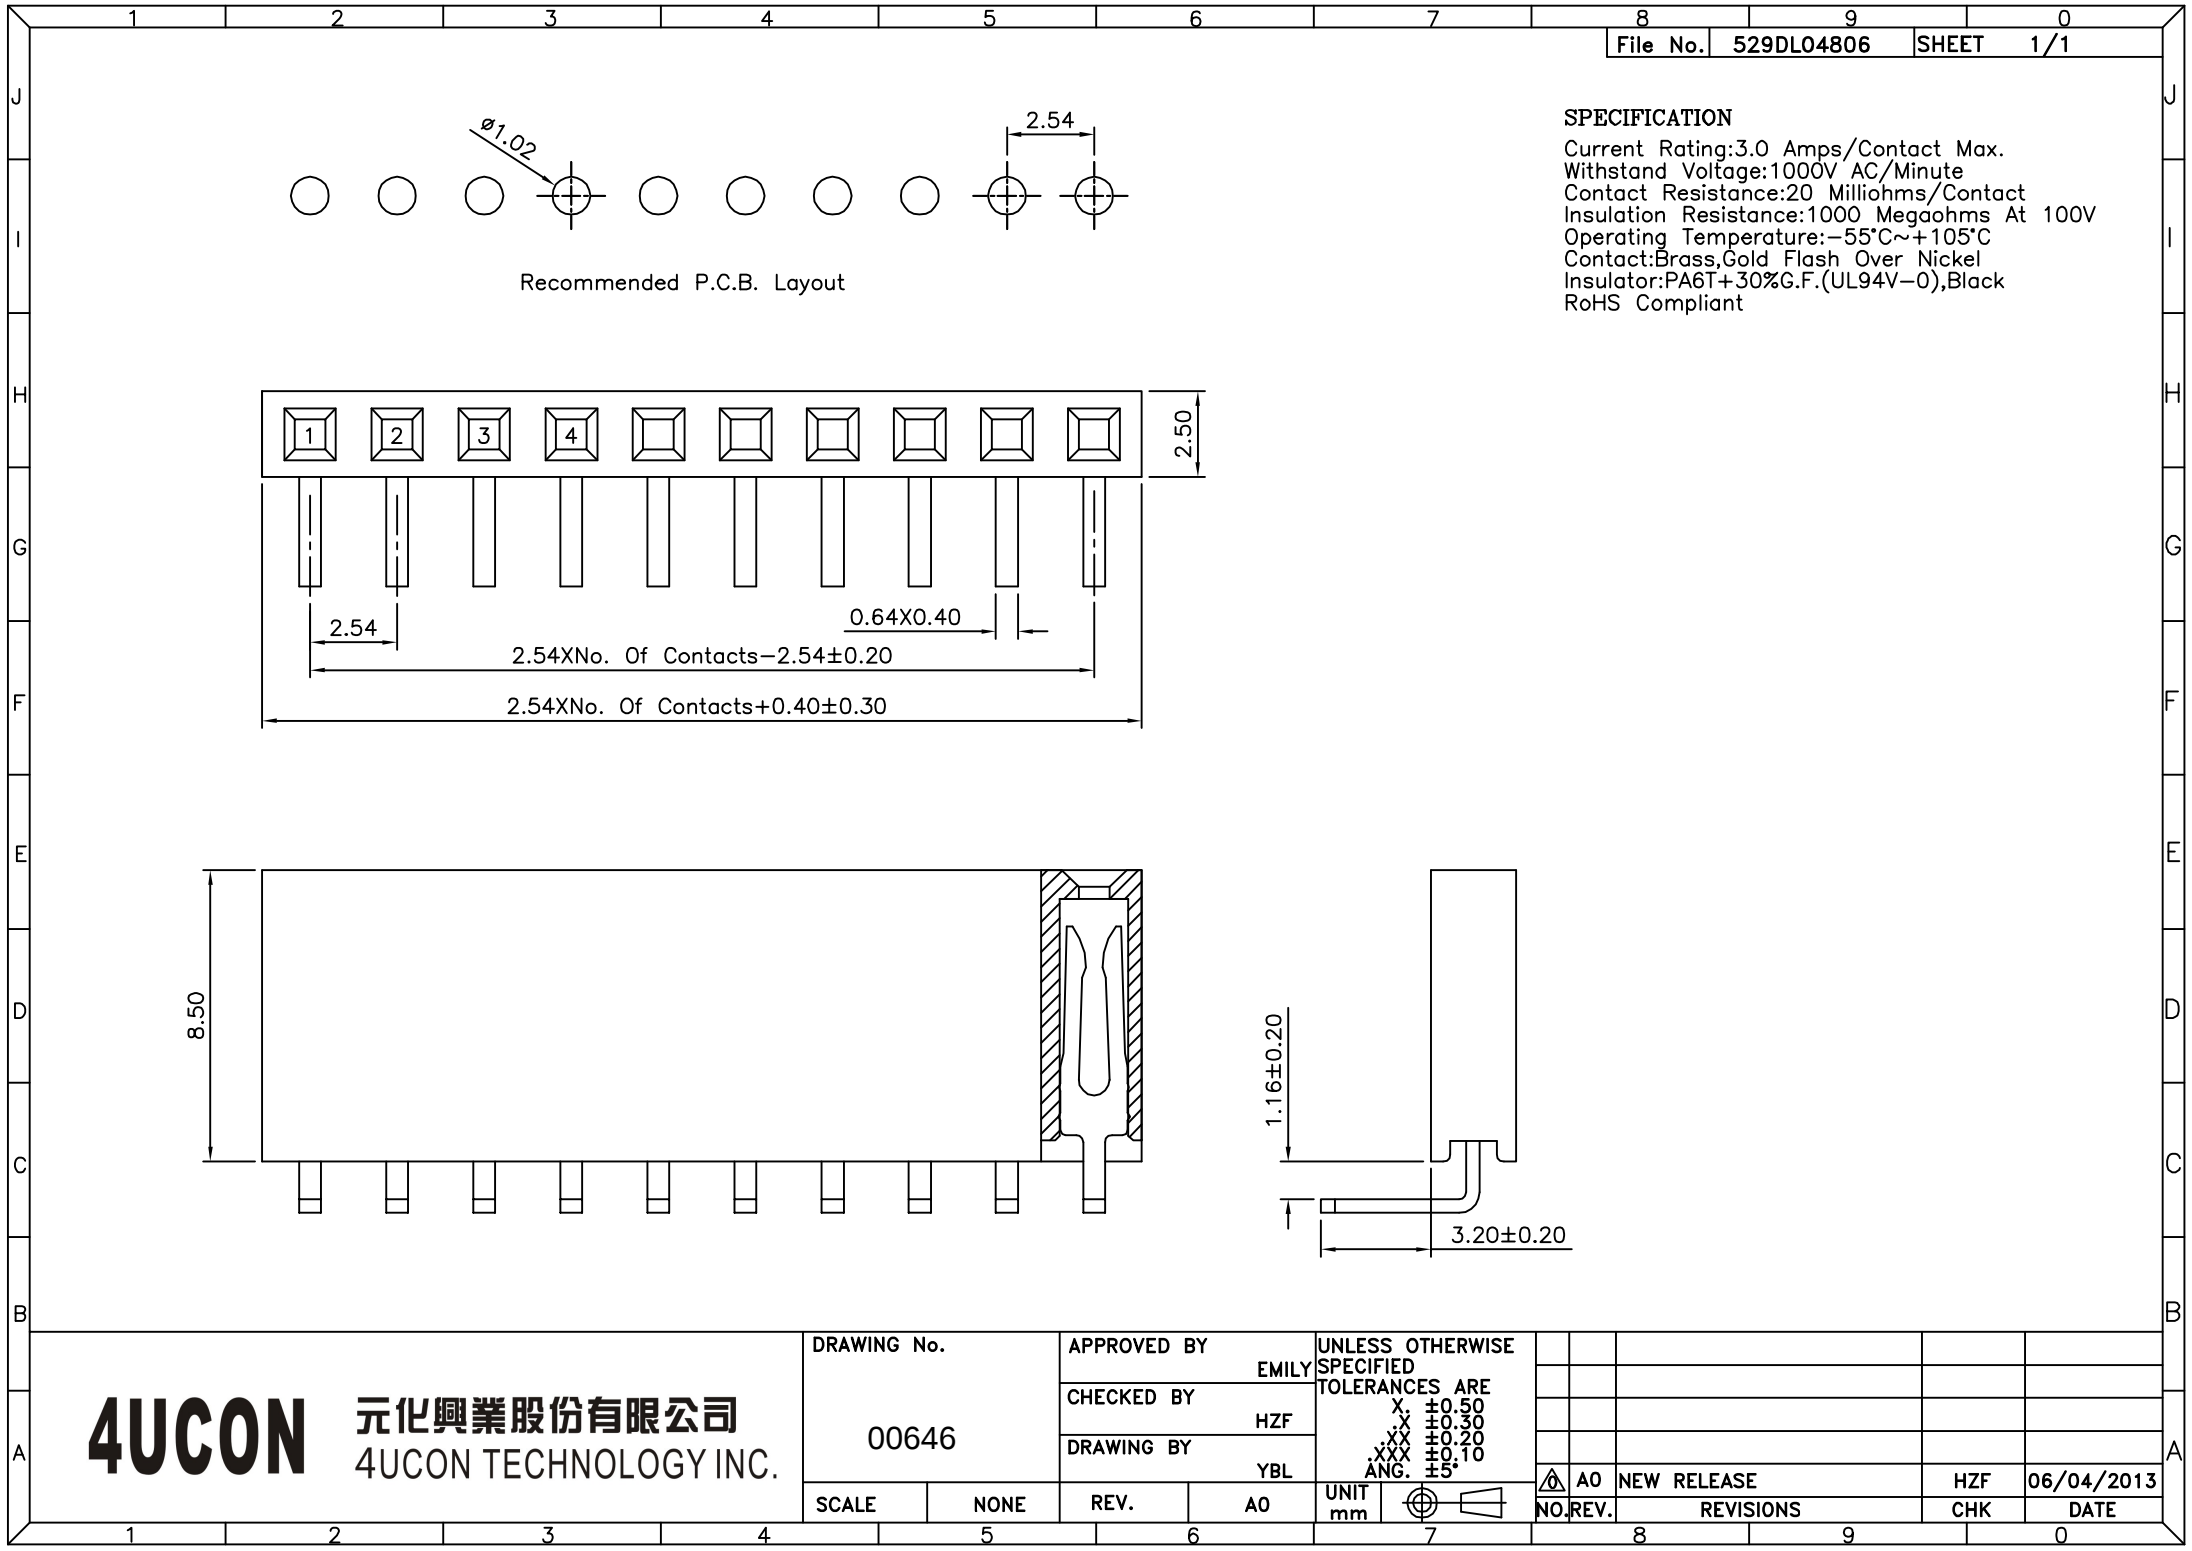

SPECIFICATION
Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms/Contact
Insulation Resistance:1000 Megaohms At 100V
Operating Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
00646		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE						
	X.	±0.50				
	XX	±0.30				
	XXX	±0.20				
	XXXX	±0.10				
	ANG.	±5°				
UNIT			A0	NEW RELEASE	HZF	06/04/2013
mm			NO. REV.	REVISIONS	CHK	DATE
						