
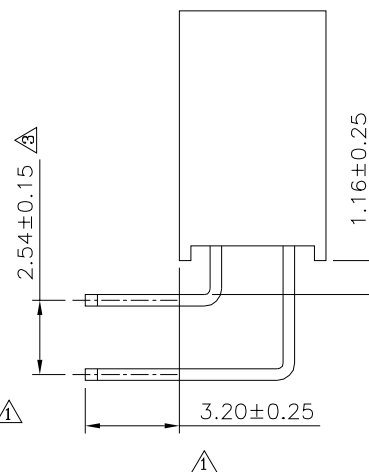
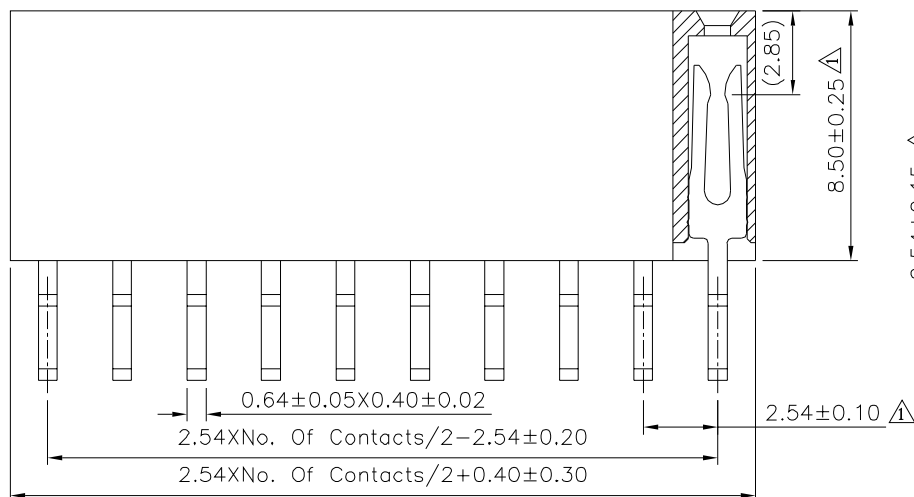


Recommended P.C.B. Layout

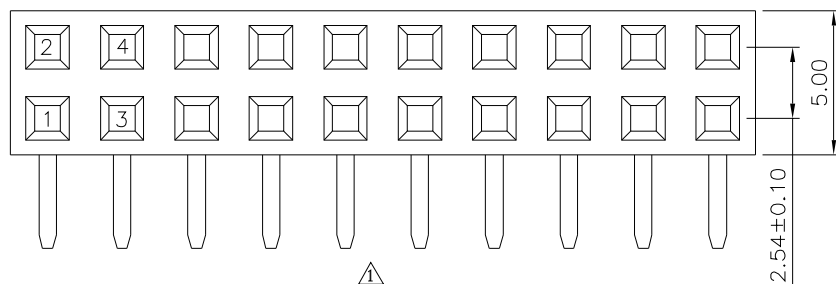

SPECIFICATION

- Current Rating: 3 Amps/Contact Max.
- Withstanding Voltage: 1000V AC/Minute
- Contact Resistance: 20 Milliohms Max./Contact
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: -40°C ~ +105°C
- Contact: Brass, Gold Plated Over Nickel
- Insulator: PA6T+30%G.F.(UL94V-0), Black
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00670

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.15
ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	12/09/2022
2	A2	Modify Data	HZF	09/08/2020
1	A1	Modify Data	HZF	02/17/2017
0	A0	NEW RELEASE	HZF	05/20/2013