
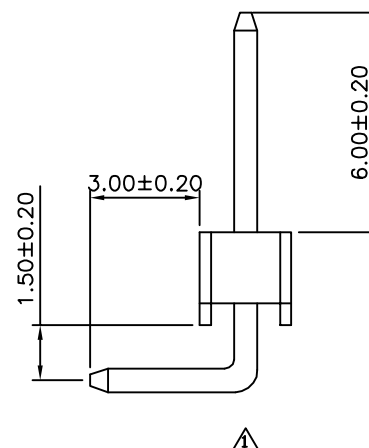
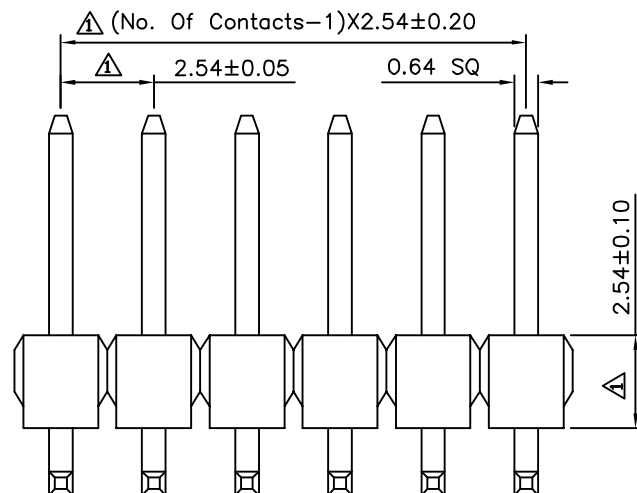
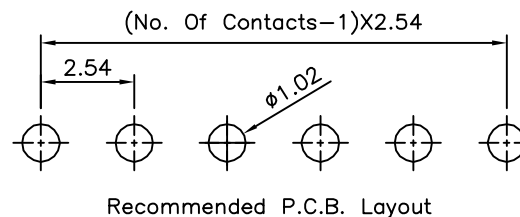


**△ SPECIFICATION**  
 Current: 3A  
 Operation Temperature: -55°C ~ +105°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1000V AC RMS  
 Housing: PBT(UL94V-0), Black  
 Contact: Copper Alloy, Gold Flash  
 RoHS Compliant

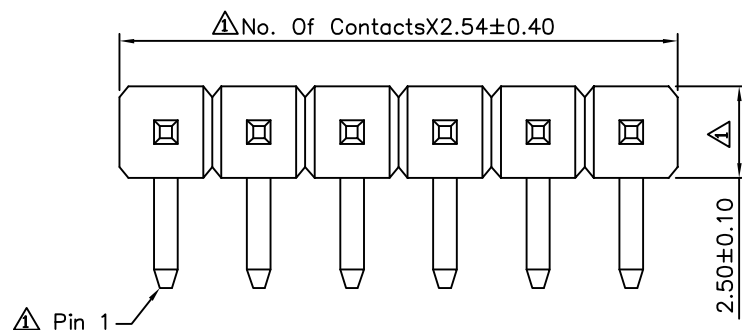

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

00883

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A1


UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. ± 5°

UNIT  
 mm



| NO.  | REV.        | REVISIONS | CHK        | DATE |
|------|-------------|-----------|------------|------|
| △ A1 | Modify Data | HZF       | 06/22/2010 |      |
| △ A0 | NEW RELEASE | SHIN      | 03/06/2006 |      |