
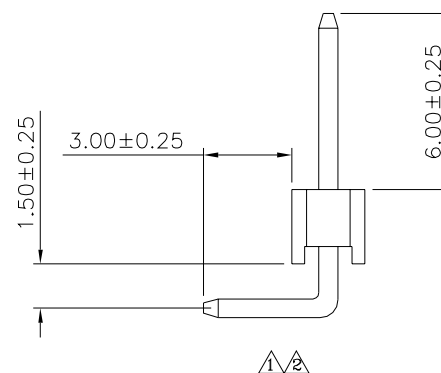
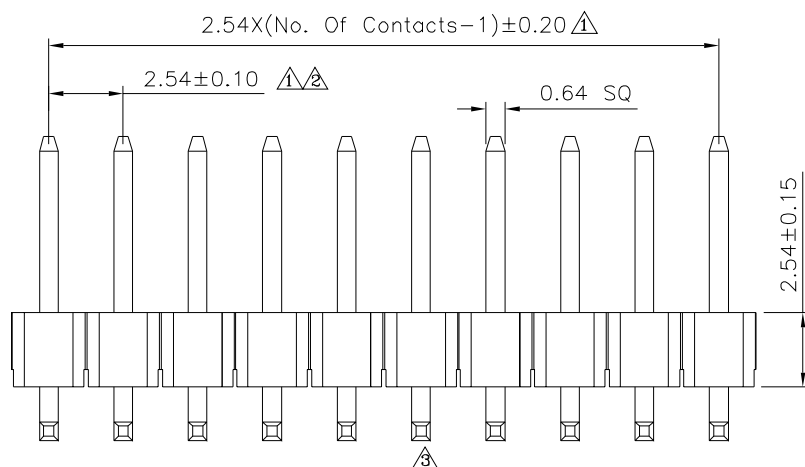


Recommended P.C.B. Layout

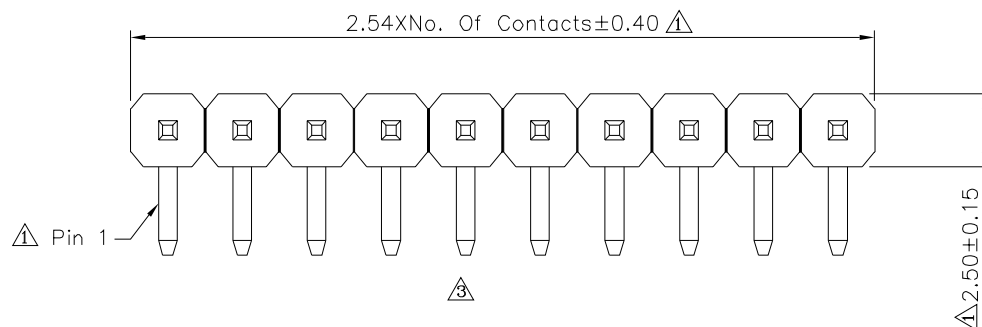

△ SPECIFICATION

- Current:3A
- △ Operation Temperature:−40°C~+105°C
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Withstanding Voltage:1000V AC RMS
- Housing:PBT(UL94V−0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:2~40 Contacts
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00889

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	10/28/2025
△2	A2	Modify Data	HZF	03/14/2014
△1	A1	Modify Data	HZF	06/22/2010
△0	A0	NEW RELEASE	SHIN	03/06/2006