
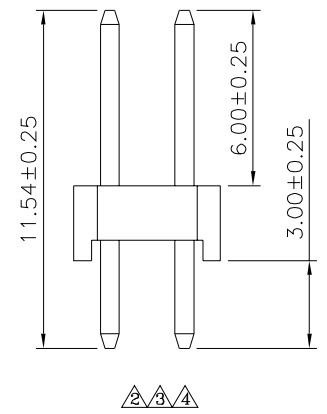
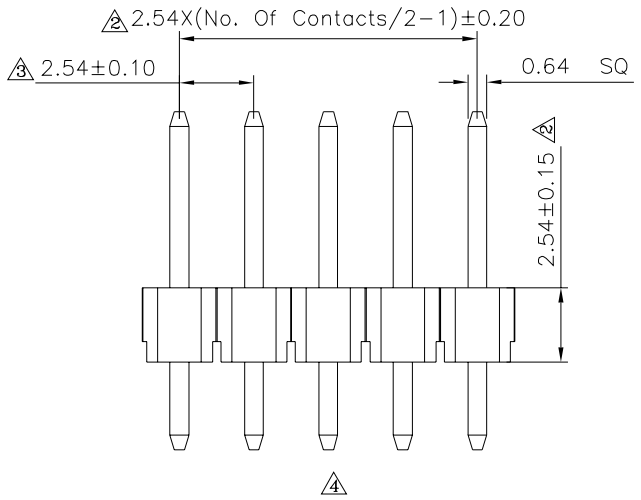


Recommended P.C.B. Layout

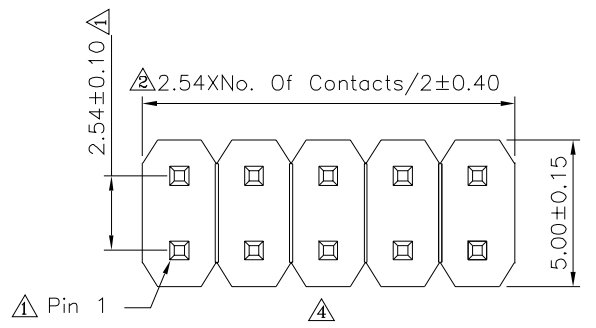

- △△ SPECIFICATION**
 Current:3A
 △ Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Pin
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | | | | | | |
|---------------|--|-------------|--|--|--|-----------|-------------|------|------------|
| DRAWING No. △ | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 .XXX ±0.05 | | △ A4 | Modify Data | HZF | 08/22/2019 |
| 00989 | | MEI | | | | △ A3 | Modify Data | HZF | 03/31/2014 |
| | | CHECKED BY | | | | △ A2 | Modify Data | HZF | 08/19/2010 |
| SCALE | | NONE | | DRAWING BY | | △ A1 | Modify Data | HZF | 04/22/2009 |
| | | REV. | | A4 | | △ A0 | NEW RELEASE | SHIN | 03/06/2006 |
| UNIT | | mm | | NO. REV. | | REVISIONS | | CHK | DATE |