
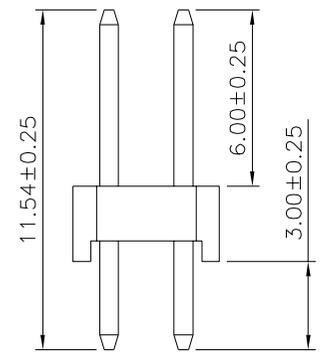
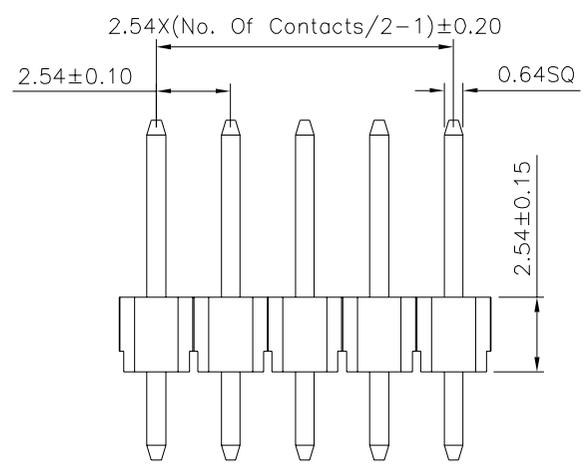


**SPECIFICATION**  
 Current:3A  
 Withstanding Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PBT(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~80 Pin  
 RoHS Compliant

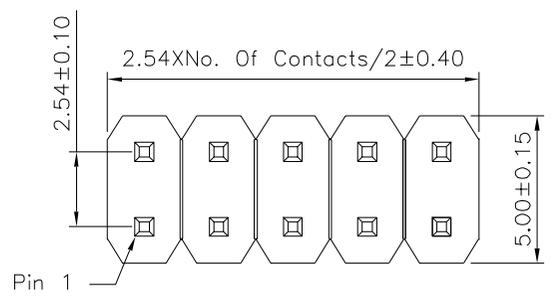

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |                |    |  |
|-------------|------|----------------|----|--|
| DRAWING No. |      | APPROVED BY    |    | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>.X ±0.38<br>.XX ±0.25<br>.XXX ±0.05 |
| 00993       |      | MEI            |    |  |
|             |      | CHECKED BY HZF |    |  |
| DRAWING BY  |      | CYP            |    |  |
| SCALE       | NONE | REV.           | B0 | UNIT mm  |

|     |      |             |     |            |
|-----|------|-------------|-----|------------|
| NO. | REV. | REVISIONS   | CHK | DATE       |
| △   | B0   | NEW RELEASE | HZF | 10/20/2025 |