
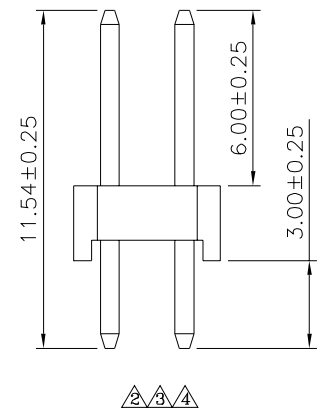
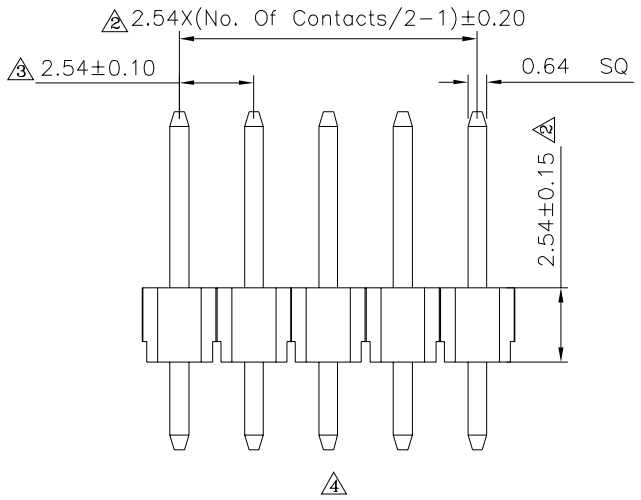


Recommended P.C.B. Layout

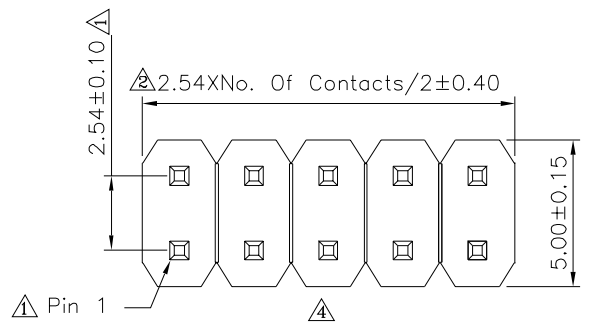

- △△ SPECIFICATION**
 Current:3A
 △ Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Pin
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 .XXX ±0.05	△ A4	Modify Data	HZF	08/22/2019	
01002		MEI			△ A3	Modify Data	HZF	03/31/2014	
		CHECKED BY			△ A2	Modify Data	HZF	08/19/2010	
SCALE		NONE		DRAWING BY		△ A1	Modify Data	HZF	04/22/2009
		REV.		A4		△ A0	NEW RELEASE	SHIN	03/06/2006
UNIT		mm		NO. REV.		REVISIONS		CHK	DATE