


File No.	182PK05217	SHEET	1/1

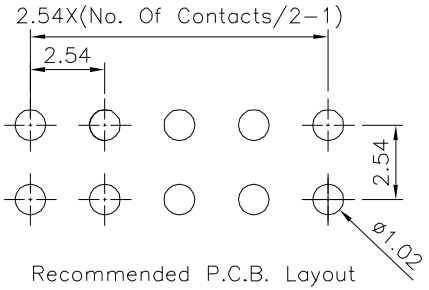


Recommended P.C.B. Layout

SPECIFICATION
Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~80 Pin
RoHS Compliant

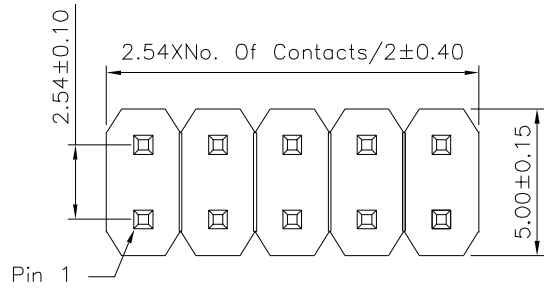

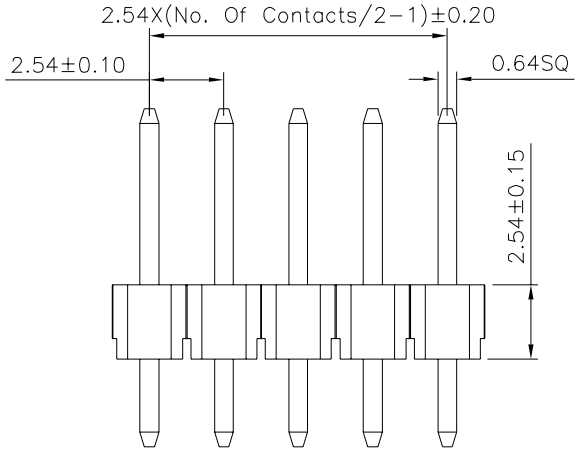



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01002	MEI	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY CYP	.XXX ±0.05
SCALE NONE	REV. B0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△0	B0	NEW RELEASE	HZF	10/20/2025