
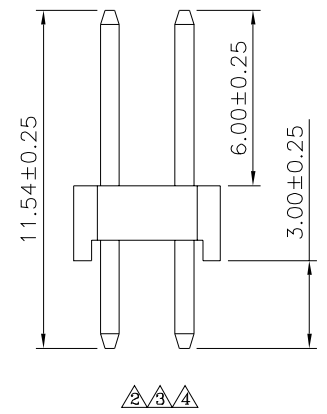
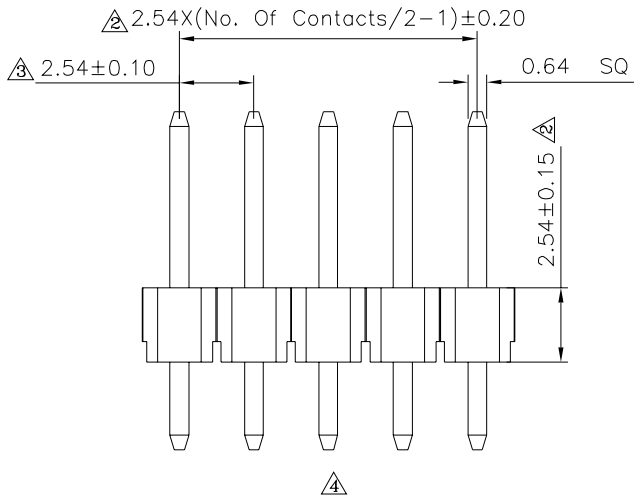


Recommended P.C.B. Layout

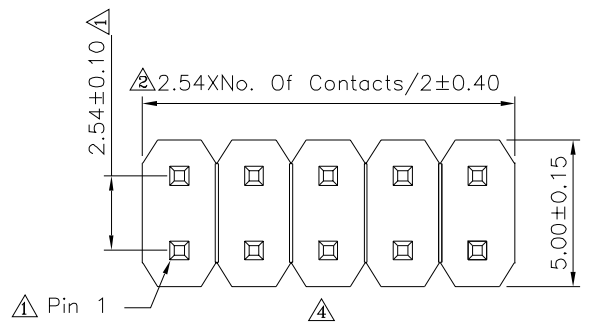

- △△ SPECIFICATION**  
 Current:3A  
 △ Withstanding Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Housing:PBT(UL94V-0),Black  
 △ Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~80 Pin  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 .XXX ±0.05		△ A4	Modify Data	HZF	08/22/2019
01004		CHECKED BY HZF				△ A3	Modify Data	HZF	03/31/2014
		DRAWING BY CYP				△ A2	Modify Data	HZF	08/19/2010
SCALE	NONE	REV.	A4	UNIT mm	△ A1	Modify Data	HZF	04/22/2009	
				UNIT mm	△ A0	NEW RELEASE	SHIN	03/06/2006	
				UNIT mm	NO.REV.	REVISIONS	CHK	DATE	