
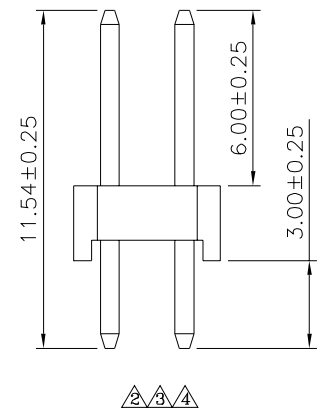
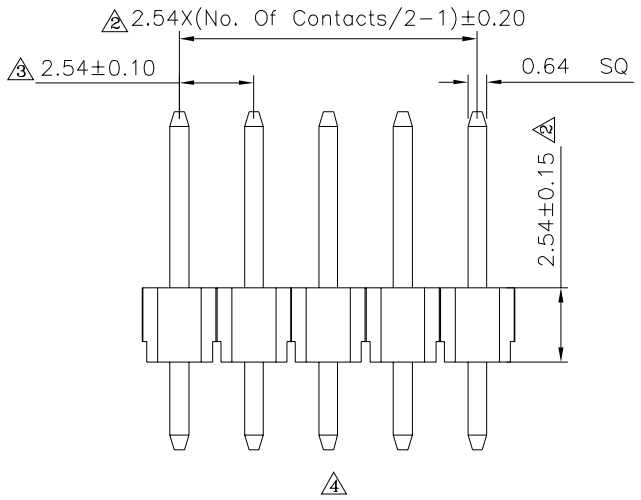


Recommended P.C.B. Layout

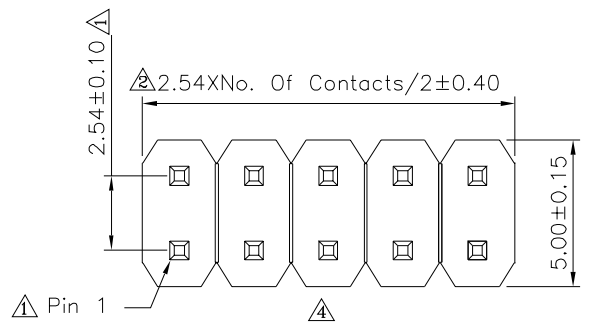

△△ SPECIFICATION

- Current:3A
- △ Withstanding Voltage:1000V AC/Minute
- △ Contact Resistance:20 Milliohms Max.
- △ Insulation Resistance:1000 Megaohms Min.
- △ Operation Temperature:-55°C~+105°C
- △ Housing:PBT(UL94V-0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:04~80 Pin
- RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. △  
**01007**  
SCALE NONE

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY CYP  
REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
△ .X ±0.38  
△ .XX ±0.25  
△ .XXX ±0.05  
UNIT mm

△ A4	Modify Data	HZF	08/22/2019
△ A3	Modify Data	HZF	03/31/2014
△ A2	Modify Data	HZF	08/19/2010
△ A1	Modify Data	HZF	04/22/2009
△ A0	NEW RELEASE	SHIN	03/06/2006
NO. REV.	REVISIONS	CHK	DATE