

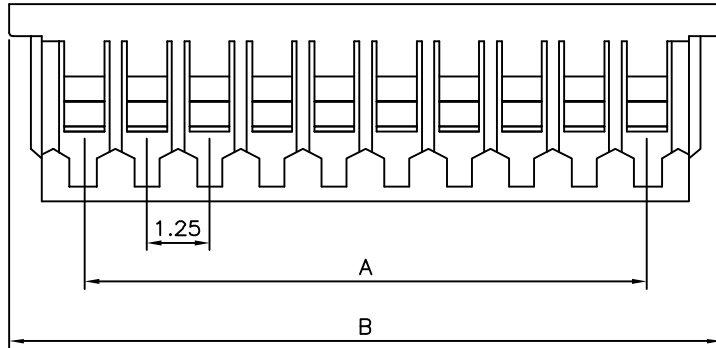


SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:125V AC Max.
 Dielectric Withstanding Voltage:250V AC/Minute
 Insulation Resistance:100 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temp:-20°C~+85°C
 Material:PA66(UL94V-0)
 RoHS Compliant

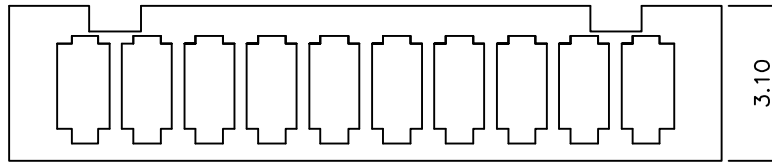

| Contacts | A | B |
|----------|-------|-------|
| 2 | 1.25 | 4.25 |
| 3 | 2.50 | 5.50 |
| 4 | 3.75 | 6.75 |
| 5 | 5.00 | 8.00 |
| 6 | 6.25 | 9.25 |
| 7 | 7.50 | 10.50 |
| 8 | 8.75 | 11.75 |
| 9 | 10.00 | 13.00 |
| 10 | 11.25 | 14.25 |
| 11 | 12.50 | 15.50 |
| 12 | 13.75 | 16.75 |
| 13 | 15.00 | 18.00 |
| 14 | 16.25 | 19.25 |
| 15 | 17.50 | 20.50 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 01186

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.15

SCALE NONE

REV. B1

UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-----|------------|
| △ | B1 | Modify Data | HZF | 07/08/2015 |
| △ | B0 | NEW RELEASE | HZF | 12/10/2009 |