


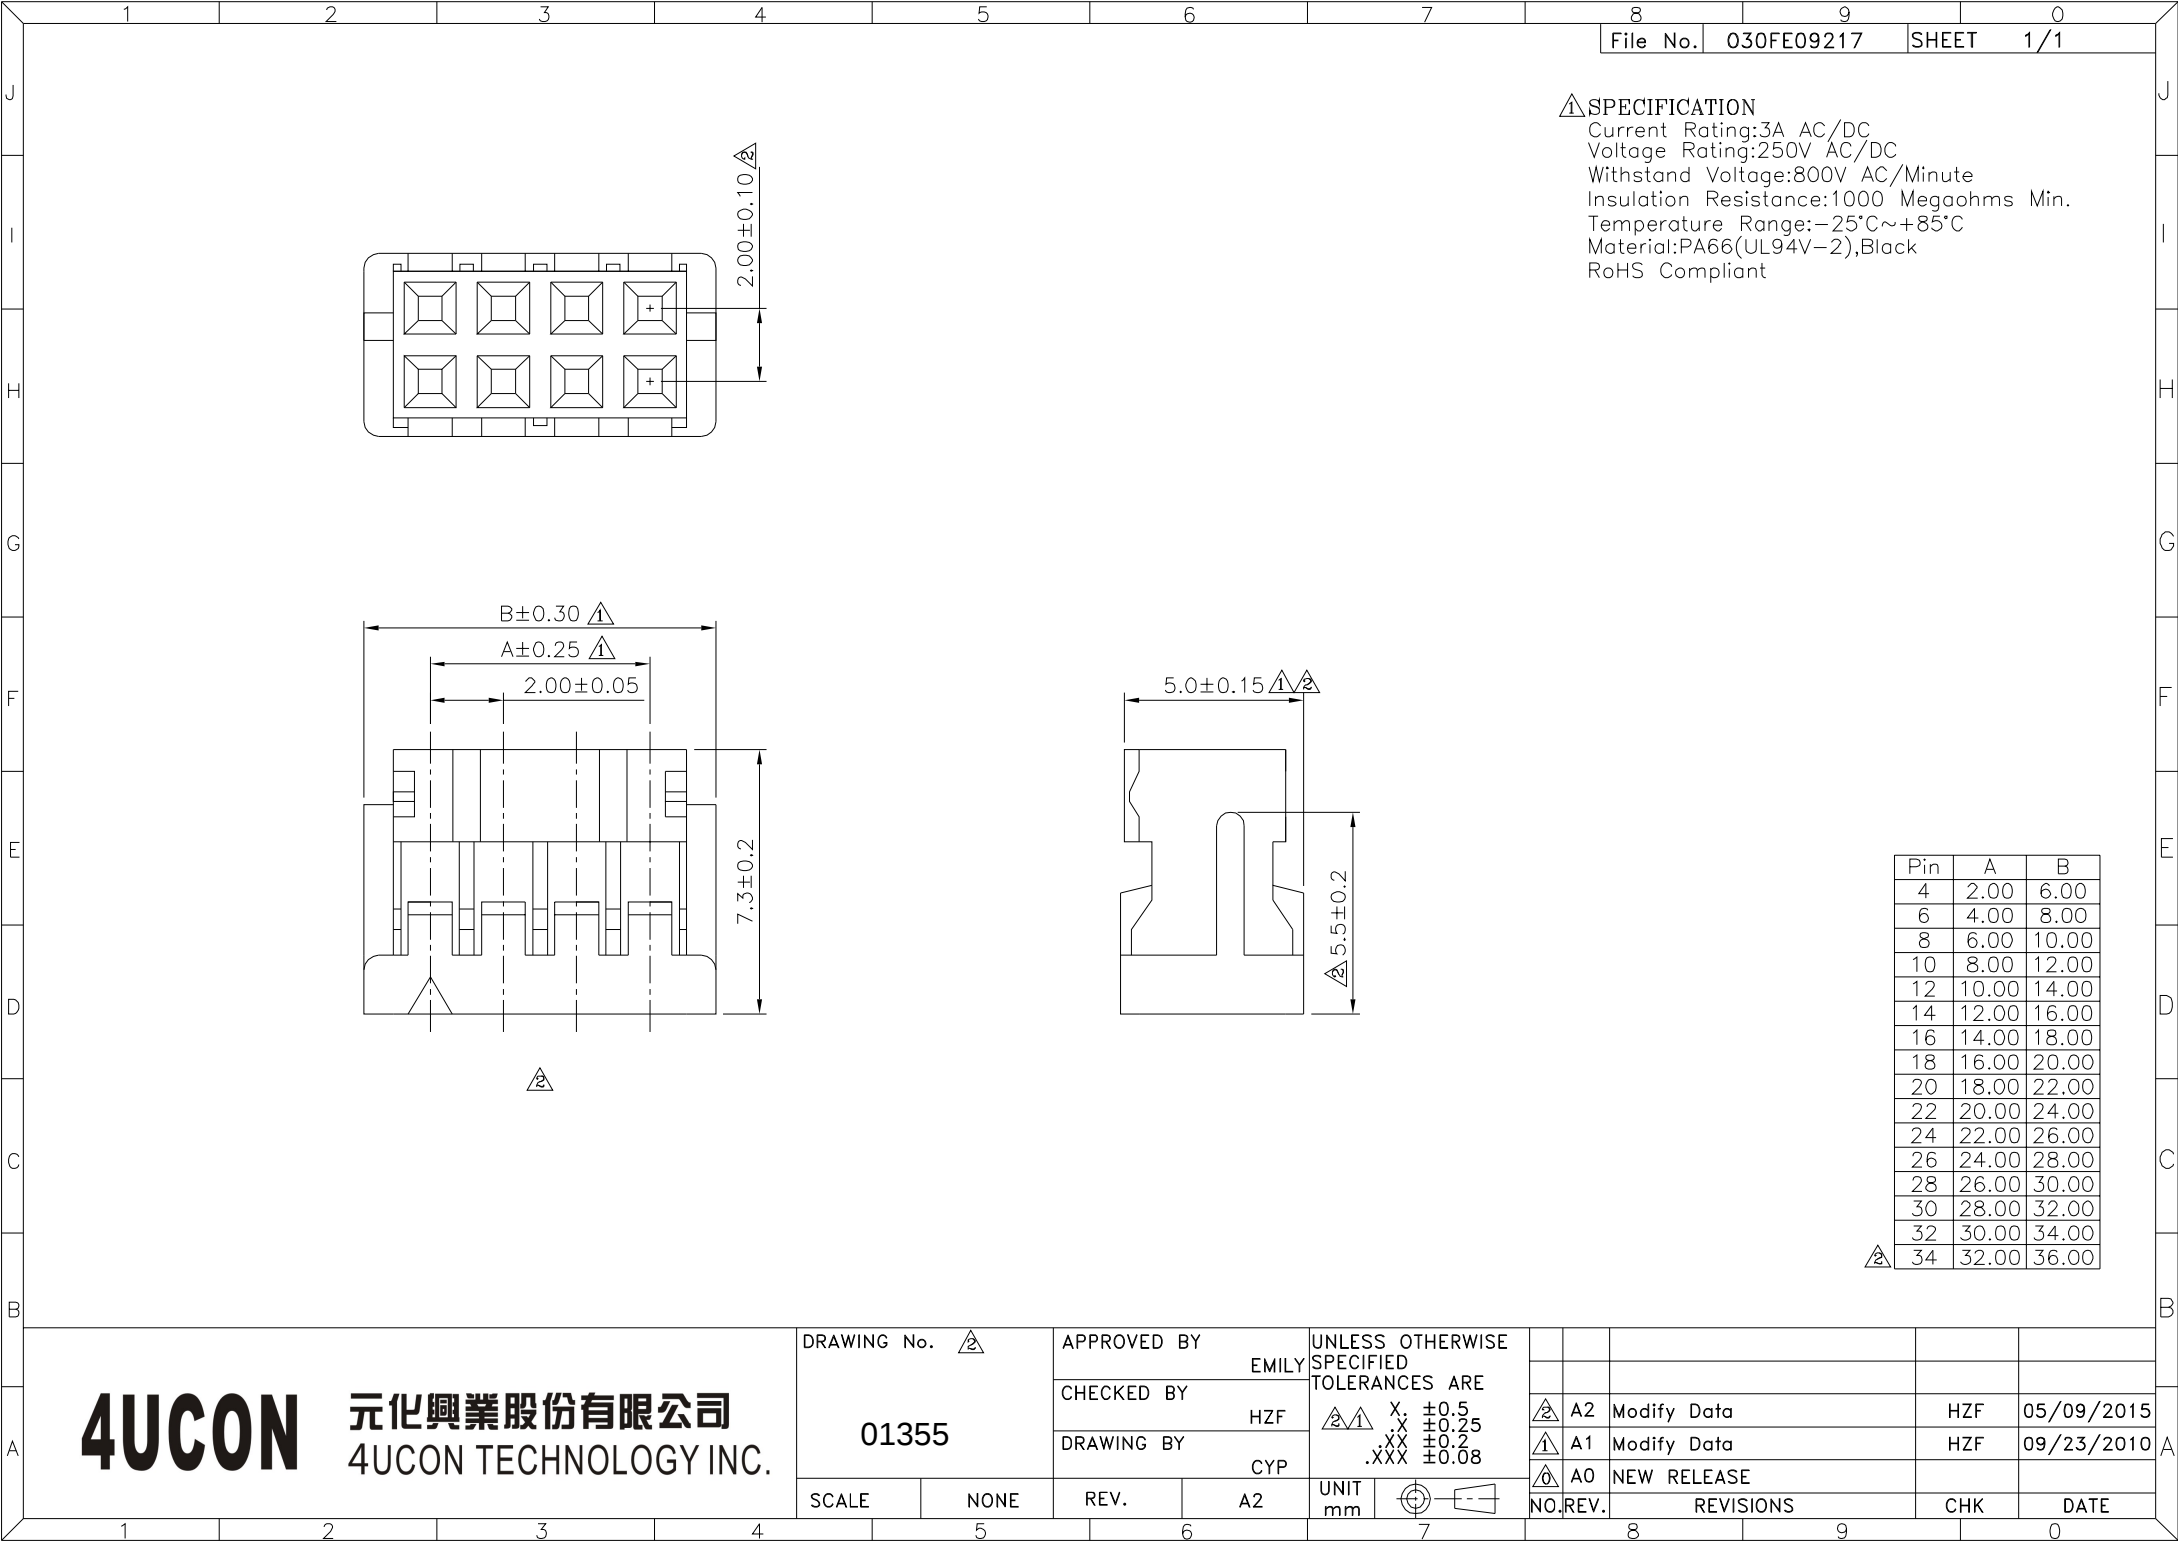

△ SPECIFICATION
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Material:PA66(UL94V-2),Black
RoHS Compliant

Pin	A	B
4	2.00	6.00
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. **01355**

APPROVED BY
EMILY

CHECKED BY
HZF

DRAWING BY
CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

$\text{X}_1 \pm 0.5$
 $\text{XX} \pm 0.25$
 $\text{XXX} \pm 0.08$

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	05/09/2015
△1	A1	Modify Data	HZF	09/23/2010
△0	A0	NEW RELEASE		