
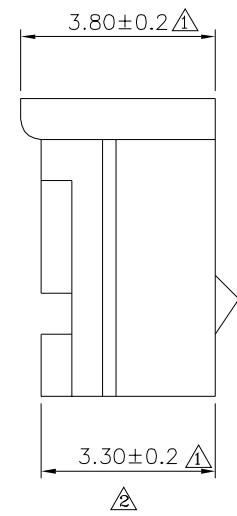
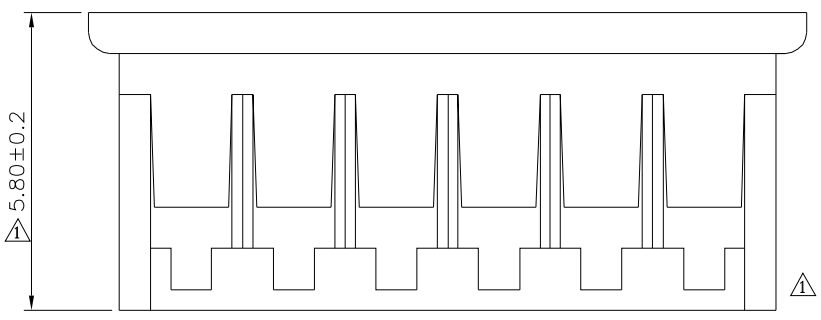


△ SPECIFICATION
 Current Rating:1A AC,DC
 Voltage Rating:250V AC,DC
 Material:PA66(UL94V-0)
 RoHS Compliant

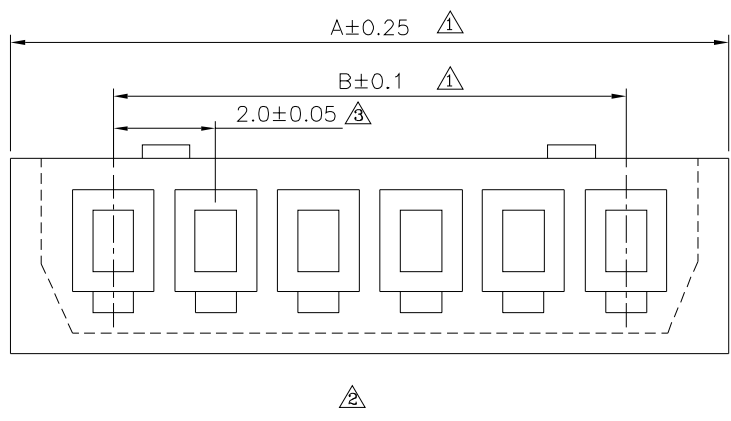

| △ Pin | A | B |
|-------|------|------|
| 02 | 6.0 | 2.0 |
| 03 | 8.0 | 4.0 |
| 04 | 10.0 | 6.0 |
| 05 | 12.0 | 8.0 |
| 06 | 14.0 | 10.0 |
| 07 | 16.0 | 12.0 |
| 08 | 18.0 | 14.0 |
| 09 | 20.0 | 16.0 |
| 10 | 22.0 | 18.0 |
| 11 | 24.0 | 20.0 |
| 12 | 26.0 | 22.0 |
| 13 | 28.0 | 24.0 |
| 14 | 30.0 | 26.0 |
| 15 | 32.0 | 28.0 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|-----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ 1~10 ±0.2 △ 10~20 ±0.3 △ 20~40 ±0.4 △ 40~ ±0.5 |
| 01439 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | WSS | |
| SCALE | NONE | REV. | A3 | UNIT mm |

| | | | |
|----------|-------------|-----|------------|
| △ A3 | Modify Data | HZF | 02/06/2017 |
| △ A2 | Modify Data | HZF | 10/24/2011 |
| △ A1 | Modify Data | HZF | 08/04/2009 |
| △ A0 | NEW RELEASE | | |
| NO. REV. | REVISIONS | CHK | DATE |