
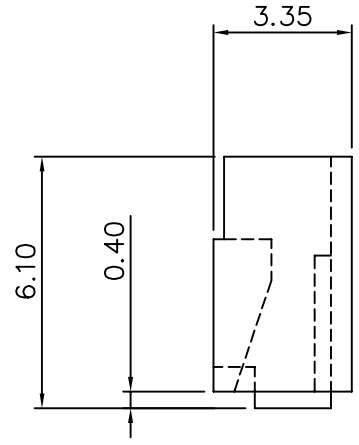
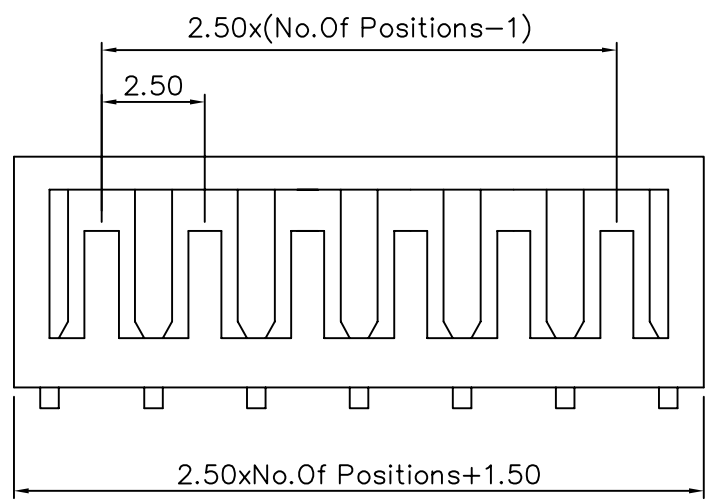


SPECIFICATIONS

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 1000V AC/Minute
 Contact Resistance: Initial Value/10mΩ Max.
 After Environmental Testing/30mΩ Max.
 Insulation Resistance:500M Ω Min.
 Temperature Range: -25°C To +85°C
 (Including Temperature Rise)
 Applicable Wire : AWG #24~#28
 Material : Nylon 66, UL94V-0

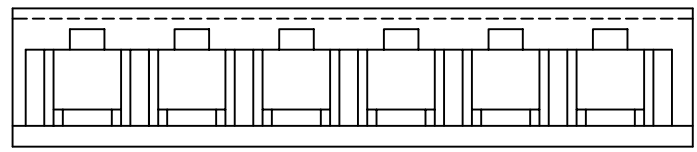

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 01721

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------