
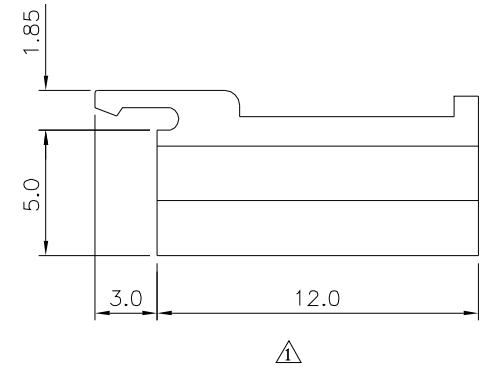


△ SPECIFICATION

Current Rating:3A AC/DC  
 Voltage Raing:250V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),White  
 RoHS Compliant

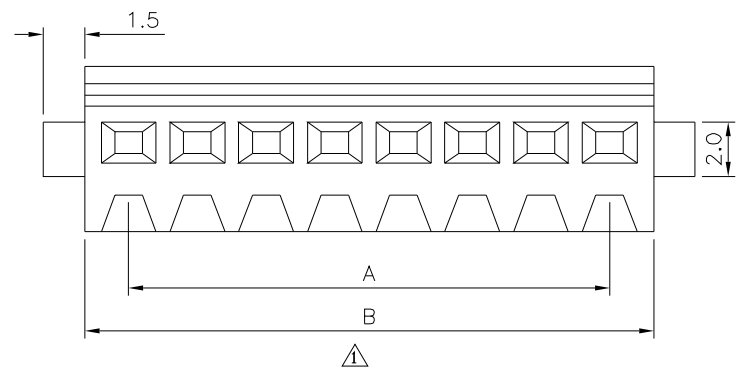

△ Pin	A	B
02	2.5	5.8
03	5.0	8.3
04	7.5	10.9
05	10.0	13.4
06	12.5	15.8
07	15.0	18.4
08	17.5	20.8
09	20.0	23.4
10	22.5	25.8
11	25.0	28.4
12	27.5	31.0
13	30.0	33.4
14	32.5	35.9
15	35.0	38.5
16	37.5	41.0
17	40.0	43.4
18	42.5	46.0
19	45.0	48.5
20	47.5	51.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 01800

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.3  
 △ .XX ±0.3

SCALE NONE REV. A1 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	02/09/2017
△ A0		NEW RELEASE		