
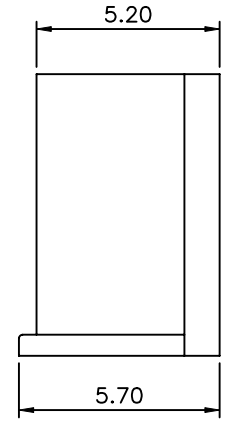
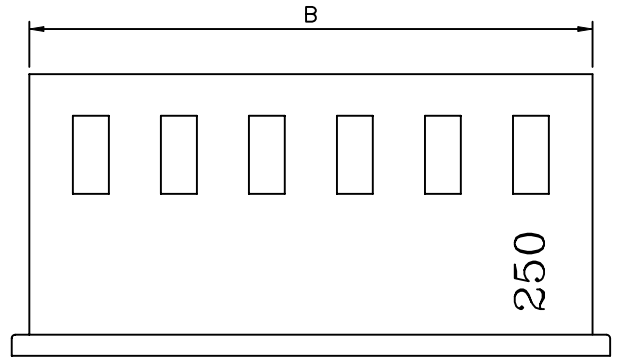


SPECIFICATIONS

Current Rating:2A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25°C~+85°C
 Contact Resistance:20 Milliohms Max
 Insulation Resistance:1000 Megaohms Min
 Withstanding Voltage:800V AC/Minute
 Material:Nylon66,UL94V-2
 RoHS Compliant

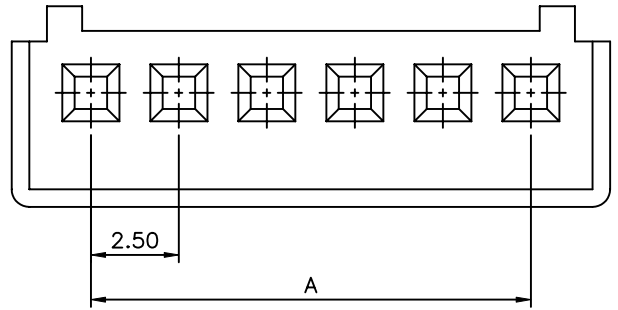

Pin	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
16	37.50	41.00
17	40.00	43.50
18	42.50	46.00
19	45.00	48.50
20	47.50	51.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 01842

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 LXX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.3
 .XX ±0.2

SCALE NONE

REV. A0

UNIT mm

NO. REV. A0 NEW RELEASE HZF 06/18/2008
 REVISIONS CHK DATE