




SPECIFICATION

Current Rating:2.5A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:800V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PBT(UL94V-0),Black
RoHS Compliant



Latch And Polarization RIB Location

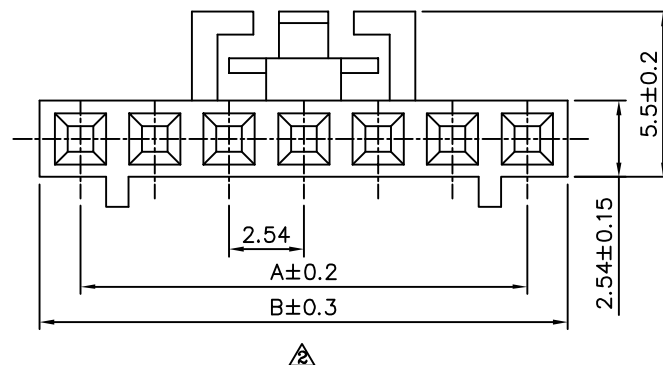

2 Circuit



3 Circuit

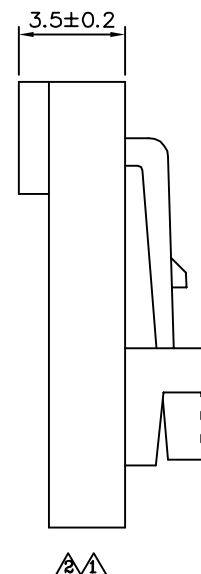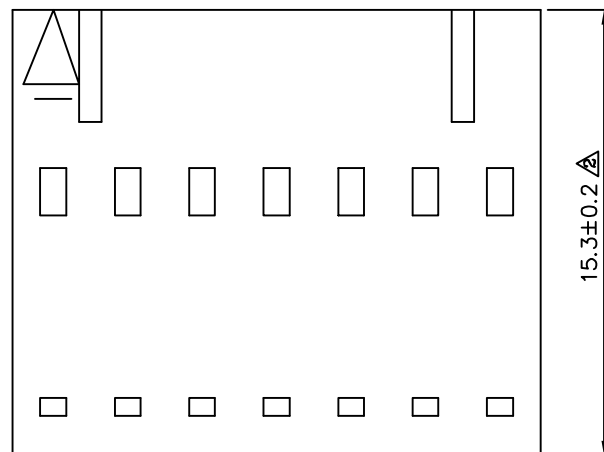

$\Delta \Delta \Delta$	Circuits	A	B
	02	2.54	5.35
	03	5.08	7.89
	04	7.62	10.4
	05	10.16	12.9
	06	12.70	15.5
	07	15.24	18.0
	08	17.78	20.5
	09	20.32	23.1
	10	22.86	25.6
	11	25.40	28.2
	12	27.94	30.7
	13	30.48	33.2
	14	33.02	35.8
	15	35.54	38.3
	16	38.10	40.9
	17	40.64	43.4
	18	43.18	45.9

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

01999

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle_2$	X.	± 0.5
	.X	± 0.25
	.XX	± 0.2
	.XXX	± 0.08

	UNIT mm
--	------------



2	
---	--

2	
1	

1	
A	

[illegible]

2	Modify Data
---	-------------

	modify, data
1	Modify Data

1	Modality Data
2	

0	NEW RELEASE
---	-------------

HZF	09/23/2016
-----	------------

H2F	03/03/2010
H3F	03/03/2010

HZF	03/03/2010
-----	------------

BECKY	06/07/2006
-------	------------

NO.	REV.
-----	------

REVISIONS

	CHI
--	-----

	DATE
--	------