




**△△ SPECIFICATION**  
 Current Rating: 5A AC/DC  
 Voltage Rating: 250V AC Max.  
 Operating Temperature: -25°C~+85°C  
 Insulation Resistance: 1000 Megaohms Min.  
 Insulator: PA66(UL94V-0)  
 RoHS Compliant

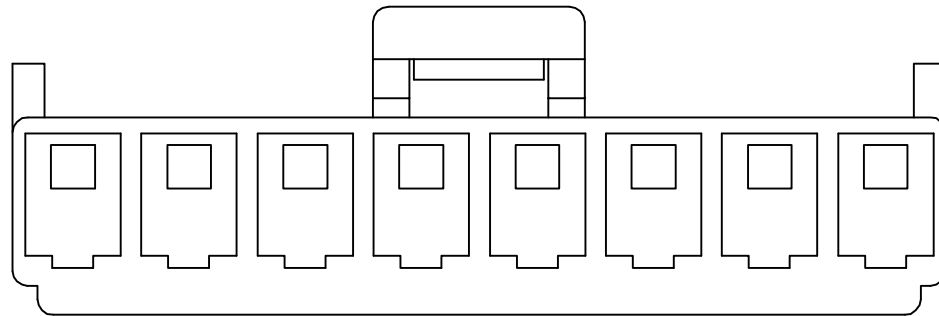

△

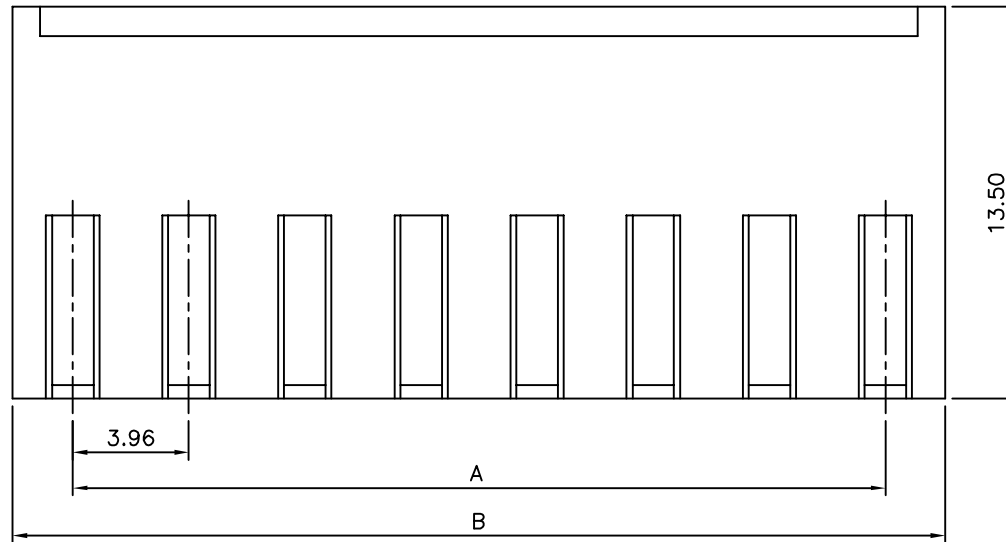

△

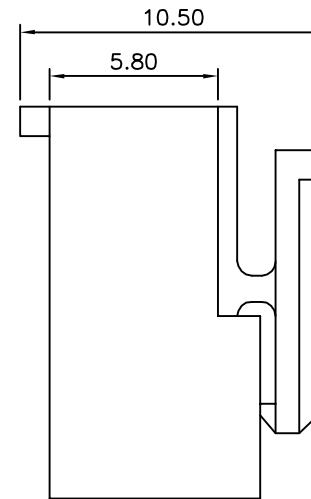

△

△

Pin	A	B
02	3.96	8.04
03	7.92	12.10
04	11.88	15.96
05	15.84	20.00
06	19.80	23.90
07	23.76	27.90
08	27.72	31.86
09	31.68	35.88
10	35.64	39.84
11	39.60	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

02188

APPROVED BY  
 EMILY

CHECKED BY  
 HZF

DRAWING BY  
 GAO

SCALE NONE

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.5  
 △.XX ±0.25  
 ANG.

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	12/04/2012
△A1		Modify Data	HZF	12/28/2011
△A0		NEW RELEASE	RAN	