




△△ SPECIFICATION
 Current Rating: 5A AC/DC
 Voltage Rating: 250V AC Max.
 Operating Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Insulator: PA66(UL94V-0)
 RoHS Compliant

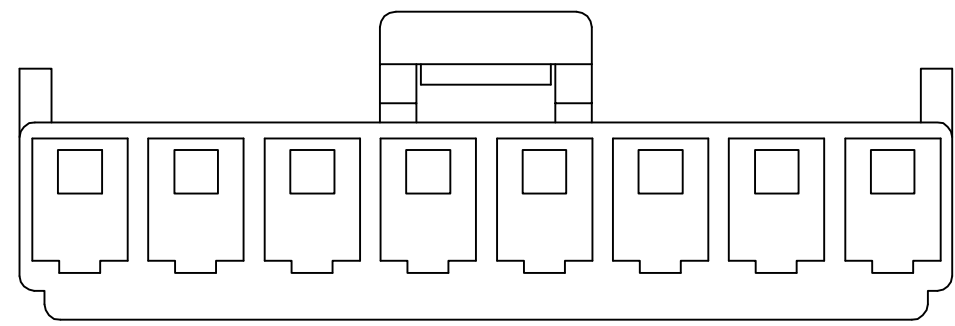

△

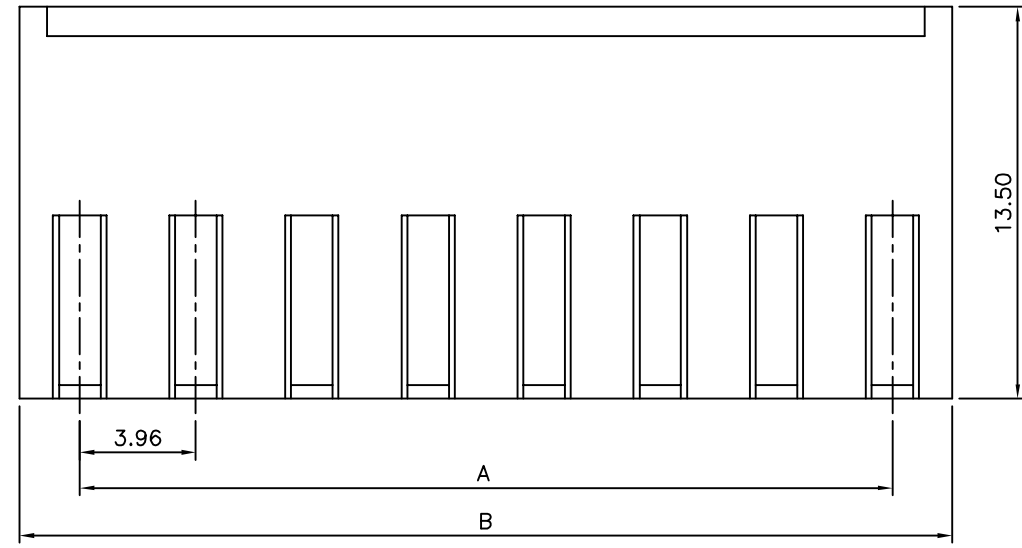

△

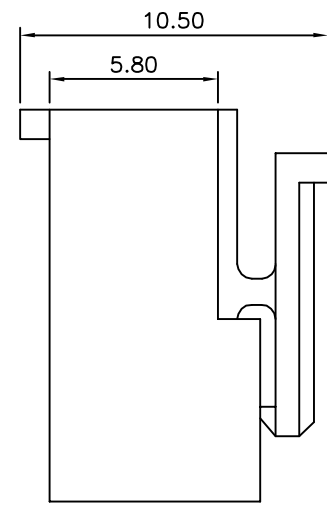

△

| Pin | A | B |
|-----|-------|-------|
| 02 | 3.96 | 8.04 |
| 03 | 7.92 | 12.10 |
| 04 | 11.88 | 15.96 |
| 05 | 15.84 | 20.00 |
| 06 | 19.80 | 23.90 |
| 07 | 23.76 | 27.90 |
| 08 | 27.72 | 31.86 |
| 09 | 31.68 | 35.88 |
| 10 | 35.64 | 39.84 |
| 11 | 39.60 | 43.74 |
| 12 | 43.56 | 47.74 |
| 13 | 47.52 | 51.70 |
| 14 | 51.48 | 55.66 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 02189
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY GAO
 SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.5
 .XX ±0.25
 ANG.
 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-----|------------|
| △A2 | | Modify Data | HZF | 12/04/2012 |
| △A1 | | Modify Data | HZF | 12/28/2011 |
| △A0 | | NEW RELEASE | RAN | |