




△△ SPECIFICATION
 Current Rating: 5A AC/DC
 Voltage Rating: 250V AC Max.
 Operating Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Insulator: PA66(UL94V-0)
 RoHS Compliant

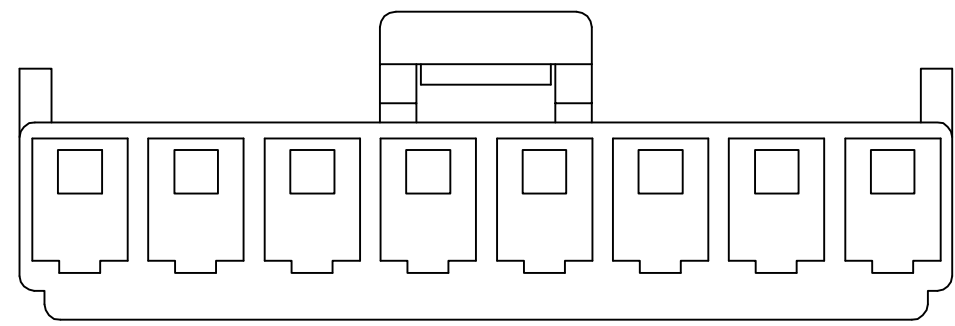

△

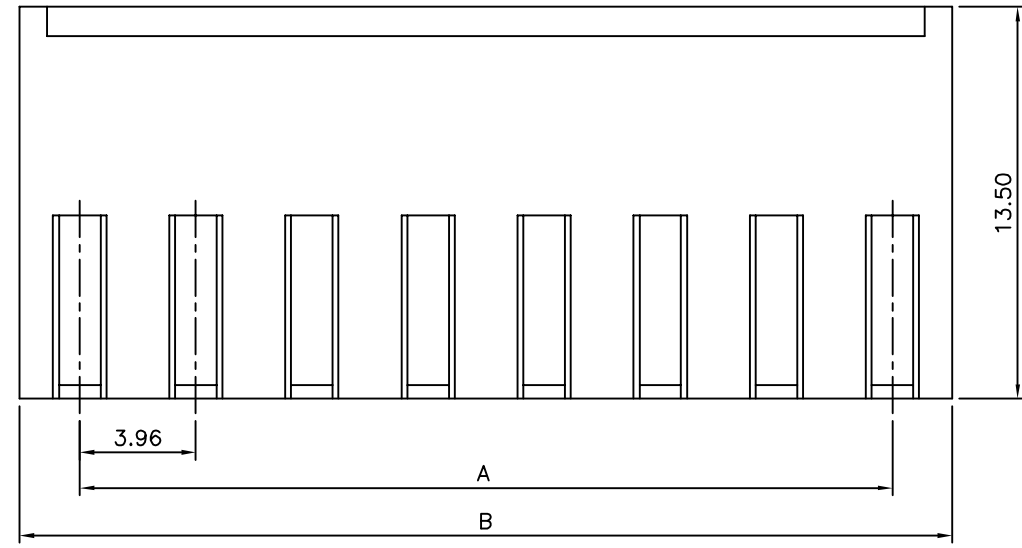

△

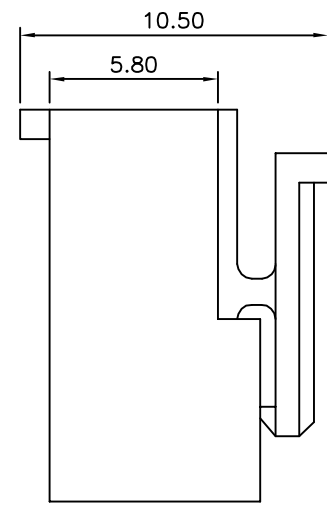

△

△

Pin	A	B
02	3.96	8.04
03	7.92	12.10
04	11.88	15.96
05	15.84	20.00
06	19.80	23.90
07	23.76	27.90
08	27.72	31.86
09	31.68	35.88
10	35.64	39.84
11	39.60	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.5 .XX ±0.25 ANG.
02190		EMILY		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY GAO		UNIT mm
REV.	A2	NO. REV.		REVISIONS

△ A2	Modify Data	HZF	12/04/2012
△ A1	Modify Data	HZF	12/28/2011
△ A0	NEW RELEASE	RAN	
NO. REV.	REVISIONS	CHK	DATE