




**△ SPECIFICATION**  
 Current Rating:12A AC/DC  
 Voltage Rating:300V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-2)  
 RoHS Compliant

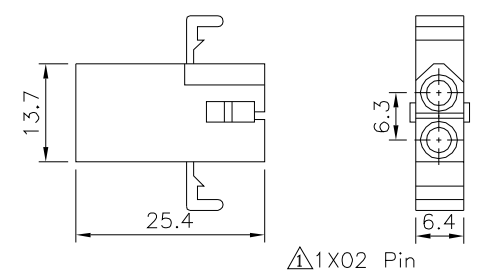


△ 1X02 Pin

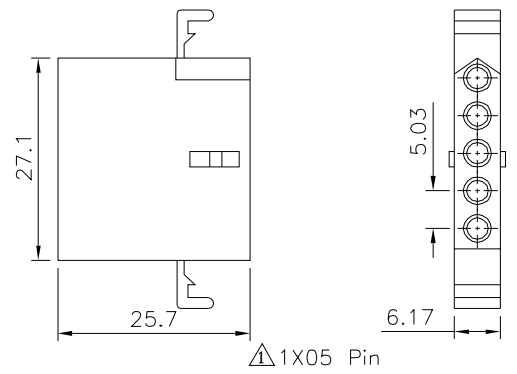


△ 1X05 Pin

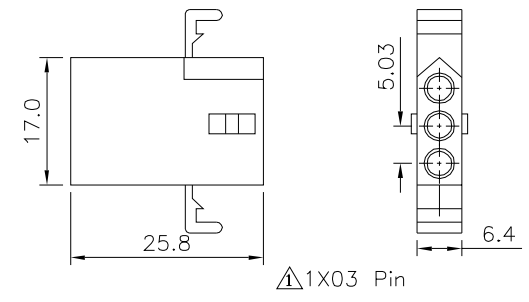


△ 1X03 Pin

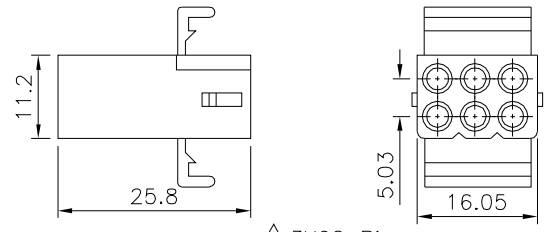


△ 3X02 Pin

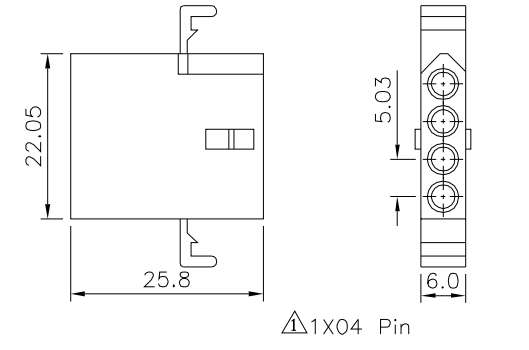


△ 1X04 Pin

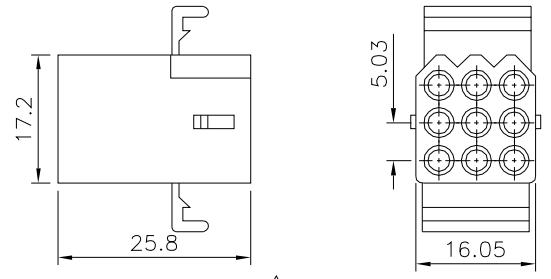


△ 3X03 Pin

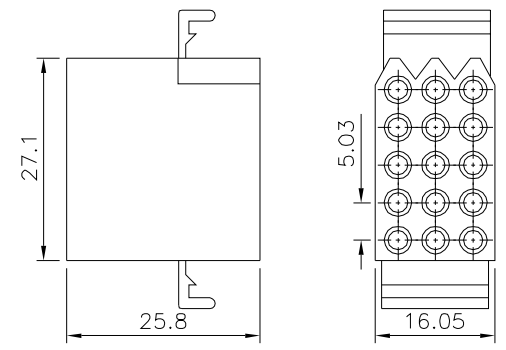

△ 3X05 Pin

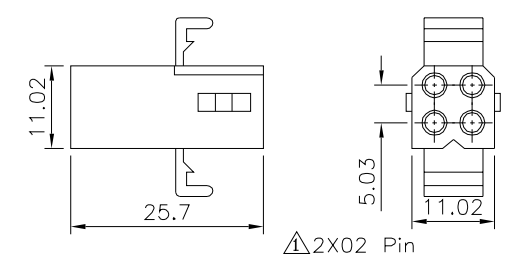

△ 2X02 Pin

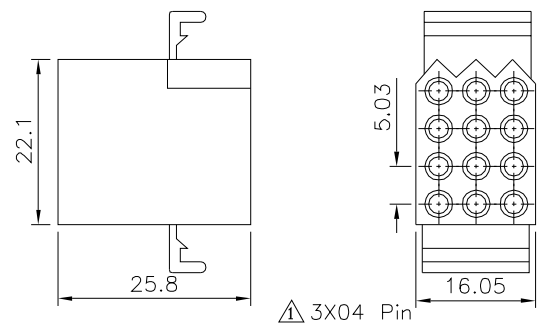

△ 3X04 Pin

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |     |  |
|-------------|------|-------------|-----|--|
| DRAWING No. |      | APPROVED BY |     | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>△ .X ±0.3<br>.XX ±0.3<br>ANG. |
| 02381       |      | MEI         |     |  |
|             |      | CHECKED BY  | HZF |  |
|             |      | DRAWING BY  | YBL |  |
| SCALE       | NONE | REV.        | A1  | UNIT mm  |

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A1 |      | Modify Data | HZF | 12/09/2013 |
| △ A0 |      | NEW RELEASE | HZF | 05/08/2013 |