


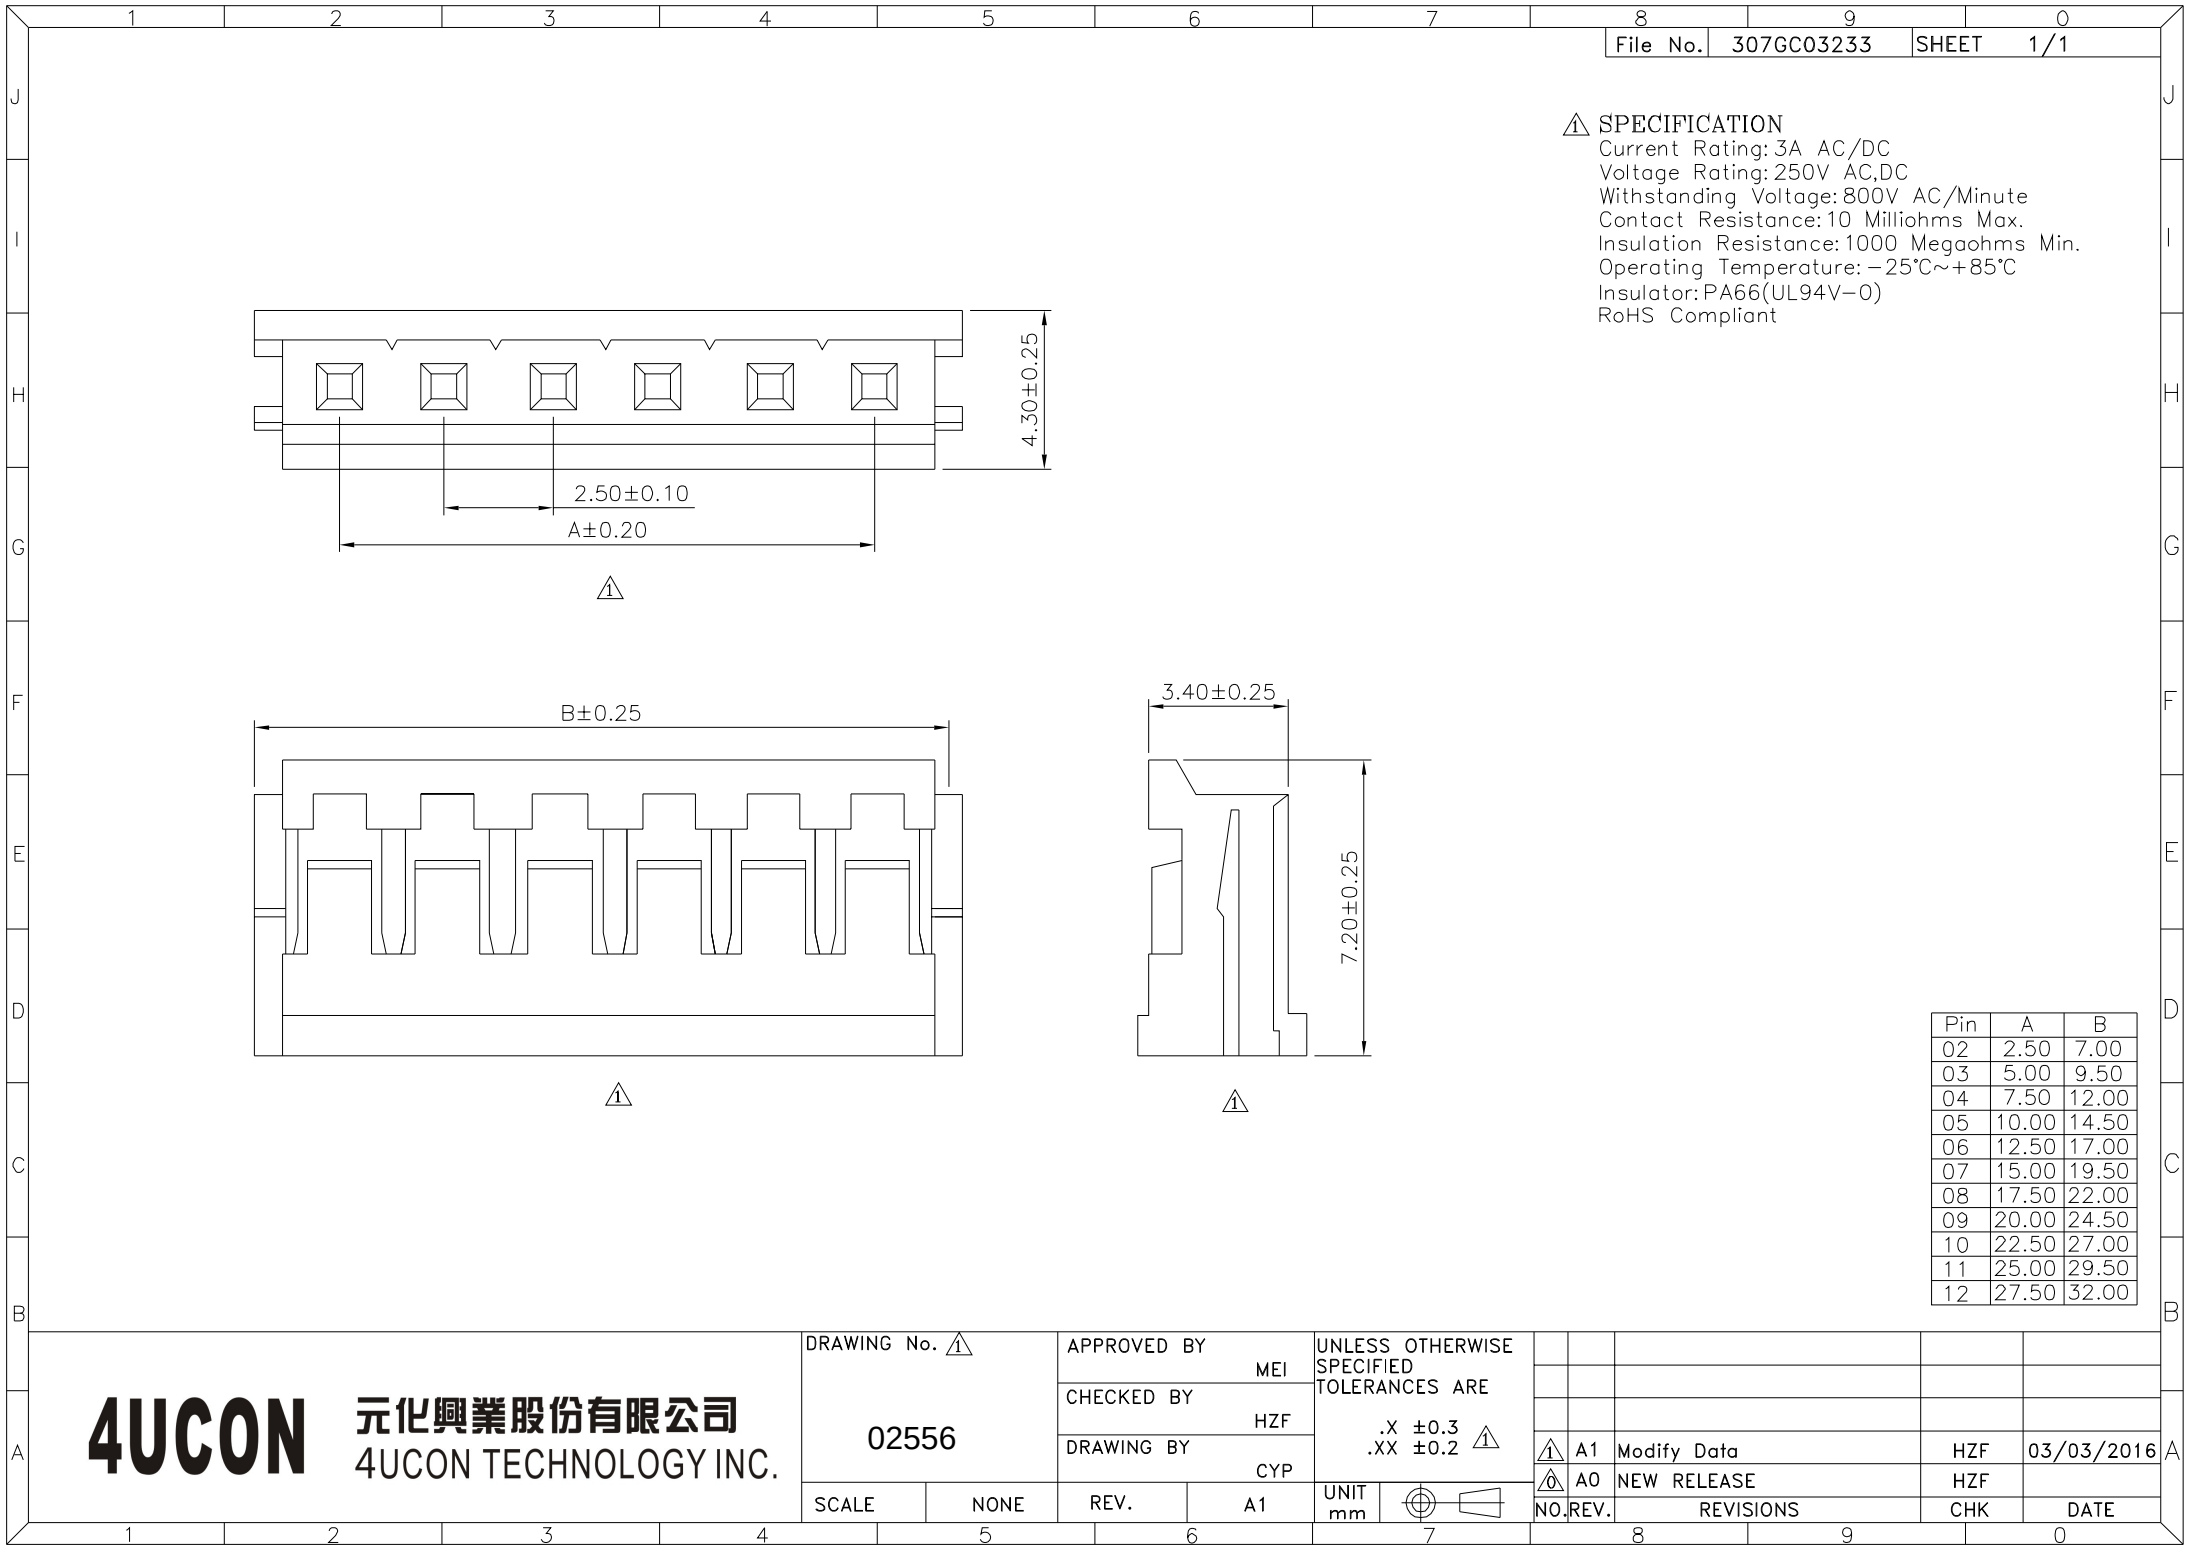

△ SPECIFICATION
Current Rating: 3A AC/DC
Voltage Rating: 250V AC,DC
Withstanding Voltage: 800V AC/Minute
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operating Temperature: -25°C~+85°C
Insulator: PA66(UL94V-0)
RoHS Compliant

Pin	A	B
02	2.50	7.00
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠ 02556		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2 ⚠						
		CHECKED BY HZF								
		DRAWING BY CYP								
SCALE	NONE	REV.	A1	UNIT mm		⚠ A1 ⚠ A0	Modify Data NEW RELEASE	HZF HZF	03/03/2016	A
						NO. REV.	REVISIONS	CHK	DATE	