



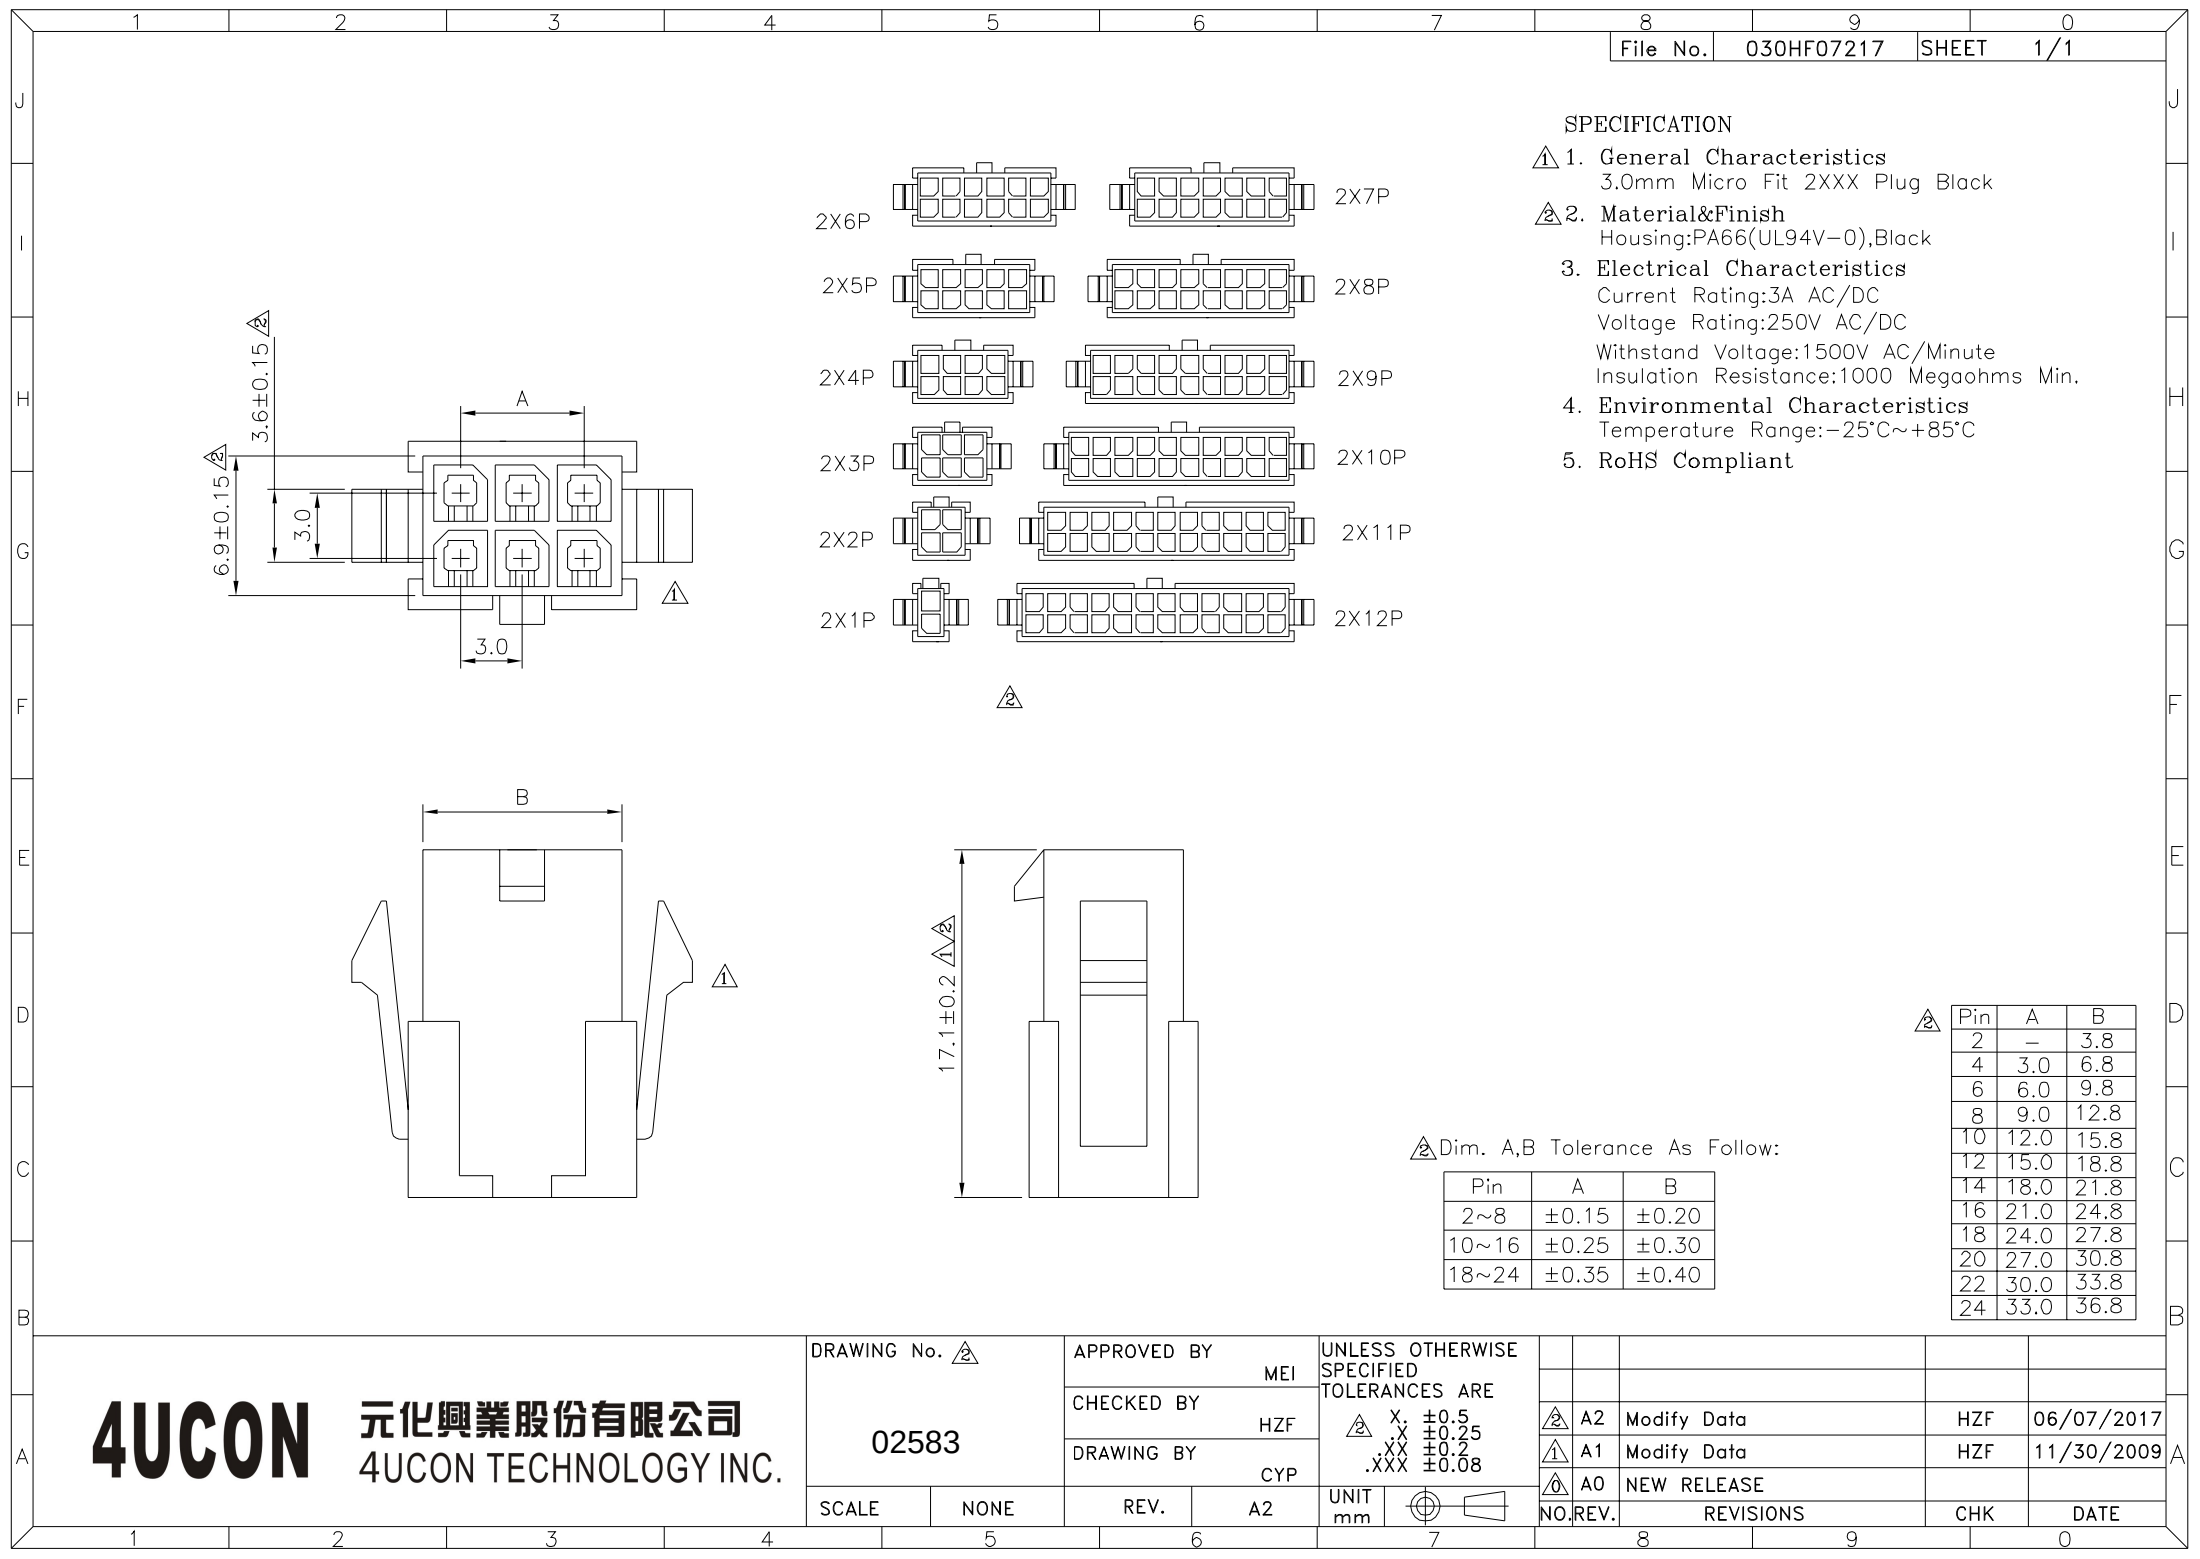

SPECIFICATION

1. General Characteristics
3.0mm Micro Fit 2XXX Plug Black
2. Material&Finish
Housing:PA66(UL94V-0),Black
3. Electrical Characteristics
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
4. Environmental Characteristics
Temperature Range:-25°C~+85°C
5. RoHS Compliant

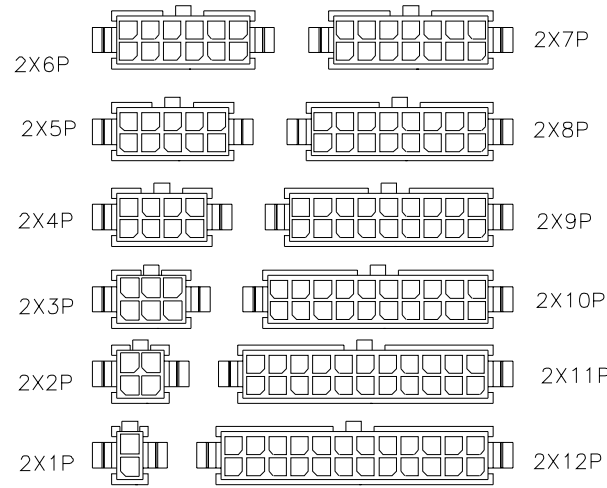

Pin	A	B
2	-	3.8
4	3.0	6.8
6	6.0	9.8
8	9.0	12.8
10	12.0	15.8
12	15.0	18.8
14	18.0	21.8
16	21.0	24.8
18	24.0	27.8
20	27.0	30.8
22	30.0	33.8
24	33.0	36.8

Dim. A,B Tolerance As Follow:

Pin	A	B
2~8	±0.15	±0.20
10~16	±0.25	±0.30
18~24	±0.35	±0.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02583

02583

SCALE NONE

REV. A2

APPROVED BY MEI


CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X ±0.5
XX ±0.25
XXX ±0.2
.XXX ±0.08

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
A2	Modify Data	HZF	06/07/2017	
A1	Modify Data	HZF	11/30/2009	
A0	NEW RELEASE			