



Recommended P.C.B. Layout For 15 Pin

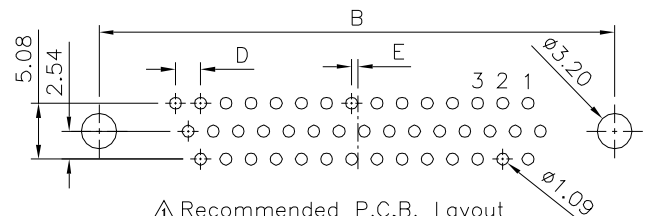


Recommended P.C.B. Layout For 26,44,62 Pin

SPECIFICATION


Current Rating:1 Amps
 Withstanding Voltage:500V For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operating Temperature:-40°C~+85°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:C2680
 Gold Flash On Contact Area,Tin Plated
 On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated
 Boardlock:SPCC,Tin Plated
 Rivet:C3604,Nickel Plated
 RoHS Compliant

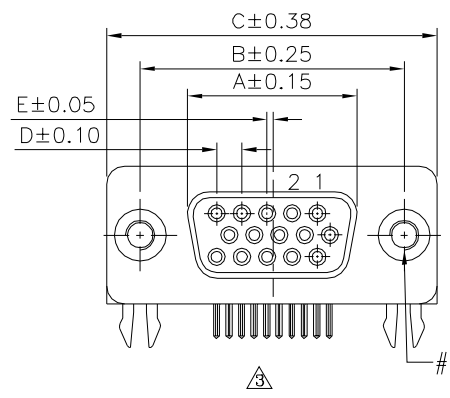


#4-40UNC

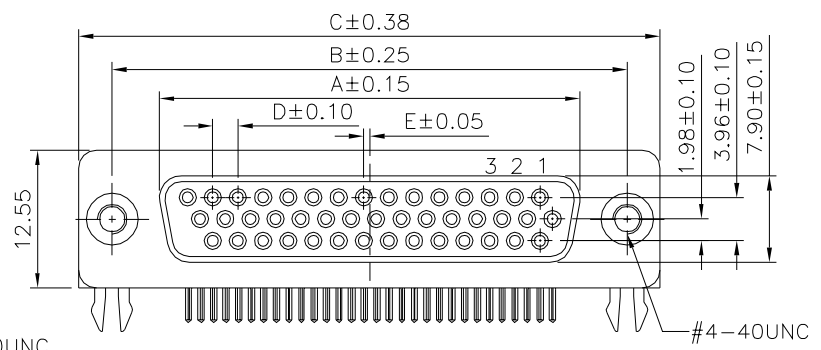


#4-40UNC

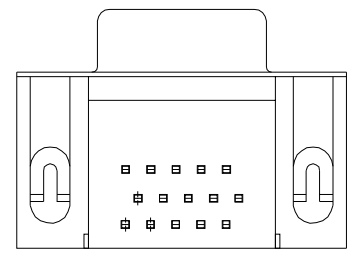

15 Pin

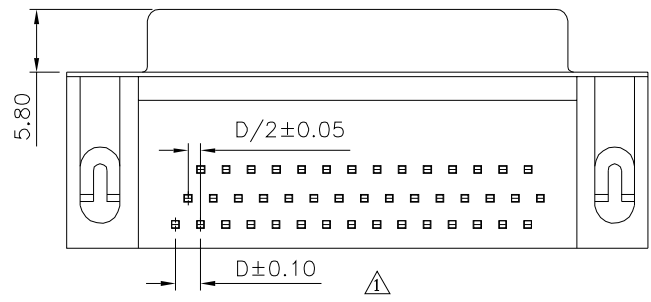

26,44,62 Pin

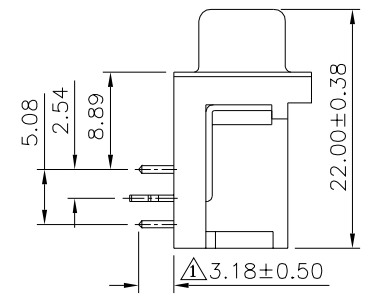

Pin	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.80	33.32	39.20	2.29	0.50
44	38.38	47.04	53.04	2.29	0.50
62	54.84	63.50	69.40	2.41	0.60

4U CON 元化興業股份有限公司
 4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX* ±3* .XX ±0.25 .XX* ±1* .XXX ±0.05 .XXX* ±0.5*
02630		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	B3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	11/16/2018
△	B2	Modify Data	HZF	07/18/2017
△	B1	Modify Data	HZF	12/24/2015
△	B0	NEW RELEASE	HZF	08/16/2013