
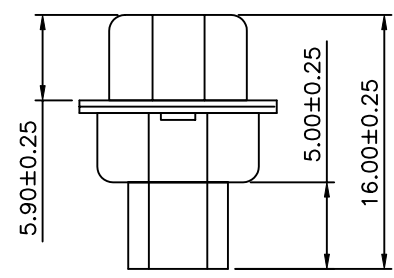
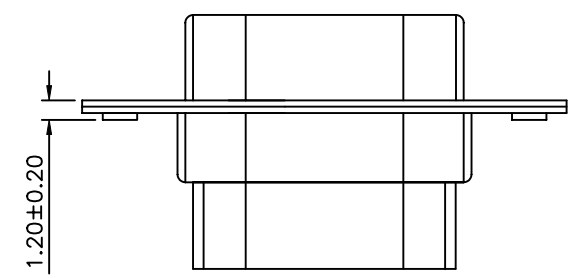


SPECIFICATION
 Current Rating: 1A Max.
 Dielectric Withstanding Voltage:
 500V(AC) For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 At DC 500V
 Total Mating Force: 4.0 Kgf Max.
 Total Unmating Force: 1.5 Kgf Min.
 Temperature Range: -55°C~+105°C
 RoHS Compliant

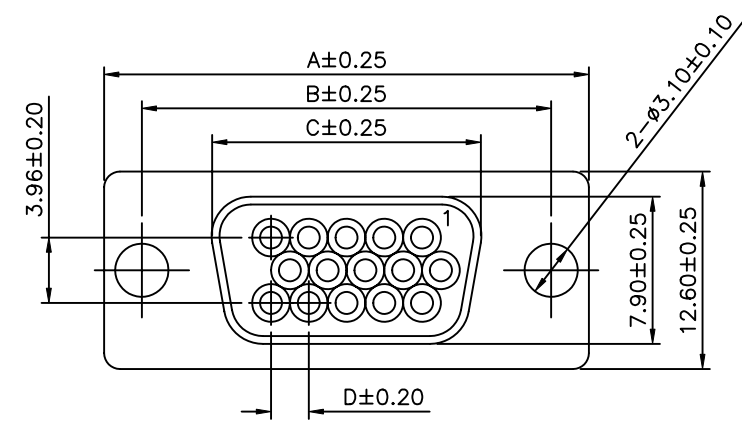

Contact	A	B	C	D
15	30.80	25.00	16.33	2.29
26	39.20	33.32	24.66	2.29
44	53.05	47.04	38.38	2.29
62	69.40	63.50	54.84	2.41

No.	Part Name	Q'ty	Material	Remarks&Thickness	Finish
1	Housing	2	P.B.T	UL 94V-0	Black
2	Contact	15~62	Brass	T=0.20mm	Gold Flash
3	Front-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
4	Back-Shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 02661

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 LXX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.3
 .XX ±0.20
 .XXX ±0.100
 ANG. ±1°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B0	NEW RELEASE	HZF	11/15/2008

SCALE NONE REV. B0