
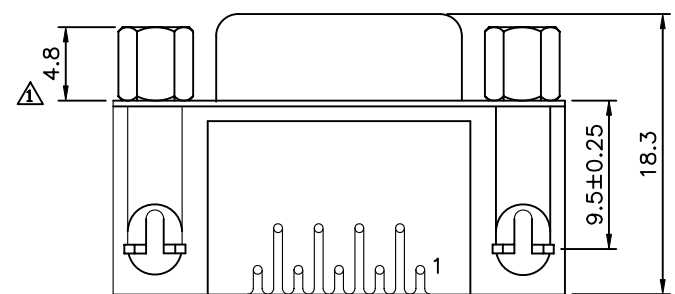
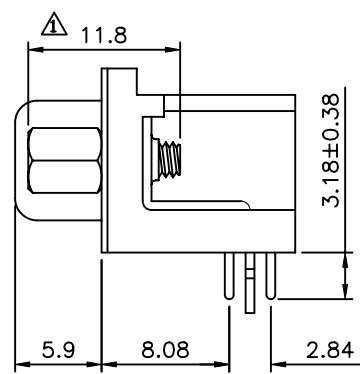
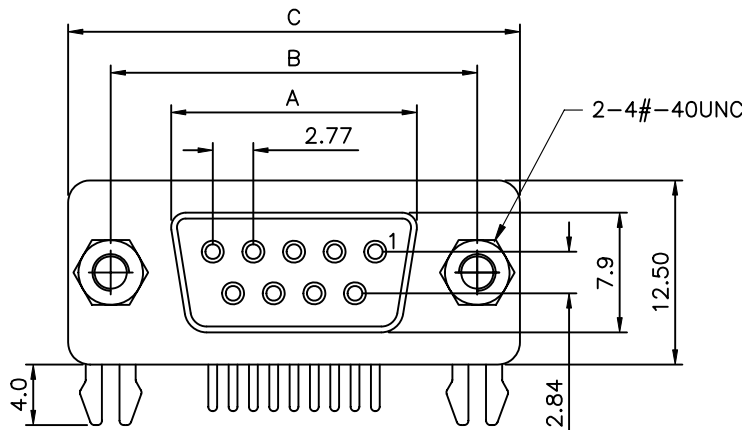


△ SPECIFICATION

Current Rating: 5Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 15 Milliohms Max.
 Operation Temperature: -55°C~+105°C
 Insulator: PBT UL94V-0, Black
 Contact: Copper Alloy
 Selective Gold Flash Over Nickel
 Shell: Steel, Nickel Plated
 Boardlock: Steel, Tin Plated
 RoHS Compliant

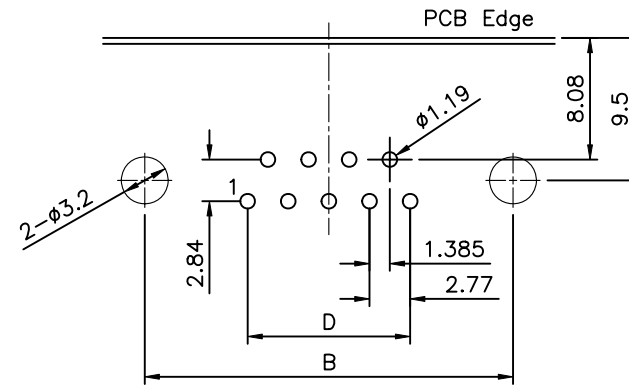

△

Position	A±0.20	B±0.20	C±0.38	D
9	16.30	25.00	30.80	11.08
15	24.60	33.30	39.20	19.39
25	38.35	47.05	53.05	33.24
37	54.80	63.50	69.40	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG ±1°
02788		MEI		
		CHECKED BY HZF		
		DRAWING BY LXX		
SCALE	NONE	REV.	B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	09/01/2009
△ B0		NEW RELEASE	HZF	03/13/2007