

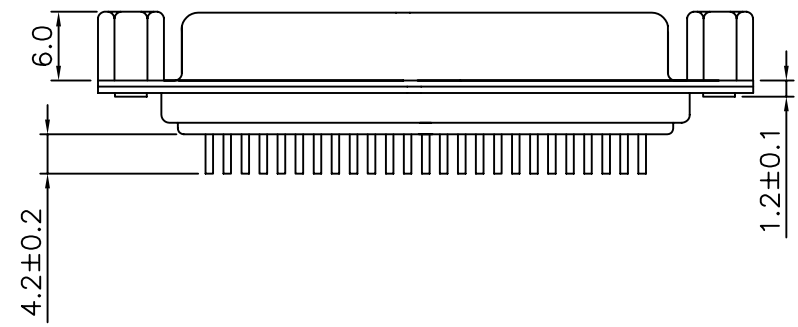


SPECIFICATIONS:

Contact Current Rating: 1 Ampere
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance : 500Megohms Min. At DC 500V
 Contact Resistance: 30Milliohms. Max.
 Operating Temperature: -40°C ~ +70°C
 Contact: Brass , Gold Flashed
 Insulator: P.B.T. UL94V-0 Rated
 Shell: Cold Rolled Steel, Nickel , Tin, Zinc Plated

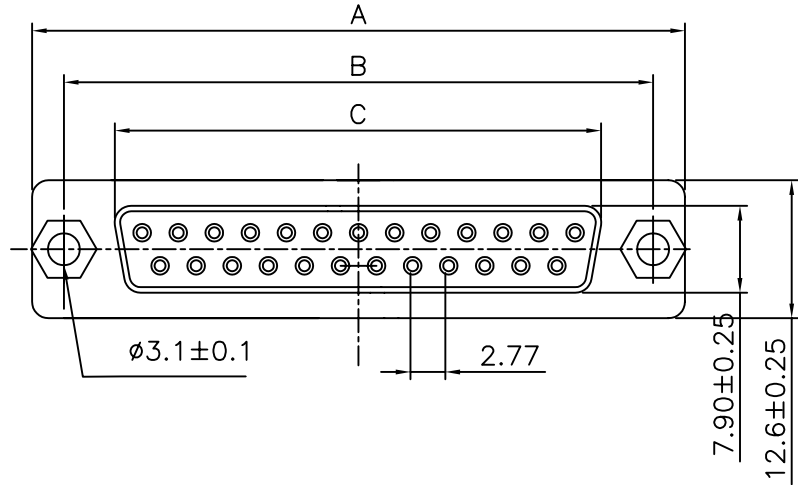

Circuits	A ± 0.25	B ± 0.25	C ± 0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
19	44.80	38.86	30.00
23	50.30	44.30	35.50
25	53.05	47.04	38.40
37	69.40	63.50	54.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.38 .XX ± 0.25 AWG.				
02902		MEI						
		RAN						
		DRAWING BY		UNIT mm				A NEW RELEASE NO. REV. REVISIONS
SCALE	NONE	REV.	A					