
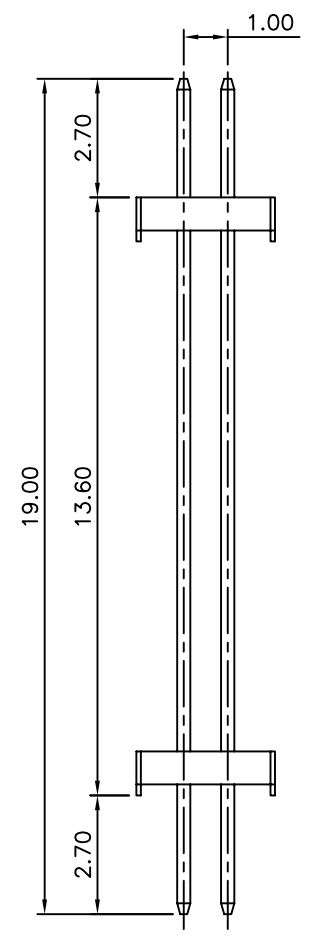


SPECIFICATION
 Current: 1A
 Operating Temperature: -55°C To +105°C
 Contact Resistance: 20 Milliohms MAX.
 Insulation Resistance: 5000 Megaohms Min.
 Dielectric Strength: 1000V AC Min
 Durability: 100 Cycles
 Retention Force: 700g Min
 Housing: Thermoplastic UL94V-0
 Contact: Copper Alloys

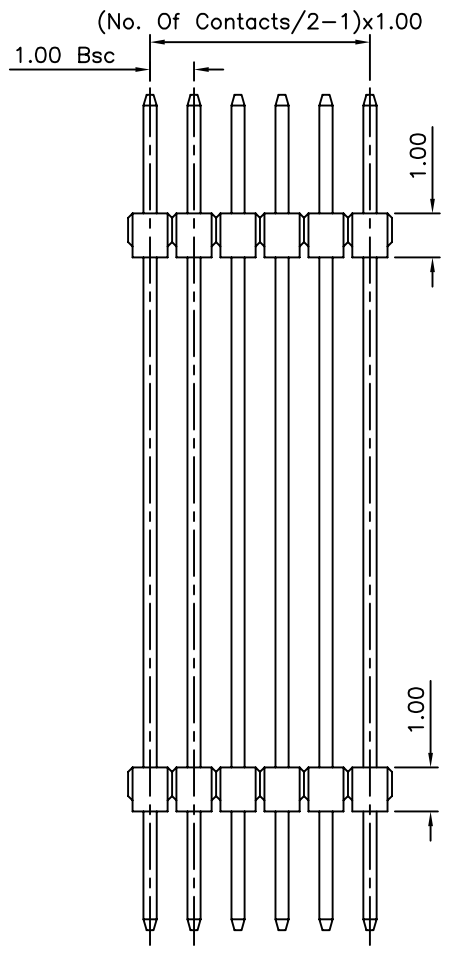

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG ±5°
02975		MEI		
		CHECKED BY HZF		
		DRAWING BY		
		PEGA		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	06/07/2006