


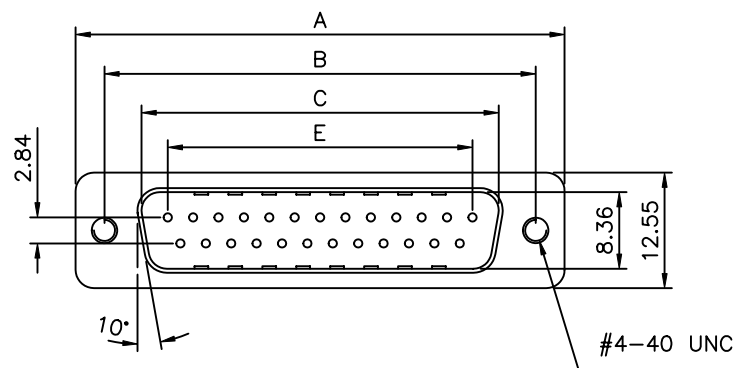
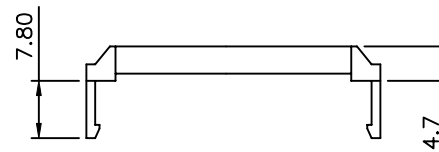



SPECIFICATION

Current Rating:3 Amp
 Voltage Rating:250V AC/Rms 60Hz
 Dielectric Withstanding Voltage:
 1000V AC/Rms 60Hz For 1 Minute
 Contact Resistance:20 Milliohms Max At 1Amp DC
 Insulator Resistance:1000Megohms At 500V DC
 Contact:Brass
 Housing:Glass-Filled Thermoplastic PBT, UL 94V-0
 Shell:Steel,Tin Over Copper
 Clinch Nut:Brass,Nickel Plated
 RoHS Compliant

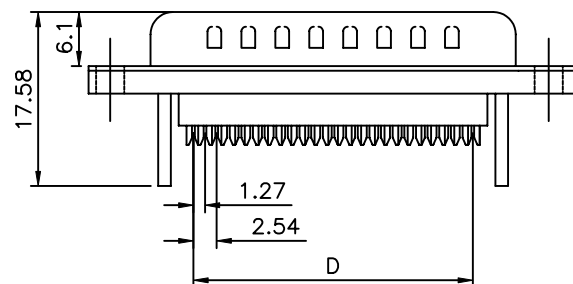

Cover



Strain Relief

Pin	A	B	C	D	E
9	30.81	24.99	16.92	10.16	11.08
15	39.20	33.30	25.25	17.78	19.39
25	53.05	47.04	38.96	30.48	33.24
37	69.40	63.50	55.42	45.72	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03024

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.38 X.* ±3*
 .X ±0.25 .X* ±1.0*
 .XX ±0.13

SCALE


NONE

REV.

B0

UNIT

mm



△ B0

NEW RELEASE

HZF

11/18/2008

NO. REV.

REVISIONS

CHK

DATE