



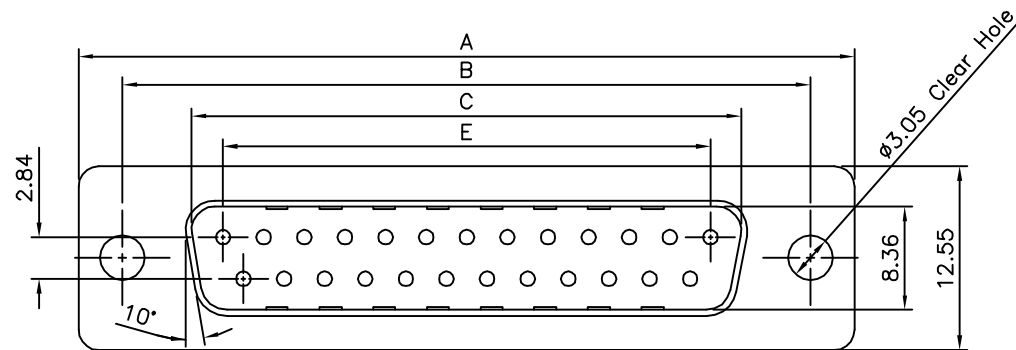




△ SPECIFICATION

Current Rating:3 Amp
Voltage Rating:250V AC/RMS 60Hz
Contact Resistance:20 Milliohms Max. At 1 Amp DC
Insulation Resistance:1000 Megaohms At 500V DC
Dielectric Withstand Voltage:1000V AC/RMS 60Hz
For 1 Minute


Insulator:PBT+G.F.(UL94V-0)
Contact:Copper Alloy,Selective Gold Flash Over Nickel
Shell:Steel,Nickel Plated Over Copper
S.R.:SUS304
RoHS Compliant

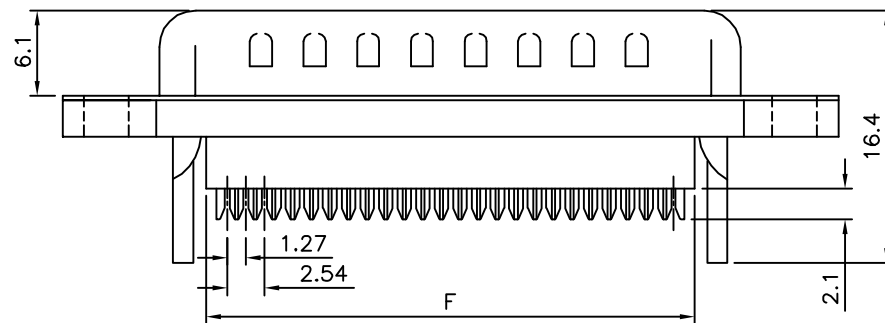

① With Insulator Support

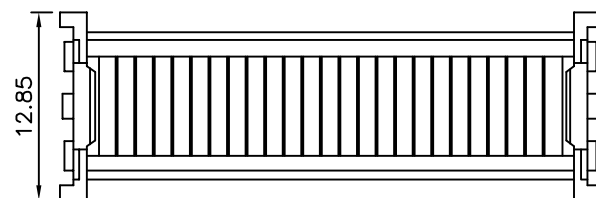

1 Cover

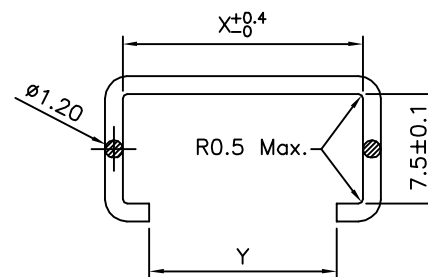

△ Pin	A	B	C	E	F	X	Y
09	30.81	24.99	16.92	11.08	13.10	16.3	12.9 ^{+0.1} _{-0.1}
15	39.20	33.30	25.25	19.39	20.70	24.2	20.8 ^{+0.4} _{-0.4}
25	53.04	47.04	38.96	33.24	33.68	38.6	34.9 ^{+0.1} _{-0.1}
37	69.40	63.50	55.42	49.86	50.30	54.8	51.4 ^{+0.1} _{-0.1}

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03027

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SON

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

 $\triangle 1$ X. ± 0.38 X.° $\pm 3^\circ$

	$X \pm 0.25$	$X' \pm 1.0'$
--	--------------	---------------

G	.XX ±0.13
---	-----------

	UNIT
	100 100



0.

1

	A1
--	----

	Modify Data
--	-------------

HZF

05/28/2013

△U	AU
NO	REV

RELEASE

REVISIONS

CHK

DATE _____