

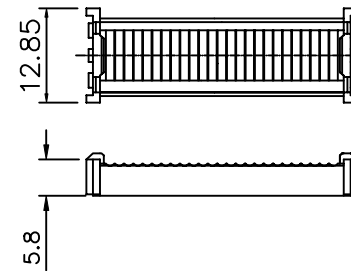
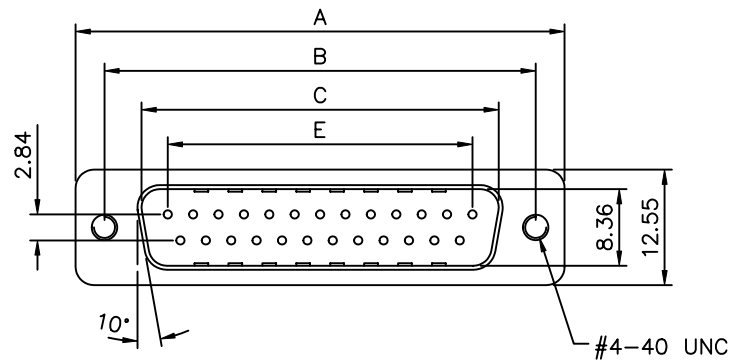
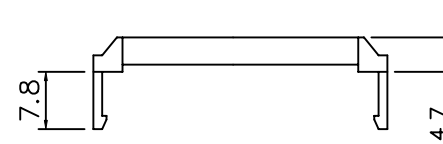

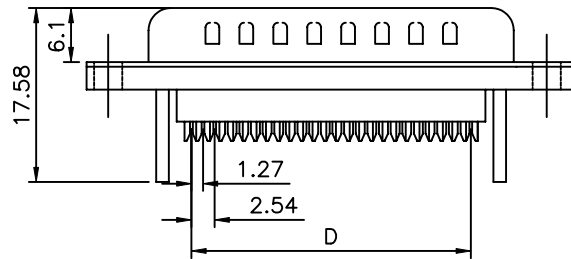


SPECIFICATION

Current Rating:3 Amp
Voltage Rating:250V AC/Rms 60Hz
Dielectric Withstanding Voltage:
1000V AC/Rms 60Hz For 1 Minute
Contact Resistance:20 Milliohms Max At 1Amp DC
Insulator Resistance:1000Megohms At 500V DC
Contact:Brass
Housing:Glass-Filled Thermoplastic PBT, UL 94V-0
Shell:Steel,Tin Over Copper
Clinch Nut:Brass,Nickel Plated
Screwlock:Brass,Nickel Plated
RoHS Compliant

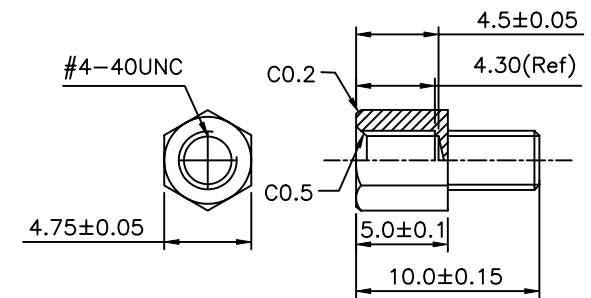

Cover



Strain Relief

Pin	A	B	C	D	E
9	30.81	24.99	16.92	10.16	11.08
15	39.20	33.30	25.25	17.78	19.39
25	53.05	47.04	38.96	30.48	33.24
37	69.40	63.50	55.42	45.72	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03028

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X. ±0.38
.X. ±0.25
.XX. ±0.13
.X. ±3°
.X. ±1.0°

SCALE

NONE

REV.

BO

UNIT

mm



BO

NEW RELEASE

HZF

11/18/2008

NO. REV.

REVISIONS

CHK

DATE