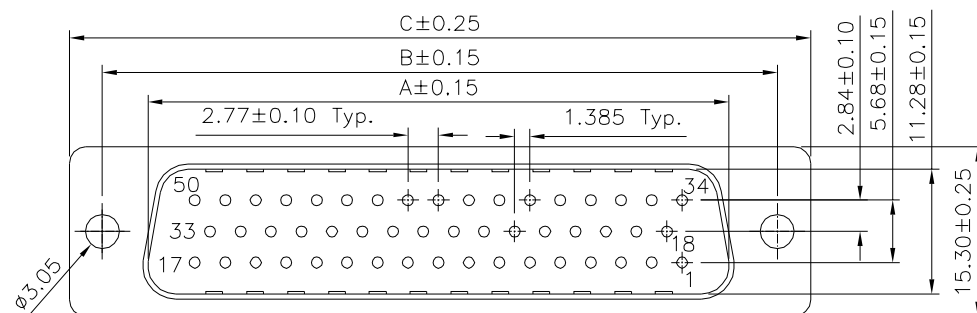

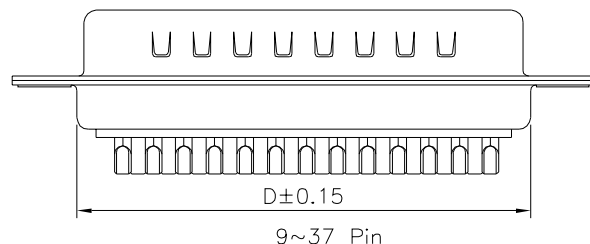
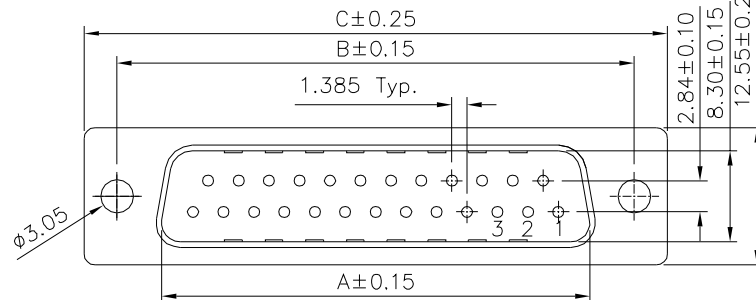


# SPECIFICATION

Current Rating:1 Amps  
Withstanding Voltage:500V(One Minute)  
Insulation Resistance:1000 Megaohms Min. At DC 500V  
Contact Resistance:30 Milliohms Max.  
Operating Temperature: -40°C~+85°C  
Contact:Brass  
Gold Plated On Contact Area,  
Tin Plated On Solder Tails,Over Nickel  
Insulator:PBT+30%G.F.(UL94V-0),Black  
Shell:SPCC,Nickel Plated Front,Tin Plated Rear  
RoHS Compliant

| Pin | A     | B     | C     | D     |
|-----|-------|-------|-------|-------|
| 09  | 16.92 | 24.99 | 30.81 | 19.20 |
| 15  | 25.25 | 33.32 | 39.20 | 27.70 |
| 25  | 38.96 | 47.04 | 53.04 | 41.10 |
| 37  | 55.42 | 63.50 | 69.40 | 57.30 |
| 50  | 52.81 | 61.00 | 67.00 | 55.10 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
**03215**

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38 .X\* ±3\*  
.XX ±0.25 .XX\* ±1\*  
.XXX ±0.05 .XXX\* ±0.5\*

UNIT mm  
NO. REV. A0 NEW RELEASE HZF 12/07/2016  
REVISIONS CHK DATE