

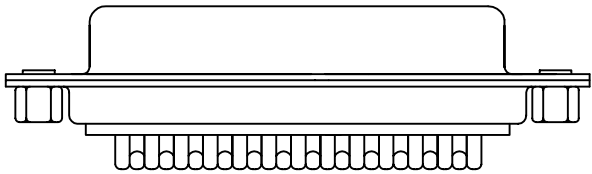


SPECIFICATIONS:

Contact Current Rating:1 Amp
Dielectric Withstanding Voltage: AC 500V R.M.S.
Insulation Resistance : 500Megohms Min. At DC 500V
Contact Resistance:30Milliohms. Max.
Operating Temperature:-55°C ~+105°C
Contact:Brass ,Tin Plated
Insulator:P.B.T.UL94V-0 Rated
Shell:Cold Rolled Steel,Tin Plated

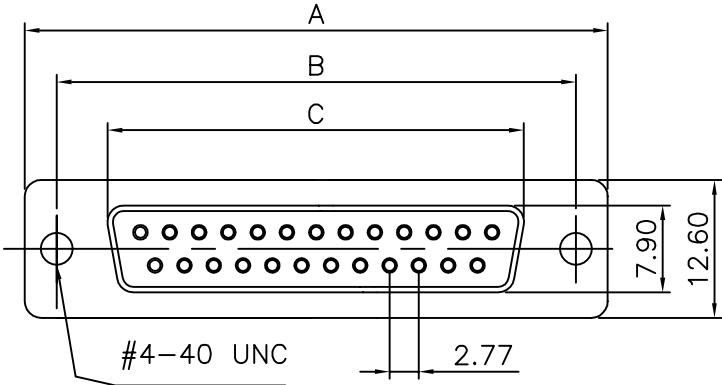

Positions	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
19	44.90	38.86	30.00
23	50.30	44.30	35.50
25	53.05	47.04	38.40
37	69.40	63.50	54.80

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
03340


APPROVED BY MEI
CHECKED BY RAN
DRAWING BY HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

SCALE NONE

REV. A

UNIT mm



AREA

REVISIONS

CHK

DATE