
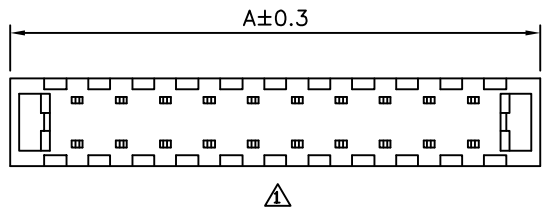

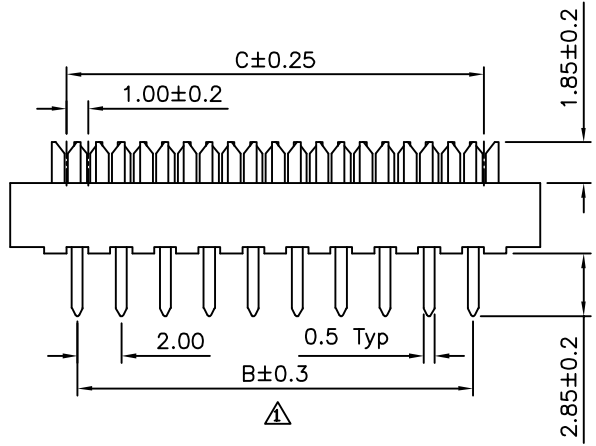

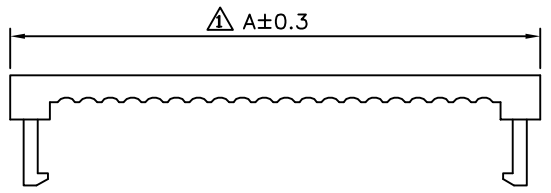


△ SPECIFICATION
 Withstanding Voltage: AC 500V For 1 Minute
 Contact Resistance: 1 Ohms Max.
 Insulation Resistance: 100 Megaohms Min.
 At DC 500V
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT+G.F.(UL94V-0), Black
 Contact: Phosphor Copper
 Selective Gold Flash Over Nickel
 RoHS Compliant

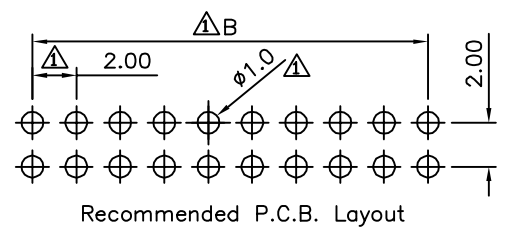

| Pos. | A | B | C | Pos. | A | B | C |
|------|-------|-------|-------|------|-------|-------|-------|
| 06 | 10.10 | 4.00 | 5.00 | 34 | 38.10 | 32.00 | 33.00 |
| 08 | 12.10 | 6.00 | 7.00 | 36 | 40.10 | 34.00 | 35.00 |
| 10 | 14.10 | 8.00 | 9.00 | 38 | 42.10 | 36.00 | 37.00 |
| 12 | 16.10 | 10.00 | 11.00 | 40 | 44.10 | 38.00 | 39.00 |
| 14 | 18.10 | 12.00 | 13.00 | 42 | 46.10 | 40.00 | 41.00 |
| 16 | 20.10 | 14.00 | 15.00 | 44 | 48.10 | 42.00 | 43.00 |
| 18 | 22.10 | 16.00 | 17.00 | 46 | 50.10 | 44.00 | 45.00 |
| 20 | 24.10 | 18.00 | 19.00 | 48 | 52.10 | 46.00 | 47.00 |
| 22 | 26.10 | 20.00 | 21.00 | 50 | 54.10 | 48.00 | 49.00 |
| 24 | 28.10 | 22.00 | 23.00 | 52 | 56.10 | 50.00 | 51.00 |
| 26 | 30.10 | 24.00 | 25.00 | 54 | 58.10 | 52.00 | 53.00 |
| 28 | 32.10 | 26.00 | 27.00 | 56 | 60.10 | 54.00 | 55.00 |
| 30 | 34.10 | 28.00 | 29.00 | 58 | 62.10 | 56.00 | 57.00 |
| 32 | 36.10 | 30.00 | 31.00 | 60 | 64.10 | 58.00 | 59.00 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 03518
 APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY QQJ
 SCALE NONE REV. A1
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ X. ±0.3
 .X ±0.2
 .XX ±0.1
 .XXX ±0.03
 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------------------|-------|------------|
| △ A1 | | Modify Data & Add 6 Pin | HZF | 09/08/2010 |
| △ A0 | | NEW RELEASE | BECKY | 04/29/2005 |