
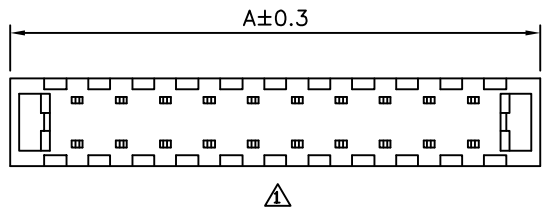

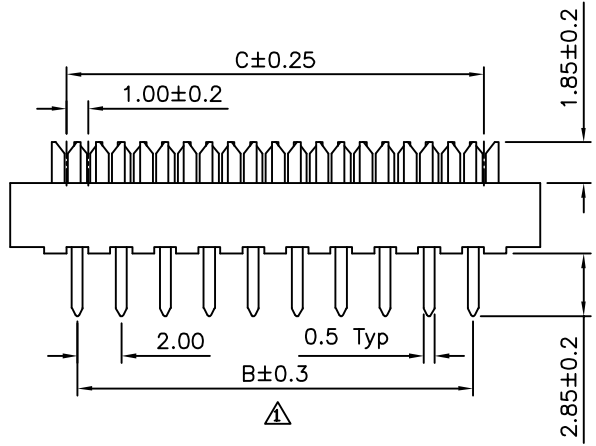

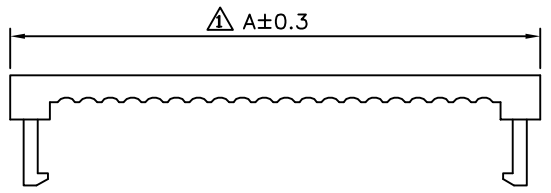


**△ SPECIFICATION**  
 Withstanding Voltage: AC 500V For 1 Minute  
 Contact Resistance: 1 Ohms Max.  
 Insulation Resistance: 100 Megaohms Min.  
 At DC 500V  
 Operation Temperature: -40°C ~ +105°C  
 Insulator: PBT+G.F.(UL94V-0), Black  
 Contact: Phosphor Copper  
 Selective Gold Flash Over Nickel  
 RoHS Compliant

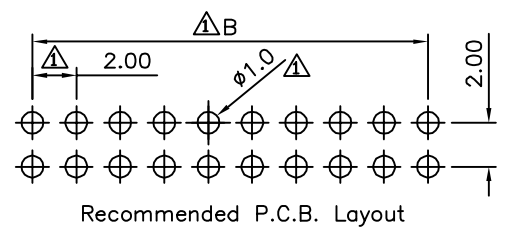

Pos.	A	B	C	Pos.	A	B	C
06	10.10	4.00	5.00	34	38.10	32.00	33.00
08	12.10	6.00	7.00	36	40.10	34.00	35.00
10	14.10	8.00	9.00	38	42.10	36.00	37.00
12	16.10	10.00	11.00	40	44.10	38.00	39.00
14	18.10	12.00	13.00	42	46.10	40.00	41.00
16	20.10	14.00	15.00	44	48.10	42.00	43.00
18	22.10	16.00	17.00	46	50.10	44.00	45.00
20	24.10	18.00	19.00	48	52.10	46.00	47.00
22	26.10	20.00	21.00	50	54.10	48.00	49.00
24	28.10	22.00	23.00	52	56.10	50.00	51.00
26	30.10	24.00	25.00	54	58.10	52.00	53.00
28	32.10	26.00	27.00	56	60.10	54.00	55.00
30	34.10	28.00	29.00	58	62.10	56.00	57.00
32	36.10	30.00	31.00	60	64.10	58.00	59.00

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.3 .X ±0.2 .XX ±0.1 .XXX ±0.03
03520		MEI		
		CHECKED BY HZF		
		DRAWING BY QQJ		
SCALE	NONE	REV.	A1	UNIT mm

△ A1	Modify Data & Add 6 Pin	HZF	09/08/2010
△ A0	NEW RELEASE	BECKY	04/29/2005
NO. REV.	REVISIONS	CHK	DATE